

SUPPORT FOR AOS01 WITH BALLAST

FLAT ROOFS

Designed for flat roofs with inclines up to 5°.

UNOBTRUSIVE

System which does not require the roofing to be drilled, thereby preventing thermal bridges and ensuring the structure waterproofing.

PACKAGING

Extremely compact packaging that takes up little space.



CODES AND DIMENSIONS

CODE	material	r [mm]	pcs.
BLOCK	stainless steel 1.4301 - AISI304	940	1

AOS01 anchor point not included in the package, can be ordered separately.
Cement slab (500 x 500 mm) for ballast not included in the package.
Mats included in the box.


COMPLEMENTARY PRODUCTS

ACCESSORIES


CODE	description	p.
AOS01	swivel eyelet	98

TECHNICAL DATA

LABORATORY STRENGTHS



Data	Standard	Value
Q _s	EN 795:2012 - CEN/TS 16415:2013	13 kN
Q _{d2}	EN 795:2012 - CEN/TS 16415:2013	12 kN

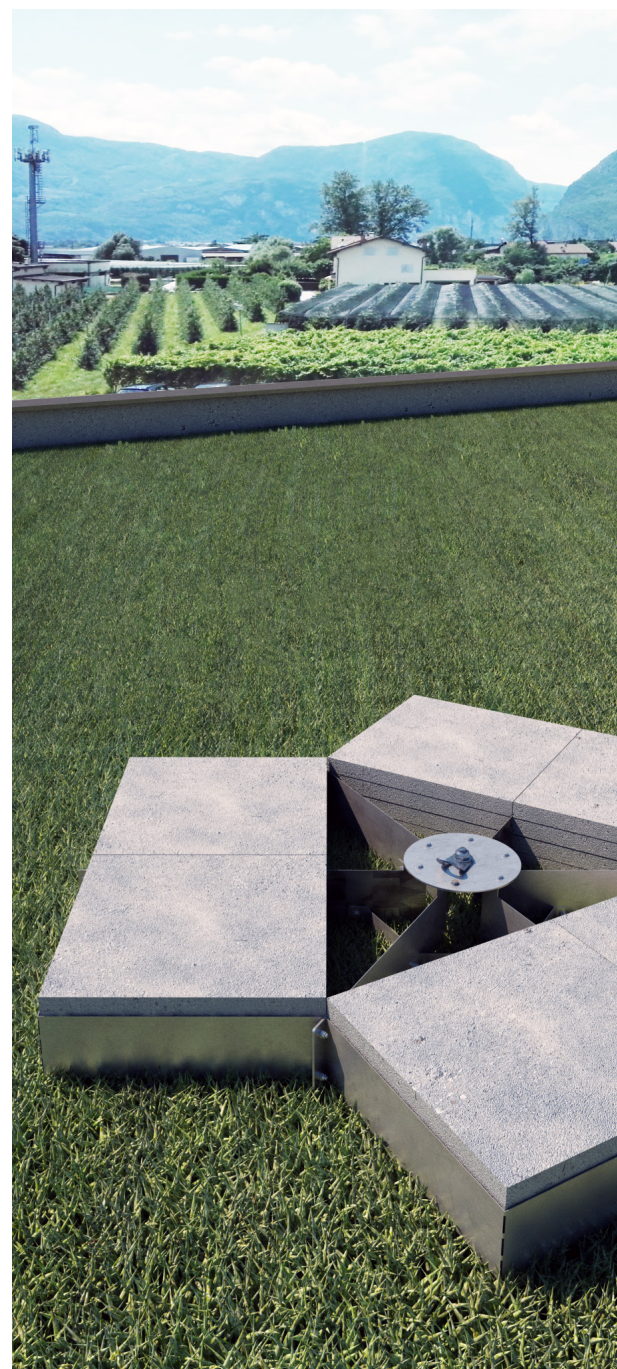

SURFACE INCLINATION



FIELD OF USE

- Non-drillable flat roof
- Green roof