

KKF


Exterior screws, pan head

Stainless steel AISI410




SPECIAL THREADING

Longer length (60%) asymmetric "umbrella" thread




FINE THREAD

Fine thread for the utmost precision when tightening is complete




PAN HEAD

Guarantees an excellent surface finish and the possibility of usage on steel plates with circular holes




STAINLESS STEEL AISI410

Martensitic stainless steel with an excellent balance between mechanical resistance and corrosion resistance



FIELDS OF USE

Exterior use; appropriate for service classes 1-2-3





AESTHETICS AND PRECISION

The pan head with the flat under head compresses the fibres when tightening is complete and guarantees a perfect aesthetic finish. The fine thread guarantees the utmost precision during tightening



TORSIONAL STRENGTH

The AISI410 martensitic stainless steel has good torsional strength (magnetic steel like carbon steel), which means pre-bored holes can be avoided in many situations




WIDE RANGE

Lengths available from 20mm to 200mm for a vast range of different applications

Applications




Fastening of exterior fences



Fastening of TERRALOCK PP connector (long version) with KKF screws



Fastening of TERRALOCK PP connector (short version) with KKF screws

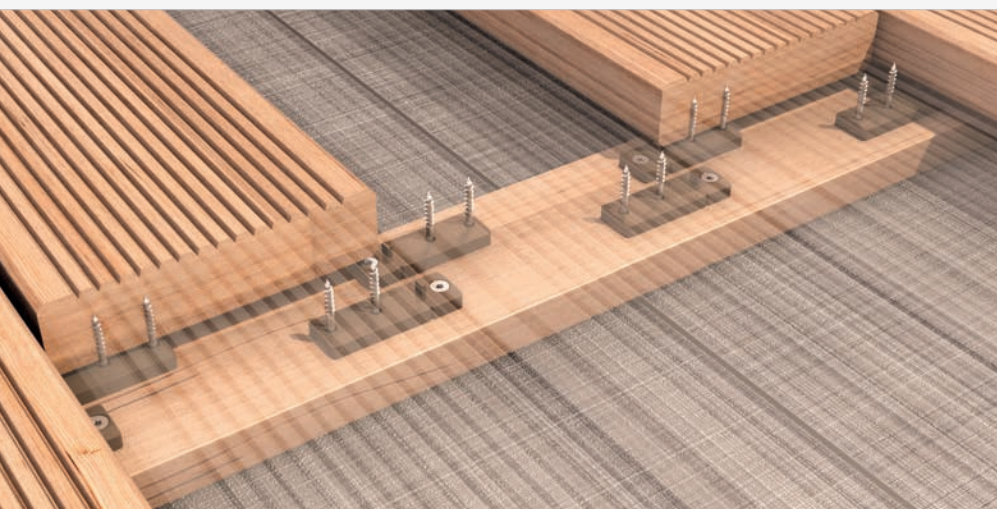


Hidden connectors for patios and façades




connector	code	L x B x H [mm]	description	pcs /pkg.
TERRALOCK PP	TER60PPM	60 x 20 x 8	plastic RAL8017 connector for wooden patios (short version)	100
	TER180PPM	180 x 20 x 8	plastic RAL8017 connector for wooden patios (long version)	50

Codes and dimensions

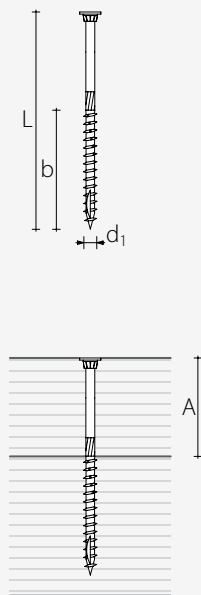

d ₁ [mm]	code	L [mm]	b [mm]	A [mm]	pcs/pkg
4 TX20	KKF430	30	18	12	500
	KKF435	35	20	15	
	KKF440	40	24	16	
	KKF445	45	30	15	200
	KKF450	50	30	20	
4,5 TX20	KKF4520	20	15	5	100
	KKF4525	25	20	5	
	KKF4530	30	25	5	
	KKF4540	40	24	16	250
	KKF4545	45	30	15	
	KKF4550	50	30	20	
	KKF4560	60	35	25	200
	KKF4570	70	40	30	
5 TX25	KKF540	40	24	16	200
	KKF545	45	30	15	
	KKF550	50	30	20	
	KKF560	60	35	25	
	KKF570	70	40	30	100
	KKF580	80	50	30	
	KKF590	90	55	35	
	KKF5100	100	60	40	
6 TX30	KKF670	70	40	30	100
	KKF680	80	50	30	
	KKF690	90	55	35	
	KKF6100	100	60	40	
	KKF6120	120	75	45	
	KKF6140	140	80	60	
	KKF6160	160	90	70	
	KKF6180	180	100	80	
	KKF6200	200	100	100	


SHEAR V_{adm}



WOOD-WOOD


d_1 [mm]	L [mm]	V_{adm}
4	≥ 40	26 kg
4,5	≥ 50	34 kg
5	≥ 60	43 kg
6	≥ 70	61 kg

THREAD WITHDRAWAL N_{adm}



d_1 [mm]	Length L [mm]												
	30	35	40	45-50	60	70	80	90	100	120	140	160	180-200
4	36 kg	40 kg	48 kg	60 kg	-	-	-	-	-	-	-	-	-
4,5	56 kg	-	54 kg	68 kg	79 kg	90 kg	-	-	-	-	-	-	-
5	-	-	60 kg	75 kg	88 kg	100 kg	125 kg	138 kg	150 kg	-	-	-	-
6	-	-	-	-	-	120 kg	150 kg	-	180 kg	225 kg	240 kg	270 kg	300 kg

HEAD PENETRATION N_{adm}



d_1 [mm]	N_{adm}
4	30 kg
4,5	39 kg
5	48 kg
6	70 kg

CALCULATION FORMULAS - SHEAR DIN 1052-2:1988

WOOD-WOOD

$$V_{adm} = \min \{ 0,4 \cdot A \cdot d_1; 1,7 \cdot d_1^2 \}$$

d_1 [mm]
A [mm]
 V_{adm} [kg]

EXAMPLE WOOD-WOOD

KKF 5 x 80 mm

$$d_1 = 5 \text{ mm}$$

$$A = 30 \text{ mm}$$

$$V_{adm} = \min \{ 0,4 \cdot A \cdot d_1; 1,7 \cdot d_1^2 \}$$


$$V_{adm} = \min \{ 0,4 \cdot 30 \cdot 5; 1,7 \cdot 5^2 \} = \min \{ 60; 43 \} = 43 \text{ kg}$$

NOTE

- Allowable values in accordance with DIN 1052:1988.
- The allowable extraction values are calculated considering the threaded part as being completely inserted into the wood.

Geometry and minimum distances

GEOMETRY AND MECHANICAL CHARACTERISTICS



KKF SCREW

Nominal diameter	d_1 [mm]	4	4,5	5	6
Head diameter	d_k [mm]	7,80	8,8	9,8	11,8
Tip diameter	d_2 [mm]	2,60	3,05	3,25	4,05
Shank diameter	d_s [mm]	2,90	3,35	3,60	4,30
Head thickness	t_1 [mm]	5,00	5,00	6,00	7,00
Pre-bored hole diameter	d_v [mm]	2,5	3,0	3,0	4,0
Characteristic yield moment	$M_{y,k}$ [Nmm]	3032,6	4119,1	5417,2	9493,7
Characteristic extraction-resistance parameter	$f_{ax,k}$ [N/mm ²]	11,7	11,7	11,7	11,7
Characteristic head-penetration parameter	$f_{head,k}$ [N/mm ²]	16,5	16,5	16,5	16,5
Characteristic tensile strength	$f_{tens,k}$ [kN]	5,0	6,4	7,9	11,3



MINIMUM DISTANCES FOR SHEAR LOADS

$\alpha = 0^\circ$

$\alpha = 90^\circ$

SCREWS INSERTED WITH PRE-BORED HOLES ⁽¹⁾

	4	4,5	5	6	4	4,5	5	6
a_1 [mm]	20	23	25	30	16	18	20	24
a_2 [mm]	12	14	15	18	16	18	20	24
$a_{3,t}$ [mm]	48	54	60	72	28	32	35	42
$a_{3,c}$ [mm]	28	32	35	42	28	32	35	42
$a_{4,t}$ [mm]	12	14	15	18	20	23	25	30
$a_{4,c}$ [mm]	12	14	15	18	12	14	15	18



Angle between strength and grain $\alpha = 0^\circ$ Angle between strength and grain $\alpha = 90^\circ$

CHARACTERISTIC DENSITY: $\rho_k \leq 420 \text{ kg/m}^3$

$\alpha = 0^\circ$

$\alpha = 90^\circ$

SCREWS INSERTED WITHOUT PRE-BORED HOLES ⁽²⁾

	4	4,5	5	6	4	4,5	5	6
a_1 [mm]	40	45	60	72	20	23	25	30
a_2 [mm]	20	23	25	30	20	23	25	30
$a_{3,t}$ [mm]	60	68	75	90	40	45	50	60
$a_{3,c}$ [mm]	40	45	50	60	40	45	50	60
$a_{4,t}$ [mm]	20	23	25	30	28	32	35	42
$a_{4,c}$ [mm]	20	23	25	30	20	23	25	30



CHARACTERISTIC DENSITY: $420 \leq \rho_k \leq 500 \text{ kg/m}^3$

$\alpha = 0^\circ$


$\alpha = 90^\circ$

SCREWS INSERTED WITHOUT PRE-BORED HOLES ⁽³⁾


	4	4,5	5	6	4	4,5	5	6
a_1 [mm]	60	68	75	90	28	32	35	42
a_2 [mm]	28	32	35	42	28	32	35	42
$a_{3,t}$ [mm]	80	90	100	120	60	68	75	90
$a_{3,c}$ [mm]	60	68	75	90	60	68	75	90
$a_{4,t}$ [mm]	28	32	35	42	36	41	45	54
$a_{4,c}$ [mm]	28	32	35	42	28	32	35	42




stressed end
 $-90^\circ < \alpha < 90^\circ$




discharged end
 $90^\circ < \alpha < 270^\circ$



stressed edge
 $0^\circ < \alpha < 180^\circ$



unload edge
 $180^\circ < \alpha < 360^\circ$



NOTE

⁽¹⁾ The minimum distances comply with the EN 1995:2008 standard, in accordance with ETA-11/0030.

⁽²⁾ The minimum distances are in accordance with EN 1995:2008, according to ETA-11/0030, considering a mass density of the wood elements of $\rho_k \leq 420 \text{ kg/m}^3$.





⁽³⁾ The minimum distances comply with EN 1995:2008, according to ETA-11/0030, considering a mass density of the wood elements of $420 \leq \rho_k \leq 500 \text{ kg/m}^3$.

• In the case of OSB-wood joints, the minimum spacings (a_1 , a_2) can be multiplied by a coefficient of 0.85.

• In the case of Douglas fir elements (*Pseudotsuga menziesii*), the minimum distances parallel to the grain (a_1 , $a_{3,t}$, a_3) must be multiplied by a coefficient of 1.5.

SHEAR

TRACTION

geometry				wood-wood	panel-wood ⁽¹⁾	thread withdrawal ⁽²⁾	head penetration ⁽³⁾	
								
d ₁ [mm]	L [mm]	b [mm]	A [mm]	R _{v,k} [kN]	R _{v,k} [kN]	R _{ax,k} [kN]	R _{head,k} [kN]	
4	30	18	12	0,83	S _{PM} = 15 mm	0,81	0,97	1,16
	35	20	15	0,94		0,90	1,08	1,16
	40	24	16	0,98		0,94	1,30	1,16
	45	30	15	0,96		0,94	1,62	1,16
	50	30	20	1,08		0,94	1,62	1,16
4,5	20 ⁽⁴⁾	15	5	0,49	S _{PM} = 15 mm	0,49	0,91	1,48
	25 ⁽⁴⁾	20	5	0,49		0,80	1,22	1,48
	30 ⁽⁴⁾	25	5	0,49		0,89	1,52	1,48
	40	24	16	1,16		1,07	1,46	1,48
	45	30	15	1,14		1,07	1,83	1,48
	50	30	20	1,26		1,07	1,83	1,48
	60	35	25	1,40		1,07	2,13	1,48
5	70	40	30	1,41	S _{PM} = 15 mm	1,07	2,44	1,48
	40	24	16	1,32		1,21	1,62	1,83
	45	30	15	1,35		1,21	2,03	1,83
	50	30	20	1,46		1,21	2,03	1,83
	60	35	25	1,60		1,21	2,37	1,83
	70	40	30	1,69		1,21	2,71	1,83
	80	50	30	1,69		1,21	3,38	1,83
	90	55	35	1,69		1,21	3,72	1,83
6	100	60	40	1,69	S _{PM} = 15 mm	1,21	4,06	1,83
	70	40	30	2,25		1,57	3,25	2,66
	80	50	30	2,25		1,57	4,06	2,66
	90	55	35	2,41		1,57	4,47	2,66
	100	60	40	2,41		1,57	4,87	2,66
	120	75	45	2,41		1,57	6,09	2,66
	140	80	60	2,41		1,57	6,50	2,66
	160	90	70	2,41		1,57	7,31	2,66
	180	100	80	2,41		1,57	8,12	2,66
200	100	100	2,41	1,57	8,12	2,66		

GENERAL PRINCIPLES

- Characteristic values comply with EN 1995:2008, in accordance with ETA-11/0030.
- Design values are obtained from the following characteristic values:

$$R_d = \frac{R_k \cdot k_{mod}}{\gamma_m}$$

The coefficients γ_m and k_{mod} should be taken according to the current regulations used for the calculation.

- For the mechanical resistance values and the geometry of the screws, reference was made to ETA-11/0030.
- In the calculations, the density of the wood elements was considered equal to $\rho_k = 420 \text{ kg/m}^3$.
- Values were calculated considering the threaded part as being completely inserted into the wood.
- Sizing and verification of the wooden elements and panels must be done separately.
- The shear characteristic resistances are calculated for screws inserted without pre-bored holes. In the case of screws inserted with pre-bored holes, greater resistance values can be obtained.

NOTE

- ⁽¹⁾ The shear characteristic resistances are calculated considering an OSB panel or particle board with a S_{PM} thickness.
- ⁽²⁾ The axial thread-extraction resistance was calculated considering a 90° angle between the grain and the connector and for a fixing length of b.
- ⁽³⁾ The axial resistance to head penetration was calculated using wooden elements.
- ⁽⁴⁾ This screw has not been granted the CE mark.