

PROFID

SPACER PROFILE

VENTILATION


The square EPDM profile must be applied over the joists. Creates micro-ventilation under the boards and thus prevents water stagnation and ensures excellent patio durability.

STRENGTH

The EPDM guarantees excellent durability. With a density of over 1200 kg/m³, it guarantees high crushing resistance and is also ideal for high loads.



GEOMETRY

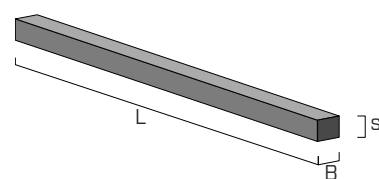

CODES AND DIMENSIONS

CODE	s [mm]	B [mm]	L [m]	density kg/m ³	shore	pcs
PROFID	8	8	40	1220	65	8

s: thickness | B: base | L: length



MATERIAL

EPDM.

FIELDS OF USE

Microventilation under the board.