

PLASTER BAND

SPECIAL HIGH-ADHESION TAPE,
CAN BE ALSO PLASTERED

EXCELLENT ADHESIVENESS

Its excellent adhesiveness makes it ideal for application on most surfaces, even at low temperatures.

CAN BE PLASTERED

Thanks to its special composition, it controls the flow of vapour perfectly and also guarantees a perfect airtightness.

COMPOSITION

support


breathable 2-layer PP membrane

adhesive

acrylic dispersion without solvents

release liner

silicone coated paper

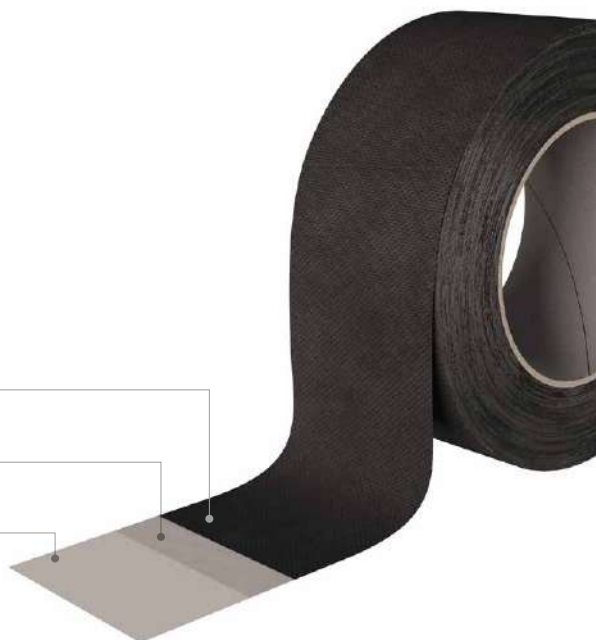

CODES AND DIMENSIONS

PLASTER BAND

CODE	liner [mm]	B [mm]	t [mm]	T [mm]	L [m]	liner [in]	B [in]	L [ft]	
1 PLASTER60	60	60	-	60	25	2.4	2.4	82	10

PLASTER BAND IN

CODE		liner	B	t	T	L	liner	B	L	
		[mm]	[mm]	[mm]	[mm]	[m]	[in]	[in]	[ft]	
2	PLASTIN1560	15 / 60	75	-	75	25	0.6 / 2.4	3.0	82	5
	PLASTIN1585	15 / 85	100	-	100	25	0.6 / 3.4	4.0	82	4
	PLASTIN15135	15 / 135	150	-	150	25	0.6 / 5.3	5.9	82	2
3	PLASTIN7520	75	75	20	75	25	3.0	3.0	82	5
	PLASTIN10020	100	100	20	100	25	3.9	3.9	82	4
	PLASTIN15020	150	150	20	150	25	5.9	5.9	82	2


PLASTER BAND OUT

CODE		liner	B	t	T	L	liner	B	L	
		[mm]	[mm]	[mm]	[mm]	[m]	[in]	[in]	[ft]	
2	PLASTOUT1560	15 / 60	75	-	75	25	0.6 / 2.4	3.0	82	5
	PLASTOUT1585	15 / 88	100	-	100	25	0.6 / 3.4	4.0	82	4
	PLASTOUT15135	15 / 135	150	-	150	25	0.6 / 5.3	5.9	82	2
	PLASTOUT15185	15 / 185	200	-	200	25	0.6 / 7.3	7.9	82	2
3	PLASTOUT7520	75	75	20	75	25	3.0	3.0	82	5
	PLASTOUT10020	100	100	20	100	25	3.9	3.9	82	4
	PLASTOUT15020	150	150	20	150	25	5.9	5.9	82	2
	PLASTOUT20020	200	200	20	200	25	7.9	7.9	82	2

■ FIELDS OF APPLICATION



■ RANGE

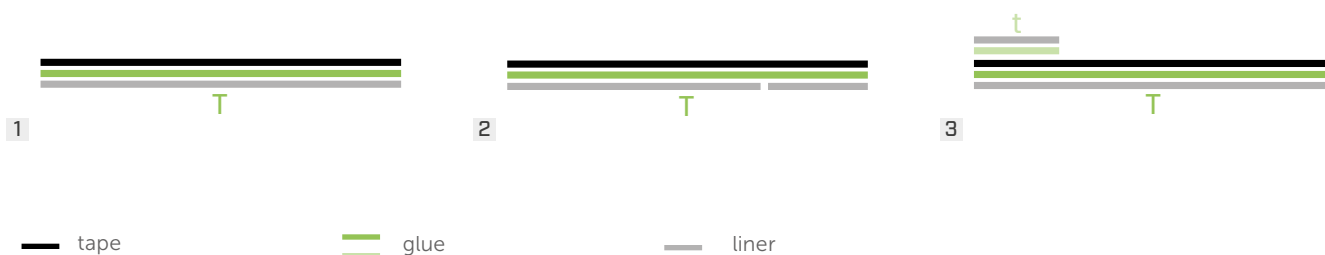

RESISTANT SEPARATION FILM

The PP liner allows the tape to be applied even in tight spaces and corners, avoiding the risk of the tape breaking when it is removed.

EASY INSTALLATION AND AESTHETIC PERFORMANCE

The pre-cut liner allows for precise and fast application with a high level of aesthetics and the possibility of perfectly concealing the tape behind claddings or plaster.

PLASTER BAND IN


COMPOSITION

- support
2-layer PP vapour control membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film



COMPOSITION

- support
2-layer PP vapour control membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film

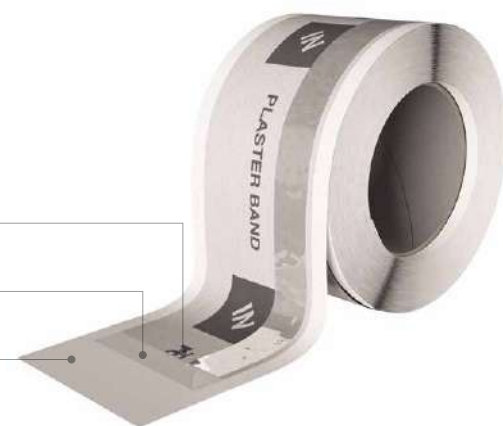

TECHNICAL DATA


Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,5 mm	20 mil
Mass per unit area	EN 1848-2	300 g/m ²	113.9 oz/ft ²
Water vapour transmission (Sd)	EN 1931	> 10 m	< 0.35 US perm
Maximum tensile force MD/CD	EN 12311-1	115 / 75 N/50 mm	13.13/8.57 lbf/in
Elongation MD/CD	EN 12311-1	75 / 80%	-
Watertightness	EN 13984	W1	-
Tightness in heavy rain	EN 1027	≥ 1050 Pa	-
Air permeability	EN 1026	≤ 0,1 m ³ /(h·m·(daPa) ^{2/3}	-
UV-resistant	-	3 months	-
Reaction to fire	EN 13501-1	class E	-
Application temperature	-	> +5 °C	> +41 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
Emicode	GEV test method	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location for no more than 24 months.
Waste classification (2014/955/EU): 08 04 10.

PLASTER BAND OUT


COMPOSITION

- support
breathable 2-layer PP membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film

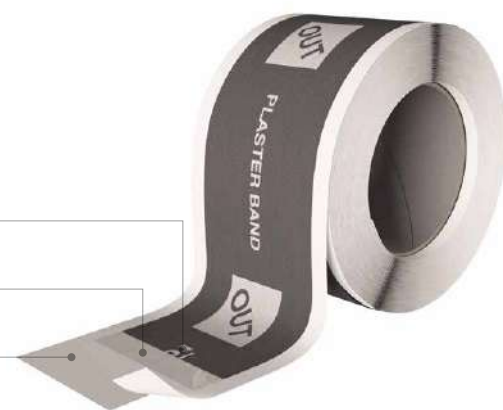

COMPOSITION

- support
breathable 2-layer PP membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film

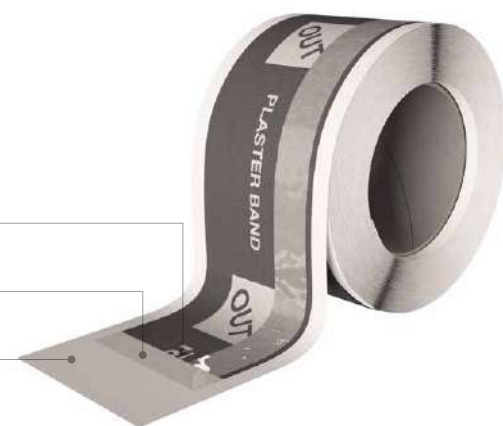


TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,7 mm	28 mil
Mass per unit area	EN 1848-2	360 g/m ²	-
Water vapour transmission (Sd)	EN 1931	< 1 m	> 3.5 US perm
Maximum tensile force MD/CD	EN 12311-1	290 / 190 N/50 mm	-
Elongation MD/CD	EN 12311-1	75 / 135%	-
Watertightness	EN 13984	W1	-
Tightness in heavy rain	EN 1027	≥ 1050 Pa	-
Air permeability	EN 1026	≤ 0,1 m ³ /(h·m·(daPa) ^{2/3}	-
UV-resistant	-	12 months	-
Reaction to fire	EN 13501-1	class E	-
Application temperature	-	> -10 °C	> +14 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
Emicode	GEV test method	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location for no more than 24 months.
Waste classification (2014/955/EU): 08 04 10.

RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN


APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

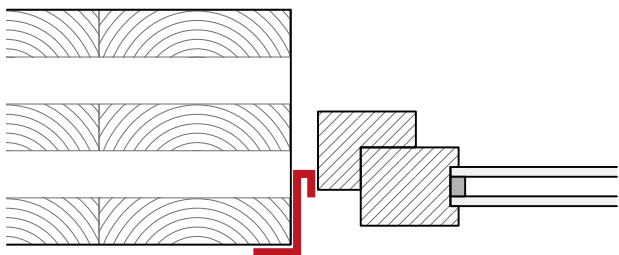

7 ROLLER


RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

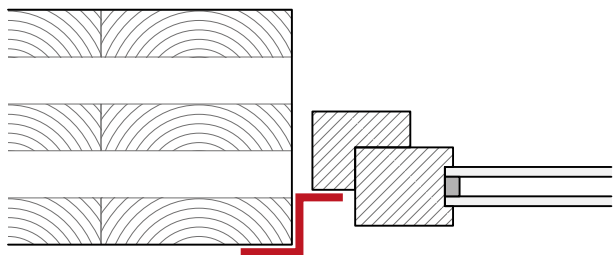

RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

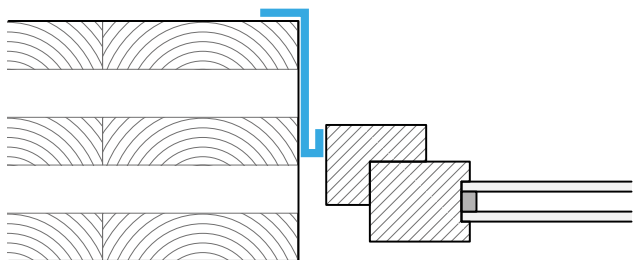

4 EXPAND BAND, WINDOW BAND, FRAME BAND

RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

