

VGU

45° washer for VGS

Bright zinc plated carbon steel



FIELD OF USE

Connections of timber elements with steel plates by means of full-threaded screws inclined at 45°

- solid timber
- glulam (Glued Laminated Timber)
- XLAM (Cross Laminated Timber)
- LVL (Laminated Veneer Lumber)
- wood-based panels

PACKAGING

Supplied in single pieces





PLATE ADAPTER

Allows to insert VGS screws at a 45° angle on plates without countersunk holes




EASE OF HANDLING

Anti-slip superficial knurling and cylindrical shape easy to handle



UNIVERSAL SIZE

Two sizes compatible with all 9mm and 11mm diameter VGS are available for plates of varying thickness





SAFETY

The washer is designed to ensure the screw insertion at precisely 45° to the plane and the connector feed in the correct direction



EASE OF HANDLING

The regular cylindrical shape of the diameter external to the countersink and the anti-slip knurling assure a firm grip during the assembling phase




AESTHETICS


The perfect matching between VGS head and the countersunk washer creates a compact and aesthetically pleasing joint finish.

CODES AND DIMENSIONS

VGU WASHER



VGS




code	screw	pcs/box
HUS945	VGS Ø9	1
HUS1145	VGS Ø11	1

Screws not included in the box

code	d ₁ [mm]	L [mm]	TX	pcs/box
VGS9160	9	160	TX40	25
VGS9200	9	200	TX40	25
VGS9240	9	240	TX40	25
VGS9280	9	280	TX40	25
VGS9320	9	320	TX40	25
VGS9360	9	360	TX40	25
VGS11100	11	100	TX50	25
VGS11150	11	150	TX50	25
VGS11200	11	200	TX50	25
VGS11250	11	250	TX50	25
VGS11300	11	300	TX50	25
VGS11350	11	350	TX50	25
VGS11400	11	400	TX50	25
VGS11450	11	450	TX50	25
VGS11500	11	500	TX50	25
VGS11550	11	550	TX50	25
VGS11600	11	600	TX50	25

EXTERNAL LAODS



MATERIAL AND DURABILITY


VGU: S235 bright zinc plated steel.
To be used in Service class 1 and 2 (EN 1995:2008).

FIELD OF USE

Steel to timber joints




GEOMETRY



WASHER		HUS945	HUS1145
VGS screw diameter	d ₁ [mm]	9,0	11,0
HInternal diameter	d [mm]	9,5	11,5
External diameter	D [mm]	18,0	22,0
Base length	L [mm]	34,8	42,1
Base heigth	h [mm]	3,0	3,6
Global heigth	H [mm]	20,5	24,8


INSTALLATION

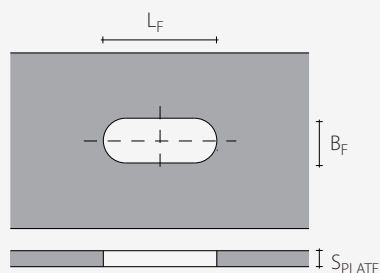

WASHER		HUS945	HUS1145
Slotted-hole length	L_F [mm]	min 35,0 max 36,0	min 43,0 max 44,0
Slotted-hole width	B_F [mm]	min 14,0 max 15,0	min 17,0 max 18,0
Steel plate thickness	S_{PLATE} [mm]	min 3,0 max 12,0*	min 4,0 max 15,0*




* For thicker plates it is necessary to realize a countersink in the lower part of the steel plate.

For VGS screw-lengths > 300 mm a Ø5 predrill is recommended.
The assembly must be performed so as to guarantee that the stress is evenly distributed among all the installed VGU washers.



STATIC VALUES - STEEL-TO-TIMBER JOINT

SLIDING RESISTANCE R_V

											
CHARACTERISTIC VALUES ⁽¹⁾ S _{PLATE} = 3 mm					ADMISSIBLE VALUES S _{PLATE} = 3 mm	CHARACTERISTIC VALUES ⁽¹⁾ S _{PLATE} = 12 mm					ADMISSIBLE VALUES S _{PLATE} = 12 mm
screw				TIMBER	STEEL				TIMBER	STEEL	
d ₁ [mm]	L [mm]	S _g [mm]	A _{MIN} [mm]	R _{V,k} [kN]	R _{tens,k 45°} [kN]	V _{adm 45°} [kg]	S _g [mm]	A _{MIN} [mm]	R _{V,k} [kN]	R _{tens,k 45°} [kN]	V _{adm 45°} [kg]
VGS 9	160	140	120	10,12	17,96	445	125	110	9,04	17,96	398
	200	180	145	13,01		573	165	135	11,93		525
	240	220	175	15,90		700	205	165	14,82		652
	280	260	205	18,80		827	245	195	17,71		780
	320	300	230	21,69		903	285	220	20,60		903
	360	340	260	24,58		903	325	250	23,50		903
S _{PLATE} = 4 mm					S _{PLATE} = 4 mm	S _{PLATE} = 15 mm					S _{PLATE} = 15 mm
VGS 11	100	80	75	7,07	26,87	311	65	60	5,74	26,87	253
	150	130	110	11,49		506	115	95	10,16		447
	200	180	145	15,90		700	165	130	14,58		642
	250	230	185	20,32		894	215	170	19,00		836
	300	280	220	24,74		1089	265	205	23,41		1031
	350	330	255	29,16		1130	315	240	27,83		1130
	400	380	290	33,58		1130	365	275	32,25		1130
	450	430	325	37,99		1130	415	310	36,67		1130
	500	480	360	42,41		1130	465	345	41,09		1130
	550	530	395	46,83		1130	515	380	45,50		1130
600	580	430	51,25	1130	565	415	49,92	1130			

GENERAL PRINCIPLES

- Characteristic values consistent with EN 1995:2008 and in accordance with ETA-11/0030.
- Admissible values are obtained according to DIN 1052:1988.
- For the calculation process a timber density of $\rho_k = 380 \text{ kg/m}^3$ has been considered.
- The fastener pull-out strength has been evaluated by considering a 45° angle to the grain and an effective length of the threaded part equal to S_g .

NOTES

- ⁽¹⁾ The design shear strength of the joint is the minimum among the timber design shear strength ($R_{V,d}$) and the steel design shear strength ($R_{tens,d 45^\circ}$).

$$R_{V,d} = \min \left\{ R_{V,k} \cdot \frac{k_{mod}}{\gamma_m}, \frac{R_{tens,k 45^\circ}}{\gamma_{m_2}} \right\}$$

For the correct realization of the joint, the fastener head should be fully embedded into the VGU washer. For intermediate values of S_{PLATE} linear interpolation is allowed. Dimensioning and verification of timber elements and steel plates shall be carried out separately.