

ANCHOR POINT FOR WORK AT HEIGHT AND IN SUSPENSION

ROBUST

Extremely robust and reliable.

VERSATILE

Can be used both for suspended work (1 person) and for protection against falls from height (3 people).

MULTIPURPOSE



With 2 versions in different materials, you will always find the right product for every environmental condition.




CODES AND DIMENSIONS

CODE	description	pcs
WING	S355J2 - painted with powder paint	1
WINGY	S355J2 - painted with powder paint (yellow)	1
WINGA4	1.4404 (A4)	1

The colour of the powder paint can be changed on request.

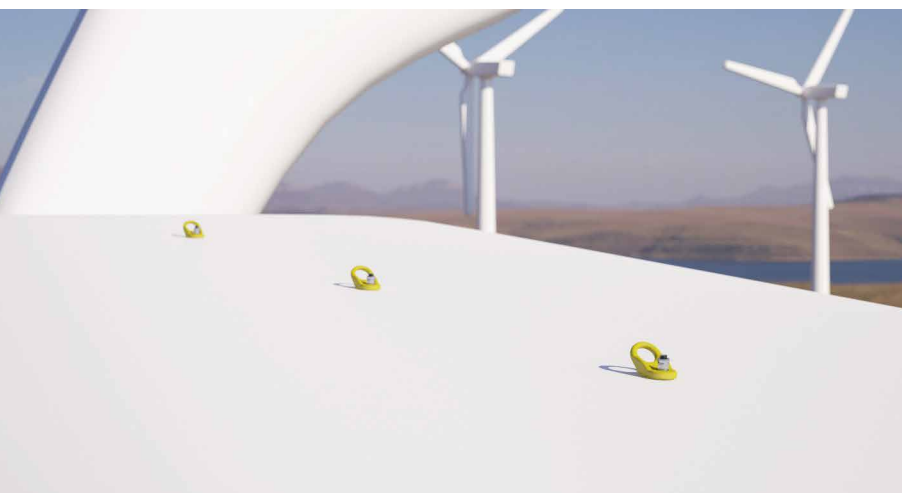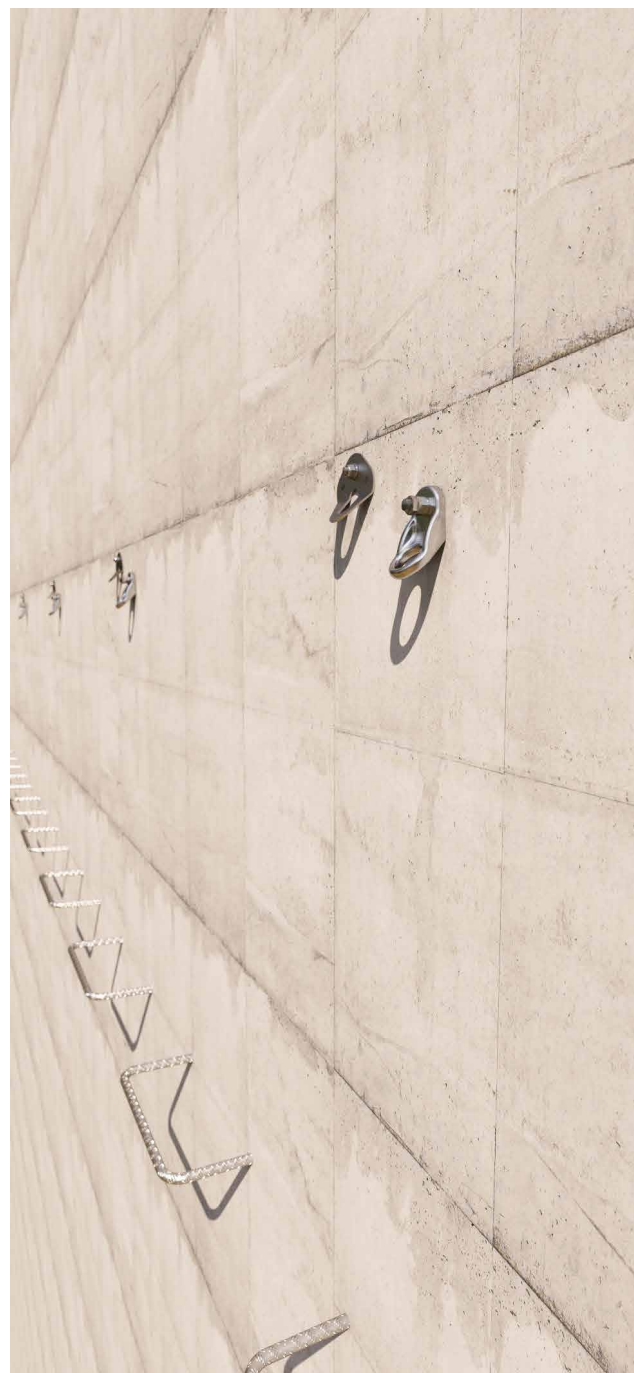


SURFACE INCLINATION

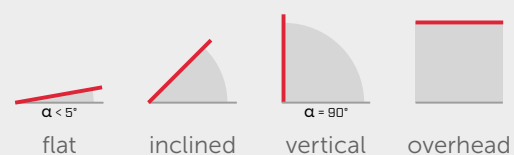

FIELD OF USE


Timber, concrete and steel structures as described in the installation manual.

GEOMETRY

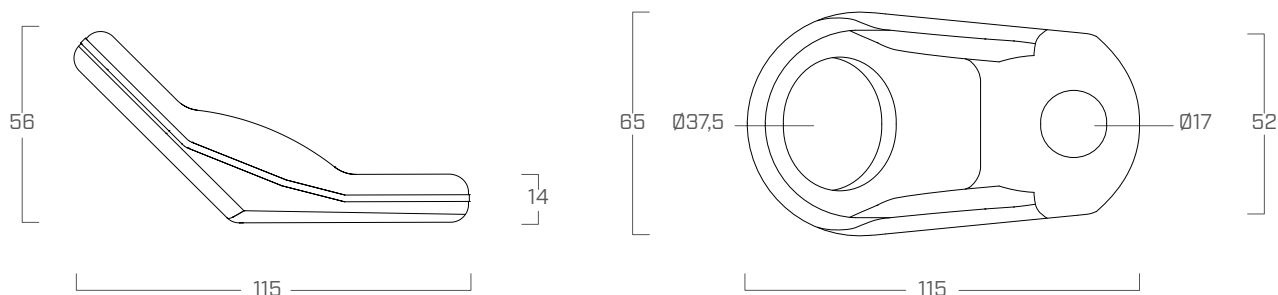


APPLICATION INSTRUCTIONS

STEEL SUBSTRUCTURE

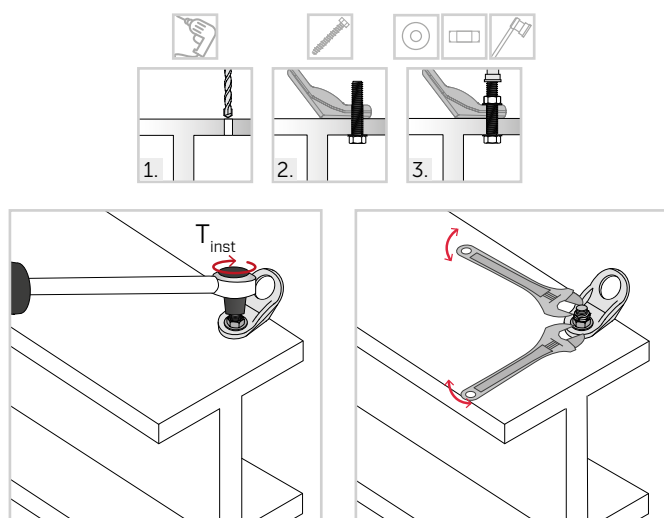

CONCRETE SUBSTRUCTURE

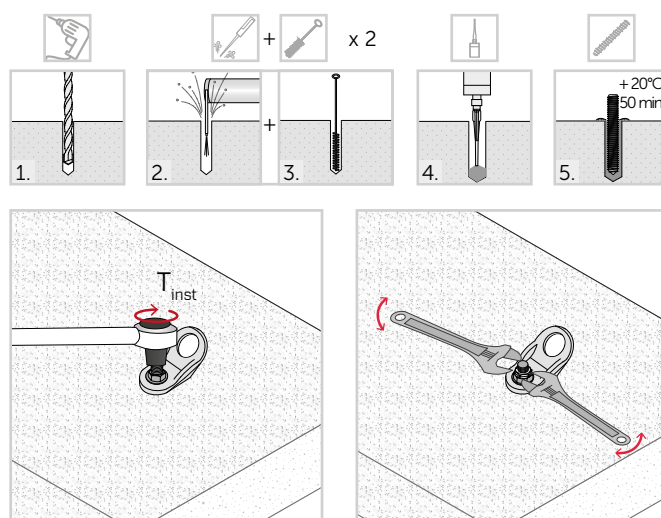

RELATED PRODUCTS

TYP	description	d ₁ [mm]
AB1	heavy anchor	16
AB1A4	stainless steel heavy anchor	16
SKRCE	CE screw anchor	16
VGS	screw for timber	11
VIN-FIX PRO	vinylester chemical anchor	-
XEPOX	epoxy resin	-

TECHNICAL SPECIFICATIONS

LABORATORY STRENGTHS

Data	standard	value
Q _s	EN 795:2012 CEN/TS 16415:2013	14 kN
Q _{d1}	EN 795:2012 CEN/TS 16415:2013	12 kN

