

TOWLATEVO

TOWER FOR INSTALLATION ON VERTICAL STRUCTURES

- It allows the construction of lifelines on a TOWER support, also mounted on a vertical structure
- It supports all the required forces for an anchor line, based on EN 795:2012 C




CODES AND DIMENSIONS

CODE	material	weight	B	H	L	pcs
		[kg]	[mm]	[mm]	[mm]	
TOWLATEVO	S235JR zinc plated steel	3,5	186	208	182	1

TOPLATE

COUNTERPLATE FOR TOWER

- Counterplate for TOWER and TOWER22 complete with nuts and washers

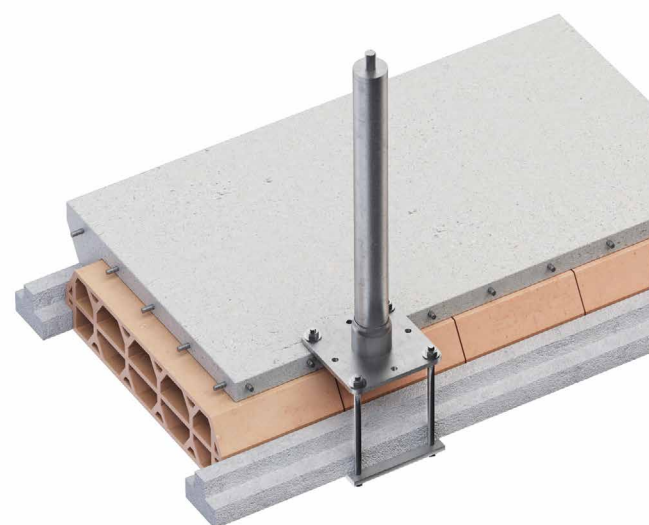

CODES AND DIMENSIONS

CODE	material	B	H	L	pcs
		[mm]	[mm]	[mm]	
TOPLATE	S235JR zinc plated steel	150	8	150	1

COMPLEMENTARY PRODUCTS

n.	CODE	description	Ø
			[mm]
4	MGS	threaded rod	12

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.