

SOLID BAND

ROBUST SINGLE-SIDED ADHESIVE TAPE SUITABLE FOR LOW TEMPERATURES

VERSATILE

It can be supplied with either a pre-cut or full liner, making it suitable for sealing concave or convex parts with great precision.

EXTREMELY STRONG

The special modified polymer carrier ensures high resistance to mechanical stress without deformation during use.

COMPOSITION

support
PP film

glue
acrylic dispersion without solvents

release liner
silicone coated paper



TECHNICAL DATA


Properties	standard	value	USC conversion
Thickness	-	0,24 mm	9.5 mil
Adhesion to OSB	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to steel	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to vinyl	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to plywood	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to its cladding material	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Elongation at failure	ASTM D 1000	≥ 400 %	-
Water vapour transmission (Sd)	-	> 18 m	< 0.19 US perm
UV-resistant	-	3 months	-
Tightness in heavy rain	-	conforming	-
Application temperature	-	-18 / +40 °C	-0.4 / +104 °F
Temperature resistance	-	-30 / +80 °C	-22 / +176 °F
Storage temperature	-	+5 / +30 °C	+41 / +86 °F

Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	liner [mm]	B [mm]	L [m]	liner [in]	B [in]	L [ft]	
SOLID60	60	60	25	2.4	2.4	82	10
SOLID3030	30 / 30	60	25	1.2 / 1.2	2.4	82	10

■ FIELDS OF APPLICATION

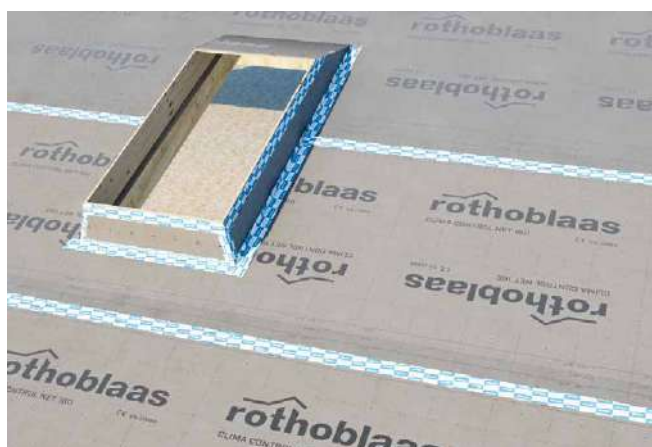

■ PRODUCT RANGE



SOLID60



SOLID3030



LOW TEMPERATURES -18°C

It has excellent adhesion at low temperatures without the need for primer or heating.

PRE-SHAPEABLE

The special mix of the support ensures high workability even in extremely harsh environmental conditions, allowing the pre-cut liner to be pre-bent and removed as desired.