


설치를 위한 권장사항



GUTTER

플래싱

- 냉한 및 내수성
- 자외선 저항
- 폴리에스테르 페인트를 포함한 보호 필름

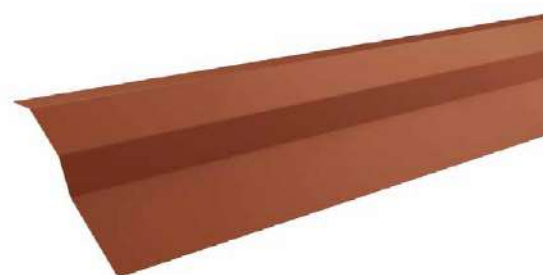

제품코드	B [mm]	L [m]	B [in]	L [ft]	자재	색상	RAL	
GUTRED80 ⁽¹⁾	80	2	3.1	7	알루미늄	붉은 벽돌색	8004	20
GUTBRO80 ⁽¹⁾	80	2	3.1	7	알루미늄	갈색	8019	20
GUTBLA80 ⁽¹⁾	80	2	3.1	7	알루미늄	검정	9005	20

⁽¹⁾선주문 필요.

폐기물 분류 (2014/955/EU): 17 04 02.



가변성

특수 접착식 부틸 혼합물은 거친 표면에서도 강한 밀착력을 제공합니다.

자재

알루미늄, EPDM 및 납은 내구성을 보장합니다.