

TOWER PEAK

INSTALLATION MANUAL



INCLUDED IN THE PACKAGE



GL24H



TOWER 300/400/500/600 + TOWER PEAK

EN
795:2012
A+C

CEN/TS
16415:2013

UNI
11578:2015
A+C

■ TOOLS




■ PRODUCT INFORMATION



TOWER 300/400/500/600 + TOWER PEAK




■ TOWER PEAK DIMENSIONS






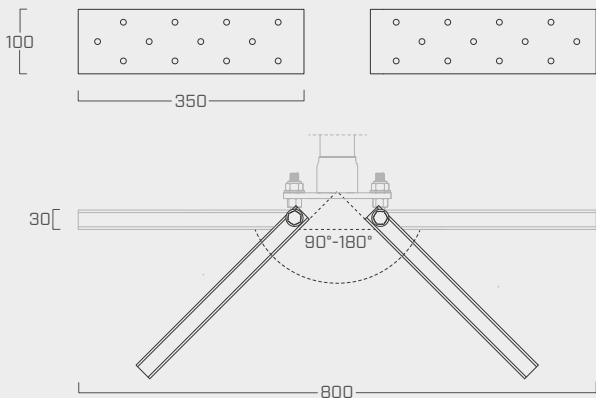


■ LOAD TEST MODEL TOWER 300/400/500/600 + TOWERPEAK

- IT** ⚠ Verificare idoneità statica del sottofondo di montaggio!
- DE** ⚠ Die statische Eignung des Montageuntergrundes sicherstellen!
- EN** ⚠ Check the static suitability of the installation substrate!
- ES** ⚠ ¡Compruebe la idoneidad estática del sustrato de montaje!
- FR** ⚠ Vérifier l'adéquation statique du substrat d'assemblage!

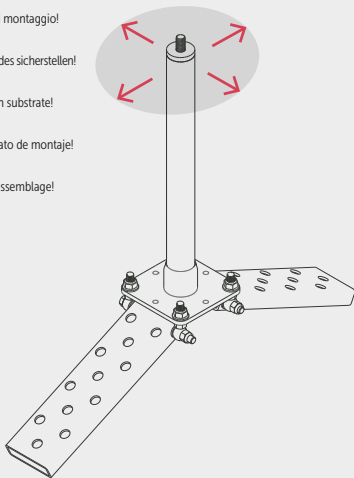

TOWER PEAK TOWER INSTALLATION



TOWER PEAK WOOD SUBSTRUCTURE



GL24H




19

x2





x24

HBS





1.

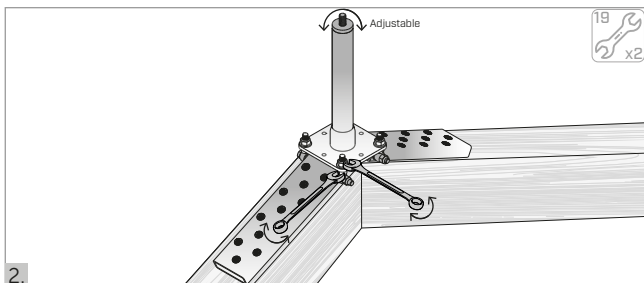

2.

HBS 8 x L mm



d_1	=	8 mm	h_1	≥	100 mm
b	≥	100 mm	$h_{pd,min}$	≥	80 mm
L	≥	120 mm	h_1	≥	$h_{pd,min}$


TOWER PEAK SUBSTRUCTURE WITH INSULATING PANEL




GL24H



HBS

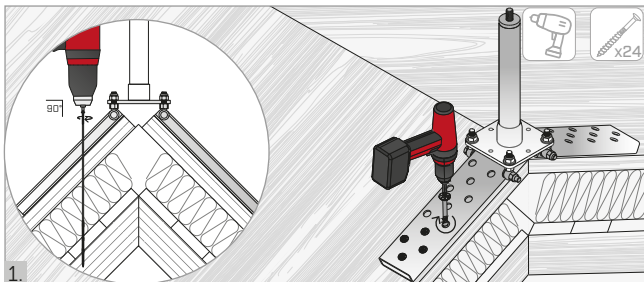


1.

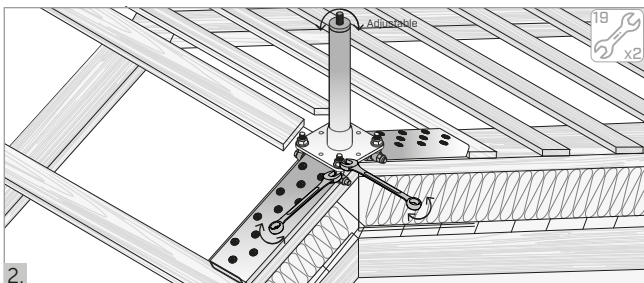


2.

HBS 8 x L mm



Beam profile min 100 x 100 mm



$$\begin{array}{l} d_1 = 8 \text{ mm} \\ h_1 \geq 100 \text{ mm} \end{array} \quad \left| \quad \begin{array}{l} h_{pd,min} \geq 80 \text{ mm} \end{array} \right.$$



Rotho Blaas Srl

03-23

Via dell'Adige N.2/1 | 39040, Cortaccia (BZ) | Italia
Tel: +39 0471 81 84 00 | Fax: +39 0471 81 84 84
info@rothoblaas.com | www.rothoblaas.com

