

LB HOLE CUTTER

FOR TIMBER AND TIMBER-LIKE MATERIALS

QUICK DRILLING

The new cutting edges and easy removal of the milled part will allow you to save valuable time.

POWERFUL

Drilling capacity up to 300 mm even in solid timber.

CODES AND DIMENSIONS

CODE	Ø cutter [mm]	EL [mm]	pcs
DULB42	42	300	1
DULB52	52	300	1
DULB62	62	300	1
DULB68	68	300	1
DULB72	72	300	1
DULB77	77	300	1
DULB82	82	300	1
DULB87	87	300	1
DULB92	92	300	1
DULB102	102	300	1
DULB112	112	300	1
DULB127	127	300	1
DULB132	132	300	1
DULB142	142	300	1
DULB152	152	300	1
DULB162	162	300	1
DULB172	172	300	1
DULB182	182	300	1
DULB202	202	300	1
DULB227	227	300	1
DULB250	250	300	1
DULB301	301	300	1
DULB322	322	300	1



DIA 303 machines recommended on page 213.



MATERIAL

High quality reliable HM cutters that can be sharpened and replaced so that it is not necessary to change the entire hole cutter.

FIELDS OF USE

Drilling of solid timber and glulam floors.
Drilling of wall and floor coverings.

CENTERING DRILL BIT

- Retractable - for LB hole cutter

CODE	description	EL	pcs
DUSZ	retractable bar for centering	250 - 300	1



CENTERING SHAFT

- Centering aid for large-sized holes

CODE	description	length [mm]	pcs
DUZST	for straight holes	385	1
DUZST6	for inclined holes	550	1



HOLE CUTTER ADAPTER

- For quick release change

CODE	description	pcs
DULSA1	for quick release change	1



ADAPTER FOR MACHINES

- For quick release change

CODE	description	pcs
DUSVM	adapter for machines	1



SHANK 1

- For cup cutters - with screw system

CODE	description	pcs
DULSA2	with screw system	1



SHANK 2

- For hole cutters -SDS

CODE	description	pcs
DULSA4	for SDS Max	1
DULSA5	for SDS Plus	1



SHANK 3


- For cup cutters - drill chuck with shank Ø13 mm

CODE	description	pcs
DULSA3	for drill chuck with shank Ø13 mm	1




LB HOLE CUTTER ADAPTERS

Threaded connection G 1/2" + quick-closing fastener



DUSVM




DULSA1

Threaded connection G 1/2"



DULSA2

Shank for Ø13 mm drill chucks



DULSA3

SDS Max connection



DULSA4

SDS Plus connection



DULSA5

Quick centring device




DUSZ

Centering shaft



DUZST / DUZST6

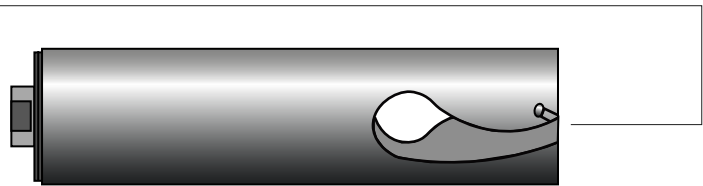

LB HOLE CUTTER

DULBXXX

RECOMMENDED OPERATION RANGE

cutters - Ø	rpm
[mm]	[U/min]
40 - 82	1400 - 700
83 - 142	700 - 400

cutters - Ø	rpm
[mm]	[U/min]
143 - 202	400 - 280
203 - 322	280 - 180