



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of 9
March 2011

MEMBER OF EOTA



European Technical Assessment ETA-23/0824 of 2023/11/21

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the construction product:

Rotho Blaas ALUMEGA connectors

Product family to which the above construction product belongs:

Three-dimensional nailing plate (Joist bearings)

Manufacturer:

ROTHO BLAAS s.r.l.
Via dell'Adige 2/1
IT-39040 Cortaccia (BZ)
Tel. + 39 0471 818400
Internet www.rothoblaas.com

Manufacturing plant:

ROTHO BLAAS s.r.l.
Manufacturing Plants: 1A, 2A and 3A

This European Technical Assessment contains:

34 pages including 3 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

EAD 130186-00-0603 for Three-dimensional nailing plates

This version replaces:

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product

Rotho Blaas ALUMEGA connectors are two-piece, face-fixed joist bearings to be used in timber to timber or timber to concrete or steel connections.

ALUMEGA connectors are made from aluminium alloy EN AW-6082 T6 according to EN 573-3:2009. Dimensions, hole positions and typical installations are shown in Annexes A and C.

2 Specification of the intended use in accordance with the applicable European Assessment document (hereinafter EAD)

ALUMEGA connectors are intended for use in making end-grain to side-grain connections in load bearing timber structures, as a connection between a wood based joist and a solid timber or wood based header or column as well as connections between a timber joist and a concrete structure or a steel member, where requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 of Regulation (EU) 305/2011 shall be fulfilled.

ALUMEGA connectors can be installed as connections between wood-based members such as:


- Structural solid timber according to EN 14081,
- Glued solid timber according to EN 14080
- Glulam according to EN 14080 or ETA,
- Cross-laminated timber according to ETA,
- LVL according to EN 14374 or ETA,
- FST according to ETA-14/0354,
- Engineered wood products with certified mechanical resistances for connections with dowel-type fasteners.

However, the calculation methods are only allowed for a characteristic wood density of up to 460 kg/m³ for softwood and up to 730 kg/m³ for LVL or hardwood. Even though the wood-based material may have a larger density, this must not be used in the formulas for the load-carrying capacities of the fasteners.

Annex B states the formulas for the characteristic load-carrying capacities of the connections with ALUMEGA

connectors. The design of the connections shall be in accordance with Eurocode 5 or a similar national Timber Code.

It is assumed that the forces acting on the ALUMEGA connector are F_1 or F_2 or F_3 perpendicular to the header axis and F_{45} perpendicular to the ALUMEGA connector axis. The forces F_2 and F_3 shall act in the symmetry plane of the joist bearing. It is assumed that the forces F_2 , F_3 or F_{45} are acting with an eccentricity e with regard to the side grain surface of the header.

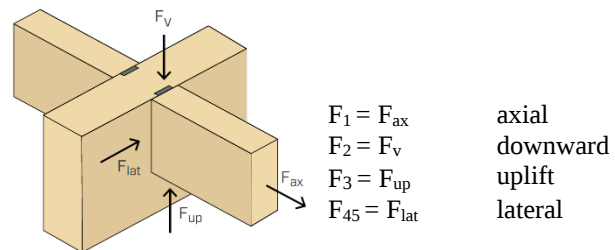

It is assumed that the header beam is prevented from rotating. If the header beam only has installed a joist bearing on one side the eccentricity moment $M_v = F_d \cdot (B_H / 2 + e)$ shall be considered. The same applies when the header has joist bearing connections on both sides, but with vertical forces which differ more than 20%.

ALUMEGA connectors are intended for use for connections subject to static or quasi static loading.

The ALUMEGA connectors are for use in timber structures subject to the conditions defined by the service classes 1, 2 and 3 of EN 1995-1-1:2014 (Eurocode 5).

The scope of the connectors regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions and in conjunction with the admissible service conditions according to EN 1995-1-1 and the admissible corrosivity category as described and defined in EN ISO 12944-2.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the joist bearings of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
3.1 Mechanical resistance and stability (BWR 1)*)	
Joint Strength - Characteristic load-carrying capacity	See Annex B
Joint Stiffness	See Annex B
Joint ductility	No performance assessed
Resistance to seismic actions	No performance assessed
Resistance to corrosion and deterioration	See section 3.6
3.2 Safety in case of fire (BWR 2)	
Reaction to fire	The ALUMEGA connectors are made from aluminium classified as Euroclass A1 in accordance with EN 13501-1 and Commission Delegated Regulation 2016/364
Resistance to fire	No performance assessed
3.3 General aspects related to the performance of the product	The connectors have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service classes 1, 2 and 3

*) See additional information in section 3.4 – 3.7

3.4 Methods of verification

Safety principles and partial factors

The characteristic load-carrying capacities are based on the characteristic values of the fasteners and the aluminium plates. To obtain design values the capacities must be divided by different partial factors for the material properties, in case of timber failure in addition multiplied with the coefficient k_{mod} .

According to EN 1990 (Eurocode – Basis of design) paragraph 6.3.5 the design value of load-carrying capacity may be determined by reducing the characteristic values of the load-carrying capacity with different partial factors.

Thus, the characteristic values of the load-carrying capacity are determined also for timber failure $F_{Rk,H}$ (obtaining the embedment strength of fasteners subjected to shear or the withdrawal capacity of the most loaded fastener, respectively) as well as for aluminium plate failure $F_{Rk,alu}$. The design value of the load-carrying capacity is the smaller value of both load-carrying capacities.

$$F_{Rd} = \min \left\{ \frac{k_{mod} \cdot F_{Rk,H}}{\gamma_{M,H}}, \frac{F_{Rk,alu}}{\gamma_{M,alu}} \right\}$$

Therefore, for timber failure the load duration class and the service class are included. The different partial factors γ_M for aluminium or timber, respectively, are also correctly considered.

3.5 Mechanical resistance and stability

See annex B for characteristic load-carrying capacities of the joist bearings.

The characteristic capacities of the joist bearings are determined by calculation assisted by testing as described in the EAD 130186-00-0603 clause 2.2.1. They should be used for designs in accordance with Eurocode 5 or a similar national Timber Code.

The design models allow the use of fasteners described in the table on page 12 in Annex A:

- *Self-tapping screws in accordance with ETA-11/0030*
- *Bolts or dowels in accordance with EN 14592*
- *Metal anchors in accordance with an ETA*

In the formulas in Annex B the capacities for screws calculated from the formulas of Eurocode 5 are used assuming a thick steel plate when calculating the lateral fastener load-carrying-capacity.

No performance has been assessed in relation to ductility of a joint under cyclic testing. The contribution to the performance of structures in seismic zones, therefore, has not been assessed.

3.6 Aspects related to the performance of the product

3.6.1 Corrosion protection in service class 1, 2 and 3.

In accordance with EAD 130186-00-0603 the ALUMEGA connectors are made from aluminium alloy EN AW-6082 T6 according to EN 573-3:2009 and could be either anodized or coated with an organic coating.

3.7 General aspects related to the use of the product

Rotho Blaas ALUMEGA connectors are manufactured in accordance with the provisions of this European Technical Assessment using the manufacturing processes as identified in the inspection of the plant by the notified inspection body and laid down in the technical documentation.

ALUMEGA connections

An ALUMEGA connection is deemed fit for its intended use provided:

Header – support conditions

- The header shall be restrained against rotation and be free from wane under the connector.

If the header carries joists only on one side the eccentricity moment from the joists $M_{ec} = R_{joist} (b_{header}/2 + 33 \text{ mm})$ shall be considered for ALUMEGA connectors at the strength verification of the header.

R_{joist}	Reaction force from the joists
b_{header}	Width of header

- For a header with joists from both sides but with different reaction forces a similar consideration applies.

Wood to wood connections

- Joist bearings are fastened to wood-based headers by bolts or screws and to wood-based joists by dowels or screws.
- There shall be bolts or screws and dowels in all holes (full fastener pattern) or in a part of the holes (partial fastener pattern).

- The characteristic capacity of the ALUMEGA connection is calculated according to the manufacturer's technical documentation, dated 2023-09-02.
- The ALUMEGA connection is designed in accordance with Eurocode 5 or an appropriate national code.
- The gap between the end of the joist and the surface, where contact stresses can occur during loading shall be limited. This means that for ALUMEGA connectors the gap between the surface of the flaps and the end of the joist shall be maximum 1 mm.
- The groove in the joist and the surface of the header shall have a plane surface against the whole ALUMEGA connector.
- The depth of the joist shall be so large that the top (bottom) of the joist is at least $a_{4,t}$ above (below) the upper (lower) dowel in the joist.
- Screws to be used shall have a diameter and head shape, which fits the holes of the ALUMEGA connector.

Wood to concrete or steel

The above-mentioned rules for wood-to-wood connections are applicable also for the connection between the joist and the ALUMEGA connector.

- The ALUMEGA connection is designed in accordance with Eurocodes 2, 3, 5 or 9 or an appropriate national code.
- The ALUMEGA connector shall be in close contact with the concrete or steel over the whole face. There shall be no intermediate layers in between.
- The gap between the end of the joist and the surface, where contact stresses can occur during loading shall be limited. This means that the gap between the end grain surface of the joist and that of the concrete or steel shall be maximum 1 mm.
- The bolt or metal anchor shall have a diameter not less than the hole diameter minus 2 mm.
- The bolts or metal anchors shall be placed symmetrically about the vertical symmetry line. There shall always be bolts in the 2 upper holes.
- The upper bolts shall have washers according to EN ISO 7094.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base

4.1 AVCP system

According to the decision 97/638/EC of the European Commission, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 2+.

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking.

Issued in Copenhagen on 2023-11-21 by




Thomas Bruun
Managing Director, ETA-Danmark

Annex A

Product details and definitions

ALUMEGA connector HV

Face mount hanger with flanges with pre-punched holes. 8.0 mm and 9.0 mm thick aluminium alloy EN AW 6082 T6 according to EN 573-3:2009.

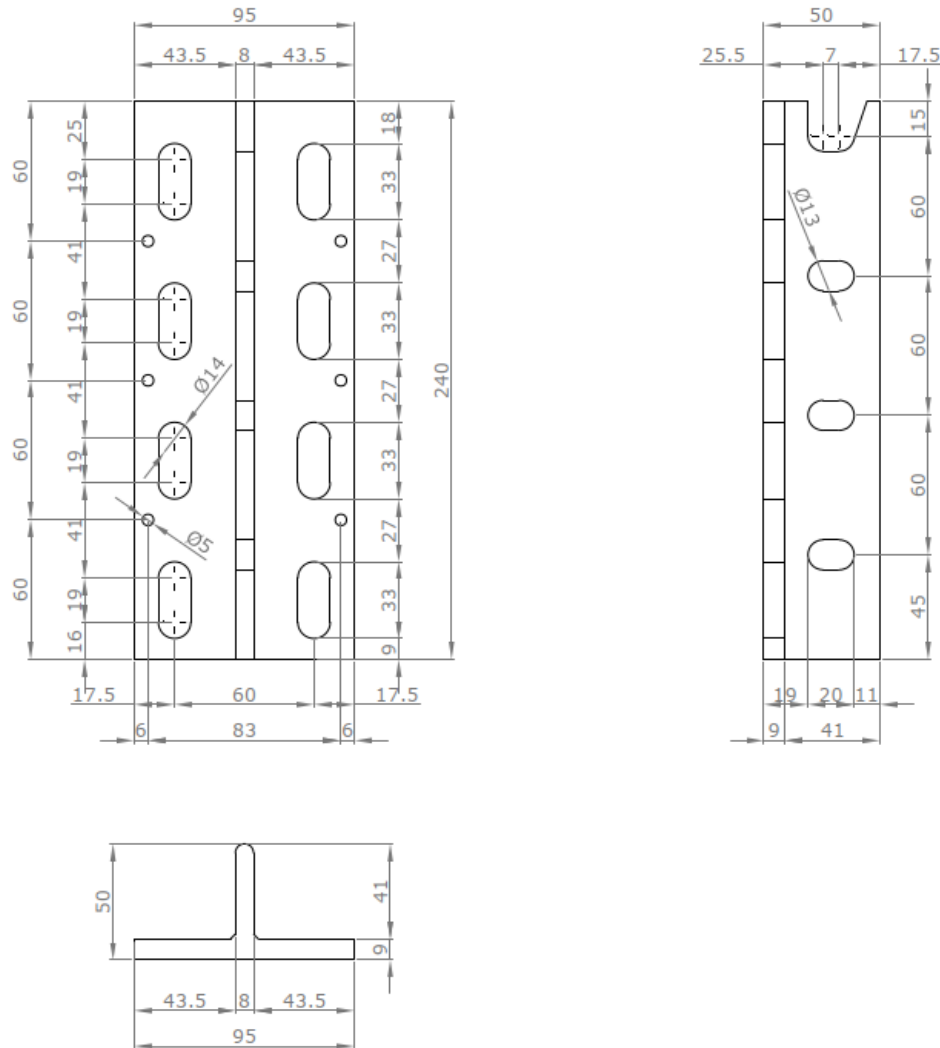


Drawing: ALUMEGA 240 HV

ALUMEGA	N° of oblong screw holes		N° of oblong bolt holes		N° of screw holes	
	N°	d	N°	d	N°	d
840	28	14 x 33	14	13 x 20	26	5
780	26	14 x 33	13	13 x 20	24	5
720	24	14 x 33	12	13 x 20	22	5
660	22	14 x 33	11	13 x 20	20	5
600	20	14 x 33	10	13 x 20	18	5
540	18	14 x 33	9	13 x 20	16	5
480	16	14 x 33	8	13 x 20	14	5
420	14	14 x 33	7	13 x 20	12	5
360	12	14 x 33	6	13 x 20	10	5
300	10	14 x 33	5	13 x 20	8	5
240	8	14 x 33	4	13 x 20	6	5

The ALUMEGA HV are also supplied in lengths of any multiple of 60 mm, with a minimum length of 240 mm. For the load-carrying capacity of an ALUMEGA with intermediate size, refer to the next smaller tabulated size.

ALUMEGA connector HP

Face mount hanger with flanges with pre-punched holes. 8.0 mm and 9.0 mm thick aluminium alloy EN AW 6082 T6 according to EN 573-3:2009.

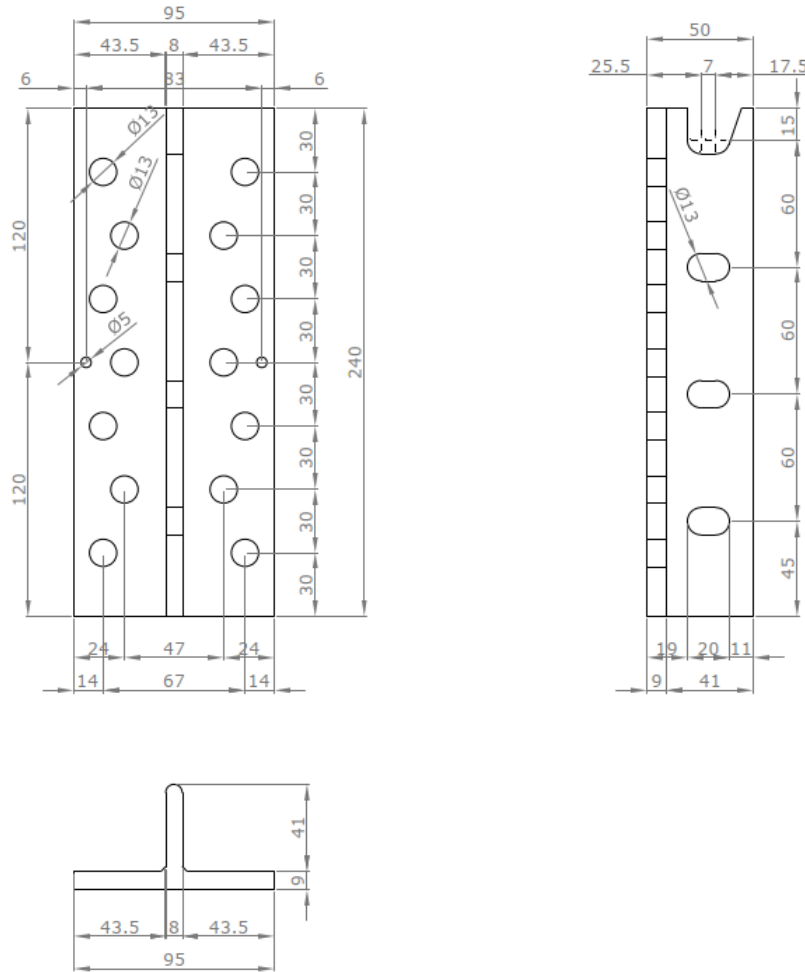


Drawing: ALUMEGA 240 HP

ALUMEGA	N° of screw holes		N° of oblong bolt holes		N° of screw holes	
	N°	d	N°	d	N°	d
840	54	13	14	13 x 20	12	5
780	50	13	13	13 x 20	12	5
720	46	13	12	13 x 20	10	5
660	42	13	11	13 x 20	10	5
600	38	13	10	13 x 20	8	5
540	34	13	9	13 x 20	8	5
480	30	13	8	13 x 20	6	5
420	26	13	7	13 x 20	6	5
360	22	13	6	13 x 20	4	5
300	18	13	5	13 x 20	4	5
240	14	13	4	13 x 20	2	5

The ALUMEGA HP are also supplied in lengths of any multiple of 60 mm, with a minimum length of 240 mm. For the load-carrying capacity of an ALUMEGA with intermediate size, refer to the next smaller tabulated size.

ALUMEGA connector JV

Face mount hanger with flanges with pre-punched holes. 8.0 mm and 6.0 mm thick aluminium alloy EN AW 6082 T6 according to EN 573-3:2009.

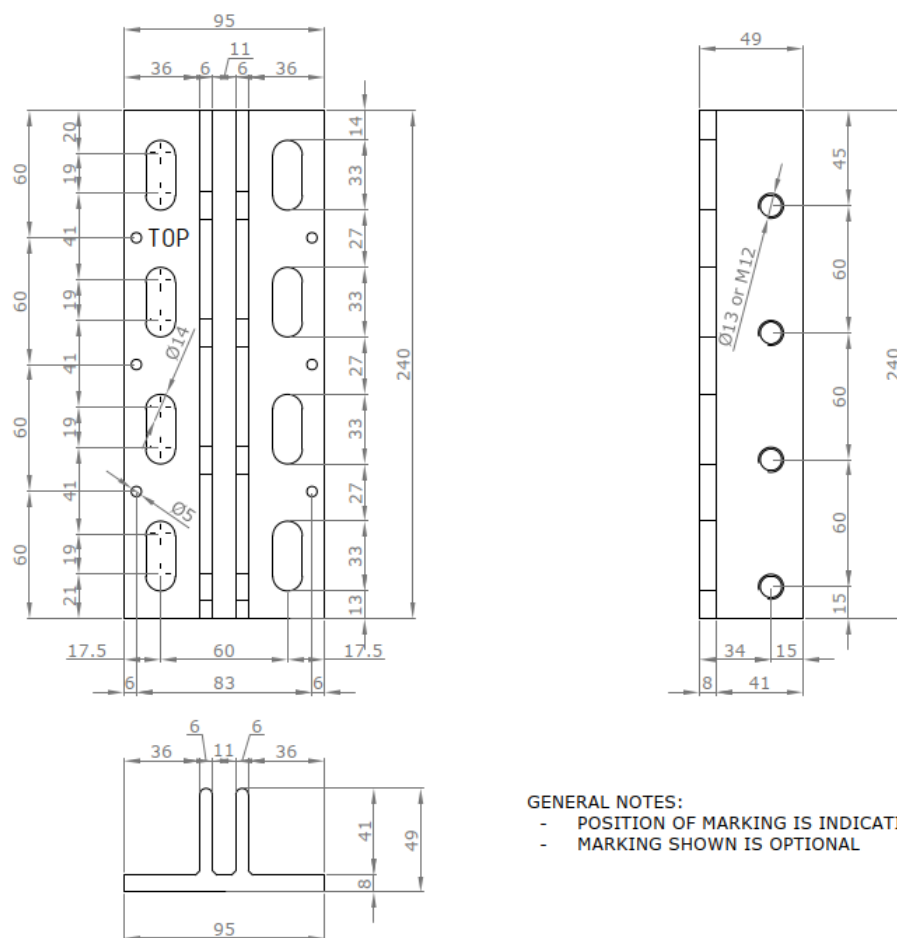

GENERAL NOTES:
 - POSITION OF MARKING IS INDICATIVE
 - MARKING SHOWN IS OPTIONAL


Drawing: ALUMEGA 240 JV.

ALUMEGA	N° of oblong screw holes		N° of bolt holes		N° of screw holes	
	N°	d	N°	d*	N°	d
840	28	14 x 33	14	M12	26	5
780	26	14 x 33	13	M12	24	5
720	24	14 x 33	12	M12	22	5
660	22	14 x 33	11	M12	20	5
600	20	14 x 33	10	M12	18	5
540	18	14 x 33	9	M12	16	5
480	16	14 x 33	8	M12	14	5
420	14	14 x 33	7	M12	12	5
360	12	14 x 33	6	M12	10	5
300	10	14 x 33	5	M12	8	5
240	8	14 x 33	4	M12	6	5

The ALUMEGA JV are also supplied in lengths of any multiple of 60 mm, with a minimum length of 240 mm. For the load-carrying capacity of an ALUMEGA with intermediate size, refer to the next smaller tabulated size. The M12 threaded holes may be enlarged to 13 mm diameter to enable the use of smooth shank bolts.

ALUMEGA connector JS

Face mount hanger with flanges with pre-punched holes. 8.0 mm and 6.0 mm thick aluminium alloy EN AW 6082 T6 according to EN 573-3:2009.

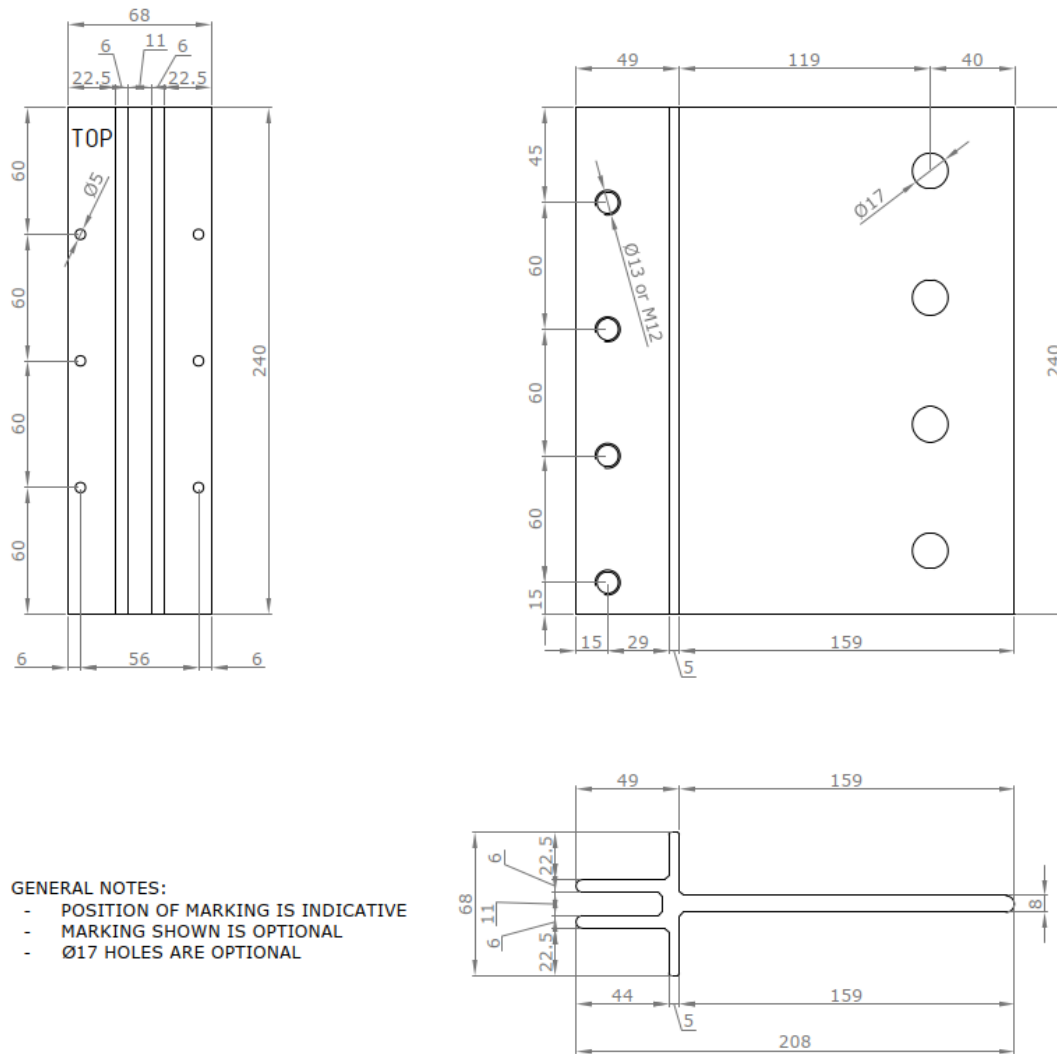

Drawing: ALUMEGA 240 JS

ALUMEGA	N° of dowel holes		N° of bolt holes		N° of screw holes	
	N°	d	N°	d	N°	d
840	14	17	14	M12	26	5
780	13	17	13	M12	24	5
720	12	17	12	M12	22	5
660	11	17	11	M12	20	5
600	10	17	10	M12	18	5
540	9	17	9	M12	16	5
480	8	17	8	M12	14	5
420	7	17	7	M12	12	5
360	6	17	6	M12	10	5
300	5	17	5	M12	8	5
240	4	17	4	M12	6	5

The ALUMEGA JS are also supplied in lengths of any multiple of 60 mm, with a minimum length of 240 mm. For the load-carrying capacity of an ALUMEGA with intermediate size, refer to the next smaller tabulated size. The M12 threaded holes may be enlarged to 13 mm diameter to enable the use of smooth shank bolts.

Fastener types and sizes

Screw diameter	Length	Screw type
5.0	40 – 70	LBS or LBSH screw according to ETA-11/0030, pre-drilled or non-pre-drilled
9.0	180 – 520	VGS screw according to ETA-11/0030, pre-drilled or non-pre-drilled
10.0	100 – 180	HBSP screw according to ETA-11/0030, pre-drilled or non-pre-drilled
In the formulas in Annex B the capacities for self-tapping screws calculated from the formulas of Eurocode 5 are used assuming a thick steel plate when calculating the lateral load-carrying-capacity. The characteristic axial capacity of the screws is determined by calculation: $F_{ax,\alpha,Rk} = \min \left\{ f_{tens,k}; \frac{n_{ef} \cdot k_{ax} \cdot f_{ax,k} \cdot d \cdot \ell_{ef}}{k_{\beta}} \left(\frac{\rho_k}{\rho_a} \right)^{0,8} \right\}$ Where: $f_{ax,k}$ Characteristic value of the withdrawal parameter in N/mm² d Screw diameter in mm ℓ_{ef} Penetration depth of the thread in mm, $\ell_{ef} = \ell - 9$ mm for LBS, LBSH or HBSP screws in ALUMEGA HV and HP, $\ell_{ef} = \ell - 8$ mm for LBS or LBSH screws in ALUMEGA JV, $\ell_{ef} = \ell - 28$ mm for VGS screws, $f_{ax,k}$, $f_{tens,k}$, ρ_a, k_{ax} and k_{β} see ETA-11/0030.		

BOLTS, METAL ANCHORS or DOWELS diameter	Corresponding hole diameter in aluminium plate	Fastener type
Bolt M12	13 mm	Bolt according to EN 14592
Bolt M12	M12	Bolts or threaded rods with metric thread min. 8.8 according to EN ISO 4762, EN ISO 10642, EN ISO 898, EN ISO 4014, EN ISO 4016, EN ISO 4017, EN ISO 4018, EN 15048 or ETA
SBD Dowel 7,5 mm	7,5 mm	Dowel according to EN 14592
STA Dowel 16 mm	17 mm	Dowel S355 according to EN 14592
Metal anchor 12 mm	13 mm	Metal anchors according to manufacturer's specification

Annex B

Characteristic values of load-carrying-capacities and stiffness

Two-piece ALUMEGA connectors consist of a header/column aluminium T-section HP or HV and a joist connector JV or JS. Header/column section and joist connector are joined with threaded 8.8 or greater metric steel bolts M12. The holes for the metric steel bolts in the header/column T-section have an oblong shape providing a hinge between header/column aluminium T-section and joist connector and an installation tolerance.

Header/column aluminium T-sections are HV or HP and joist connectors are JV or JS. HP is used with HBSP screws according to ETA-11/0030, bolts, or metal anchors. HV and JV are used with countersunk washers and inclined VGS screws according to ETA-11/0030 as fasteners and JS is used with bolts, STA, or SBD dowels according to EN 14592.

Possible combinations are HP+JV, HP+JS, HV+JV, and HV+JS. Combinations of T-sections and joist connectors with different depth are also possible. Up to three two-piece ALUMEGA connectors may be arranged side by side.

The downward and the upward directed forces are assumed to act in the middle of the joist.

Full or partial fastener patterns are foreseen. For header connections with bolts or metal anchors, there must always be at least bolts or metal anchors in the two upper two holes for loading down or in the two lower holes for loading up.

For ALUMEGA connectors arranged side-by-side, the load-carrying capacity of the connection is the sum of the load-carrying capacities of the ALUMEGA connectors.

B.1 Timber-to-timber connections

Tensile loading parallel to the joist axis

$$F_{1,HV,Rk} = \min \left\{ n_{45} \cdot 4,5 \text{ kN} \cdot \left(\frac{\rho_k}{350} \right)^{0,5} + 0,8 \cdot F_{2,Ed} ; F_{1,alu,Rk} ; F_{90,Rk} \right\} \quad (B.1)$$

$$F_{1,HP,Rk} = \min \left\{ 0,78 \cdot n_H^{0,9} \cdot F_{ax,Rk} ; 465 \cdot H_k ; F_{1,alu,Rk} ; F_{90,Rk} \right\} \text{ for full fastener pattern in N} \quad (B.2)$$

$$F_{1,HP,Rk} = \min \left\{ n_H^{0,9} \cdot F_{ax,Rk} ; 284 \cdot H_k ; F_{1,alu,Rk} ; F_{90,Rk} \right\} \text{ for partial fastener pattern in N} \quad (B.3)$$

$$F_{1,JV,Rk} = \min \left\{ n_{45} \cdot 3,5 \text{ kN} \cdot \left(\frac{\rho_k}{350} \right)^{0,5} + 0,8 \cdot F_{2,Ed} ; F_{1,alu,Rk} \right\} \quad (B.4)$$

$$F_{1,JS,Rk} = \min \left\{ n_{J,ef} \cdot \min (F_{v,J,Rk} ; F_{b,Rk}) ; F_{1,alu,Rk} \right\} \quad (B.5)$$

Where:

- n_{45} Number of inclined screws in the header or column for HV and in the joist for JV
- ρ_k Characteristic timber density in the header or column for HV and in the joist for JV
- $F_{2,Ed}$ Characteristic action of permanent downward force F_2 . The design value of the permanent action is determined by multiplying the characteristic value $F_{2,Ed}$ with $\gamma_{G,inf}$.
- $F_{1,alu,Rk}$ Characteristic load-carrying capacity of the bolted connection between HV or HP and JV or JS according to EN 1999-1-1, see Table B.1. $F_{1,alu,Rd} = F_{1,alu,Rk} / \gamma_{M2}$
- $F_{90,Rk}$ Characteristic load-carrying capacity according to EN 1995-1-1, 8.1.4. $F_{90,Rd} = k_{mod} \cdot F_{90,Rk} / \gamma_M$
- n_H Number of fasteners in the 13 mm holes of the header or column for HP
- $F_{ax,Rk}$ Characteristic withdrawal capacity of an axially loaded header or column fastener in the 13 mm holes for HP according to EN 1995-1-1 and ETA-11/0030, $F_{ax,Rd} = k_{mod} \cdot F_{ax,Rk} / \gamma_M$
- H_k ALUMEGA connector depth in mm, $H_d = H_k / \gamma_{M2}$

- $n_{J,ef}$ Effective number of 7,5 mm or 16 mm joist bolts or dowels according to EN 1995-1-1 in JS
- $F_{v,J,Rk}$ Characteristic lateral load-carrying capacity of a 7,5 mm or 16 mm bolt or dowel with two shear planes in the joist according to EN 1995-1-1, $F_{v,J,Rd} = k_{mod} \cdot F_{v,J,Rk} / \gamma_M$

Table B.1: Rotho Blaas ALUMEGA connectors: Load-carrying capacity $F_{1,alu,Rk}$, $F_{2,alu,Rk}$, $F_{3,alu,Rk}$ and $F_{45,alu,Rk}$

ALUMEGA	$F_{1,alu,Rk}$ [kN]		$F_{2,alu,Rk}$ [kN]		$F_{3,alu,Rk}$ [kN]		$F_{45,alu,Rk}$ [kN]
	Total	Per bolt	Total	Per bolt	Total	Per bolt	Total
840	434	33,4	679	48,5	630	48,5	118
780	401	33,4	630	48,5	581	48,4	110
720	367	33,4	581	48,4	532	48,3	101
660	334	33,4	532	48,3	483	48,3	92,9
600	300	33,4	483	48,3	433	48,2	84,4
540	267	33,4	433	48,2	384	48,0	76,0
480	234	33,4	384	48,0	335	47,9	67,5
420	200	33,4	335	47,9	286	47,7	59,1
360	167	33,4	286	47,7	237	47,4	50,7
300	134	33,4	237	47,4	188	47,0	42,2
240	100	33,4	188	47,0	139	46,3	33,8

Loading down:

$$F_{2,HV,Rk} = \min \{ k_2 \cdot n_{45} \cdot F_{ax,\alpha,Rk}; k_2 \cdot n_{45} \cdot f_{tens,k}; F_{2,alu,Rk} \} \quad (B.6)$$

$$F_{2,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_H \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{1}{k_{H,2} \cdot F_{ax,H,Rk}} \right)^2}}; F_{2,alu,Rk} \right\} \text{ for headers} \quad (B.7)$$

$$F_{2,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_{H,ef} \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{1}{k_{H,2} \cdot F_{ax,H,Rk}} \right)^2}}; F_{2,alu,Rk} \right\} \text{ for columns} \quad (B.8)$$

$$F_{2,JV,Rk} = \min \{ k_2 \cdot n_{45} \cdot F_{ax,\alpha,Rk}; k_2 \cdot n_{45} \cdot f_{tens,k}; F_{2,alu,Rk} \} \quad (B.9)$$

$$F_{2,JS,Rk} = \min \{ n_{J,ef} \cdot \min (F_{v,J,Rk}; F_{b,Rk}); F_{2,alu,Rk} \} \quad (B.10)$$

Where:

- k_2 Parameter. $k_2 = 0,88$ for ALUMEGA 240; $k_2 = 0,8$ for all other ALUMEGA sizes
- n_{45} Number of inclined screws in the header or column for HV and in the joist for JV
- $F_{ax,\alpha,Rk}$ Characteristic withdrawal capacity of an axially loaded VGS screw for HV or JV according to EN 1995-1-1 and ETA-11/0030, $F_{ax,\alpha,Rd} = k_{mod} \cdot F_{ax,\alpha,Rk} / \gamma_M$
- $f_{tens,k}$ Characteristic tensile capacity of an axially loaded VGS screw for HV or JV according to ETA-11/0030, $F_{ax,\alpha,Rd} = f_{tens,k} / \gamma_M$
- $F_{2,alu,Rk}$ Characteristic load-carrying capacity of the bolted connection between HV or HP and JV or JS according to EN 1999-1-1, see Table B.1. $F_{2,alu,Rd} = F_{2,alu,Rk} / \gamma_{M2}$

- n_H Number of fasteners in the 13 mm holes of the header or column for HP
- $F_{v,H,Rk}$ Characteristic lateral load-carrying capacity of a fastener in single shear in the 13 mm holes for HP in the header or column according to EN 1995-1-1 and ETA-11/0030 assuming a thick plate,
 $F_{v,H,Rd} = k_{mod} \cdot F_{v,H,Rk} / \gamma_M$
- $k_{H,2}$ form factor, see Table B.2
- $F_{ax,H,Rk}$ Characteristic withdrawal capacity of an axially loaded header or column fastener in the 13 mm holes for HP according to EN 1995-1-1 and ETA-11/0030, $F_{ax,H,Rd} = k_{mod} \cdot F_{ax,H,Rk} / \gamma_M$
- $n_{H,ef}$ effective number of laterally loaded fasteners in the 13 mm holes for HP on columns
 For full pattern and 10 mm HBSP screws: $n_{H,ef} = 2 \cdot (0,5 \cdot n_{H,full})^{0,9}$
 For partial pattern and 10 mm HBSP screws: $n_{H,ef} = 2 \cdot (0,5 \cdot n_{H,partial})^{0,95}$
 For partial pattern and 12 mm bolts: $n_{H,ef} = 1,58 \cdot (0,5 \cdot n_{H,partial})^{0,9}$
- $n_{J,ef}$ effective number of laterally loaded bolts or STA or SBD dowels in double shear for JS in the joist, see Table B.2. Other SBD dowel patterns are determined according to the manufacturer's technical documentation dated 02-09-23.
- $F_{v,J,Rk}$ Characteristic lateral load-carrying capacity of a bolt or STA or SBD dowel with two shear planes in the joist according to EN 1995-1-1, for loading under an angle α between load and grain direction, $F_{v,J,Rd} = k_{mod} \cdot F_{v,J,Rk} / \gamma_M$.
- α Load grain angle for the configurations shown in Annex C pages 21 and 24.
 $\alpha = 25,7 \cdot \ln(L_{ALUMEGA}) - 110$ [°] for STA dowels
 $\alpha = 3,6 \cdot L_{ALUMEGA}^{0,43}$ [°] for SBD dowels
 For other patterns α is determined according to the manufacturer's technical documentation dated 02-09-23.
- $L_{ALUMEGA}$ Connector length in mm between 240 mm and 840 mm
- $F_{b,Rk}$ Characteristic embedment resistance of the joist plate according to EN 1999-1-1. $F_{b,Rd} = F_{b,Rk} / \gamma_{M2}$
 For joists consisting of CLT where the aluminium joist plate is arranged parallel to the plane of the CLT member, the embedment strength for CLT may be assumed as:

$$f_{h,k} = \frac{32 \cdot (1 - 0,015 \cdot d)}{1,1 \cdot \sin^2 \alpha + \cos^2 \alpha} \cdot \left(\frac{\rho_k}{400} \right)^{1,2} \text{ in N/mm}^2$$
- α Angle between the load direction and the grain direction of the CLT layer in contact with the joist plate
- The minimum spacing, end and edge distance requirements for dowels in CLT joists are:
 $a_1 = (3 + 2 \cos \alpha) \cdot d$ $a_2 = 3 \cdot d$
 $a_{3,t} = 5 \cdot d$ $a_{3,c} = 4 \cdot d$
 $a_{4,t} = 3 \cdot d$ $a_{4,c} = 3 \cdot d$

Table B.2: ALUMEGA HP connectors: Form factors $k_{H,2}$ and number of fasteners n_H
 ALUMEGA JS connectors: number of fasteners n_J and effective number of fasteners $n_{J,ef}$

ALUMEGA HP	n _{H,full}	k _{H,2}	n _{H,partial}	k _{H,2}	ALUMEGA JS	STA or bolt		SBD	
	Full pattern		Partial pattern			n _J	n _{J,ef}	n _J	n _{J,ef}
840	54	464	28	245	840	14	12,4	54	47,2
780	50	398	26	211	780	13	11,3	50	42,9
720	46	338	24	180	720	12	10,2	46	38,6
660	42	282	22	151	660	11	9,16	42	34,4
600	38	232	20	125	600	10	8,08	38	30,1
540	34	186	18	101	540	9	7,01	34	25,9
480	30	145	16	79,9	480	8	5,95	30	21,7
420	26	110	14	61,2	420	7	4,90	26	17,7
360	22	79,1	12	44,9	360	6	3,89	22	13,8
300	18	53,4	10	31,2	300	5	2,92	18	10,2
240	14	32,8	8	19,9	240	4	2,03	14	6,89

Loading up:

$$F_{3,HV,Rk} = \min \left\{ n_{45} \cdot 3,8 \text{ kN} \cdot \left(\frac{\rho_k}{350} \right)^{0,5} ; F_{3,alu,Rk} \right\} \quad (\text{B.11})$$

$$F_{3,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_H \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{1}{k_{H,2} \cdot F_{ax,H,Rk}} \right)^2}} ; F_{3,alu,Rk} \right\} \text{ for headers} \quad (\text{B.12})$$

$$F_{3,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_{H,ef} \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{1}{k_{H,2} \cdot F_{ax,H,Rk}} \right)^2}} ; F_{3,alu,Rk} \right\} \text{ for columns} \quad (\text{B.13})$$

$$F_{3,JV,Rk} = \min \left\{ n_{45} \cdot 2,1 \text{ kN} \cdot \left(\frac{\rho_k}{350} \right)^{0,5} ; F_{3,alu,Rk} \right\} \quad (\text{B.14})$$

$$F_{3,JS,Rk} = \min \left\{ n_{J,ef} \cdot \min(F_{v,J,Rk} ; F_{b,Rk}) ; F_{3,alu,Rk} \right\} \quad (\text{B.15})$$

Where:

- n_{45} Number of inclined screws in the header or column for HV and in the joist for JV
- ρ_k Characteristic timber density in the header or column for HV and in the joist for JV
- $F_{3,alu,Rk}$ Characteristic load-carrying capacity of the bolted connection between HV or HP and JV or JS according to EN 1999-1-1, see Table B.1. $F_{3,alu,Rd} = F_{3,alu,Rk} / \gamma_{M2}$
- n_H Number of fasteners in the 13 mm holes of the header or column for HP
- $F_{v,H,Rk}$ Characteristic lateral load-carrying capacity of a fastener in single shear in the 13 mm holes in the header or column for HP according to EN 1995-1-1 and ETA-11/0030 assuming a thick plate, $F_{v,H,Rd} = k_{mod} \cdot F_{v,H,Rk} / \gamma_M$
- $k_{H,2}$ form factor, see Table B.2
- $F_{ax,H,Rk}$ Characteristic load-carrying capacity of an axially loaded header or column fastener in the 13 mm holes for HP according to EN 1995-1-1 and ETA-11/0030, $F_{ax,H,Rd} = k_{mod} \cdot F_{ax,H,Rk} / \gamma_M$
- $n_{H,ef}$ effective number of laterally loaded fasteners in the 13 mm holes for HP in the column
For full pattern and 10 mm HBSP screws: $n_{H,ef} = 2 \cdot (0,5 \cdot n_{H,full})^{0,9}$
For partial pattern and 10 mm HBSP screws: $n_{H,ef} = 2 \cdot (0,5 \cdot n_{H,partial})^{0,95}$
For partial pattern and 12 mm bolts: $n_{H,ef} = 1,58 \cdot (0,5 \cdot n_{H,partial})^{0,9}$
- $n_{J,ef}$ effective number of laterally loaded bolts or STA or SBD dowels in double shear for JS in the joist, see Table B.2. Other SBD dowel patterns are determined according to the manufacturer's technical documentation dated 02-09-23.
- $F_{v,J,Rk}$ Characteristic lateral load-carrying capacity of a dowel with two shear planes in the joist according to EN 1995-1-1, for loading under an angle α between load and grain direction, $F_{v,J,Rd} = k_{mod} \cdot F_{v,J,Rk} / \gamma_M$
- α Load grain angle for the configurations shown in Annex C pages 21 and 24.
 $\alpha = 25,7 \cdot \ln(L_{ALUMEGA}) - 110$ [°] for STA dowels
 $\alpha = 3,6 \cdot L_{ALUMEGA}^{0,43}$ [°] for SBD dowels

For other patterns α is determined according to the manufacturer's technical documentation dated 02-09-23.

$L_{ALUMEGA}$ Connector length in mm between 240 mm and 840 mm

For joists consisting of CLT where the aluminium joist plate is arranged parallel to the plane of the CLT member, the embedment strength for CLT may be assumed as:

$$f_{h,k} = \frac{32 \cdot (1 - 0,015 \cdot d)}{1,1 \cdot \sin^2 \alpha + \cos^2 \alpha} \cdot \left(\frac{\rho_k}{400} \right)^{1,2} \text{ in N/mm}^2$$

α Angle between the load direction and the grain direction of the CLT layer in contact with the joist plate
The minimum spacing, end and edge distance requirements for dowels in CLT joists are:

$$\begin{aligned} a_1 &= (3 + 2 \cos \alpha) \cdot d & a_2 &= 3 \cdot d \\ a_{3,t} &= 5 \cdot d & a_{3,c} &= 4 \cdot d \\ a_{4,t} &= 3 \cdot d & a_{4,c} &= 3 \cdot d \end{aligned}$$

Loading perpendicular to the symmetry plane:

$$F_{45,HV,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_{45} \cdot F_{v,45,Rk}} \right)^2 + \left(\frac{1}{k_{H,45} \cdot F_{ax,45,Rk}} \right)^2}}; F_{45,alu,Rk} \right\} \quad (B.16)$$

$$F_{45,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_H \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{1}{k_{H,45} \cdot F_{ax,H,Rk}} \right)^2}}; F_{45,alu,Rk} \right\} \quad (B.17)$$

$$F_{45,JV,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_{45} \cdot F_{v,45,Rk}} \right)^2 + \left(\frac{1}{k_{H,45} \cdot F_{ax,45,Rk}} \right)^2}}; F_{45,alu,Rk} \right\} \quad (B.18)$$

$$F_{45,JS,Rk} = \min \left\{ \frac{k_v \cdot f_{v,k} \cdot h \cdot b}{3}; F_{45,alu,Rk} \right\} \quad (B.19)$$

Where:

n_{45} Number of inclined screws in the header or column for HV and in the joist for JV

$F_{v,45,Rk}$ Characteristic lateral load-carrying capacity of a VGS screw in single shear according to EN 1995-1-1 assuming a thick plate, $F_{v,45,Rd} = k_{mod} \cdot F_{v,45,Rk} / \gamma_M$

$$F_{v,Rk} = f_{h,k} \cdot d \cdot \left(\sqrt{t_{IL}^2 + \frac{4 \cdot M_{y,Rk}}{f_{h,k} \cdot d}} - t_{IL} \right)$$

$f_{h,k} = 0,082 \cdot \rho_k \cdot d^{-0,3}$ N/mm² for headers

$f_{h,k} = 0,047 \cdot \rho_k \cdot d^{-0,3}$ N/mm² for joists or columns

$d = 9$ mm

$t_{IL} = 12,7$ mm

$M_{y,Rk} = 27200$ Nmm

$k_{h,45}$ form factor, see Table B.3

$F_{ax,45,Rk}$ Characteristic load-carrying capacity of a VGS screw in load direction F_1 , $F_{ax,45,Rd} = k_{mod} \cdot F_{ax,45,Rk} / \gamma_M$

$$F_{ax,45,Rk} = 4,5 \text{ kN} \cdot \left(\frac{\rho_k}{350} \right)^{0,5} + \frac{0,8}{n_{45}} \cdot F_{2,Ed} \text{ for HV}$$

$$F_{ax,45,Rk} = 3,5 \text{ kN} \cdot \left(\frac{\rho_k}{350} \right)^{0,5} + \frac{0,8}{n_{45}} \cdot F_{2,Ed} \text{ for JV}$$

$F_{2,Ed}$ Characteristic action of permanent downward force F_2 . The design value of the permanent action is determined by multiplying the characteristic value $F_{2,Ed}$ with $\gamma_{G,inf}$.

$F_{45,alu,Rk}$ Characteristic load-carrying capacity of the bolted connection between HV or HP and JV or JS according to EN 1999-1-1, see Table B.1. $F_{45,alu,Rd} = F_{45,alu,Rk} / \gamma_{M2}$

n_H Number of fasteners in the 13 mm holes of the header or column for HP

$F_{v,H,Rk}$ Characteristic lateral load-carrying capacity of a fastener in single shear in the 13 mm holes in the header or column for HP according to EN 1995-1-1 and ETA-11/0030 assuming a thick plate, $F_{v,H,Rd} = k_{mod} \cdot F_{v,H,Rk} / \gamma_M$

$F_{ax,H,Rk}$ Characteristic withdrawal capacity of an axially loaded header or column fastener in the 13 mm holes for HP according to EN 1995-1-1 and ETA-11/0030, $F_{ax,H,Rd} = k_{mod} \cdot F_{ax,H,Rk} / \gamma_M$

$$k_v = \min \left\{ 1; \frac{k_n}{\sqrt{b} \cdot \left(0,5 + \frac{112}{b} \right)} \right\}$$

k_n Parameter according to Eurocode 5 equation (6.63)

b Joist width in mm

h Joist depth in mm

$f_{v,k}$ Characteristic joist shear strength [N/mm²] $f_{v,Rd} = k_{mod} \cdot f_{v,Rk} / \gamma_M$

Table B.3: ALUMEGA connectors: Form factors $k_{H,45}$ for full and partial pattern

ALUMEGA	$k_{H,45}$ full pattern			$k_{H,45}$ partial pattern		
	HV	JV	HP	HV	JV	HP
840	26,3	24,7	49,6	24,4	22,9	29,4
780	24,4	22,9	46,0	22,5	21,2	27,2
720	22,5	21,2	42,3	20,6	19,4	25,1
660	20,6	19,4	38,7	18,8	17,6	23,0
600	18,8	17,6	35,0	16,9	15,9	20,9
540	16,9	15,9	31,3	15,0	14,1	18,8
480	15,0	14,1	27,7	13,1	12,4	16,8
420	13,1	12,4	24,0	11,3	10,6	14,7
360	11,3	10,6	20,4	9,4	8,8	12,6
300	9,4	8,8	16,7	7,5	7,1	10,5
240	7,5	7,1	13,1	5,6	5,3	8,4

B.2 ALUMEGA HP connectors fastened with bolts or metal anchors in concrete or steel

Tensile loading parallel to the joist axis

$$F_{1,HP,Rk} = \min \left\{ n_H \cdot F_{ax,H,Rk}; 284 \cdot H_k \text{ [N]} \right\} \quad (B.20)$$

Loading down or up:

$$F_{2,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_H \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{e \cdot z_{max}}{I_{p,H,ax} \cdot F_{ax,H,Rk}} \right)^2}}; F_{2,alu,Rk} \right\} \quad (B.21)$$

$$F_{3,HP,Rk} = \min \left\{ \frac{1}{\sqrt{\left(\frac{1}{n_H \cdot F_{v,H,Rk}} \right)^2 + \left(\frac{e \cdot z_{max}}{I_{p,H,ax} \cdot F_{ax,H,Rk}} \right)^2}}; F_{3,alu,Rk} \right\} \quad (B.22)$$

Where:

- n_H Number of bolts or metal anchors in the header connection; there must always be at least bolts or metal anchors in the two upper holes for loading down or in the two lower holes for loading up
- H_k ALUMEGA connector depth in mm, $H_d = H_k / \gamma_{M2}$
- e Distance between the load $F_{2,Ed}$ and the header surface, $e = 33 \text{ mm}$
- z_{max} Distance between the uppermost bolt or metal anchor and the lower end of the joist bearing for loading DOWN or distance between the lowermost bolt or metal anchor and the upper end of the joist bearing for loading UP;
- $I_{p,H,ax}$ Polar moment of inertia of the header fasteners where the centre of rotation may be assumed at the lower or upper end of the ALUMEGA HP;
- $F_{v,H,Rk}$ Characteristic value of the lateral load-carrying-capacity per bolt or metal anchor in the header connection
- $F_{ax,H,Rk}$ Characteristic value of the axial load-carrying-capacity per bolt or metal anchor in the header

For load direction F_{45} , equation (B.17) applies.

If $F_{1,Ed}$ or $F_{2,Ed}$ or $F_{3,Ed}$ or $F_{45,Ed}$ act simultaneously, the following interaction equation shall be fulfilled:

$$\left(\frac{F_{1,Ed}}{F_{1,Rd}} \right)^2 + \left(\frac{F_{2,Ed}}{F_{2,Rd}} \right)^2 + \left(\frac{F_{3,Ed}}{F_{3,Rd}} \right)^2 + \left(\frac{F_{45,Ed}}{F_{45,Rd}} \right)^2 \leq 1,0 \quad (B.23)$$

B.3 Slip moduli of ALUMEGA connectors

The slip moduli do not consider the initial slip due to oversized connector holes. The slip moduli are given separately for HV/HP, JV/JS and aluminium connection between HV/HP and JV/JS. The resulting slip modulus is:

$$K_{ser} = \frac{1}{\frac{1}{K_{JV/JS,ser}} + \frac{1}{K_{alu,ser}} + \frac{1}{K_{HV/HP,ser}}} \quad (B.24)$$



Table B.4: Slip moduli K_{ser} [kN/mm] for ALUMEGA connectors

	F ₁			F ₂					F ₃				
ALUMEGA	HV	JV	Alu	HV	HP*	JV	JS	Alu	HV	HP*	JV	JS	Alu
840	103	52	177	222	87	248	38	306	16	87	12	38	284
780	96	48	165	206	81	230	36	284	14	81	11	36	262
720	89	44	152	190	74	213	33	262	13	74	10	33	240
660	81	41	139	174	68	195	30	240	12	68	10	30	218
600	74	37	127	158	62	177	27	218	11	62	9	27	197
540	67	33	114	142	56	159	25	197	10	56	8	25	175
480	59	30	101	127	50	142	22	175	9	50	7	22	153
420	52	26	89	111	43	124	19	153	8	43	6	19	131
360	44	22	76	95	37	106	16	131	7	37	5	16	109
300	37	18	63	79	31	89	14	109	6	31	4	14	87
240	30	15	51	63	25	71	11	87	4	25	3	11	66



* Values for full pattern. For partial pattern, multiply with 14/27

Annex C
Installation of ALUMEGA connectors



ALUMEGA HP + ALUMEGA JS

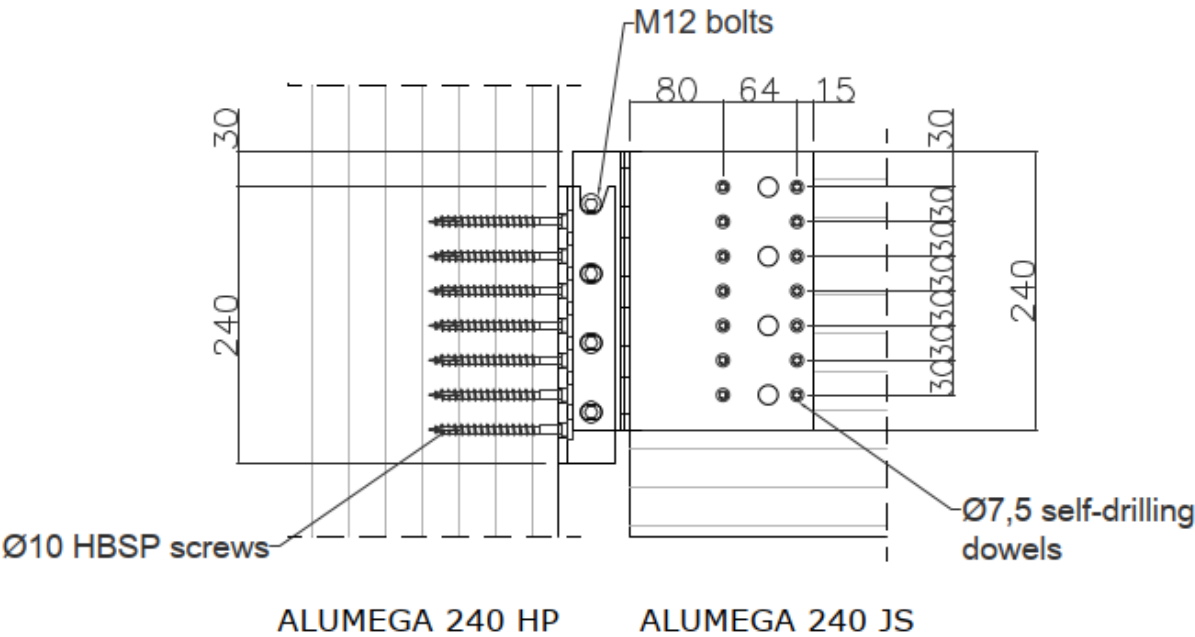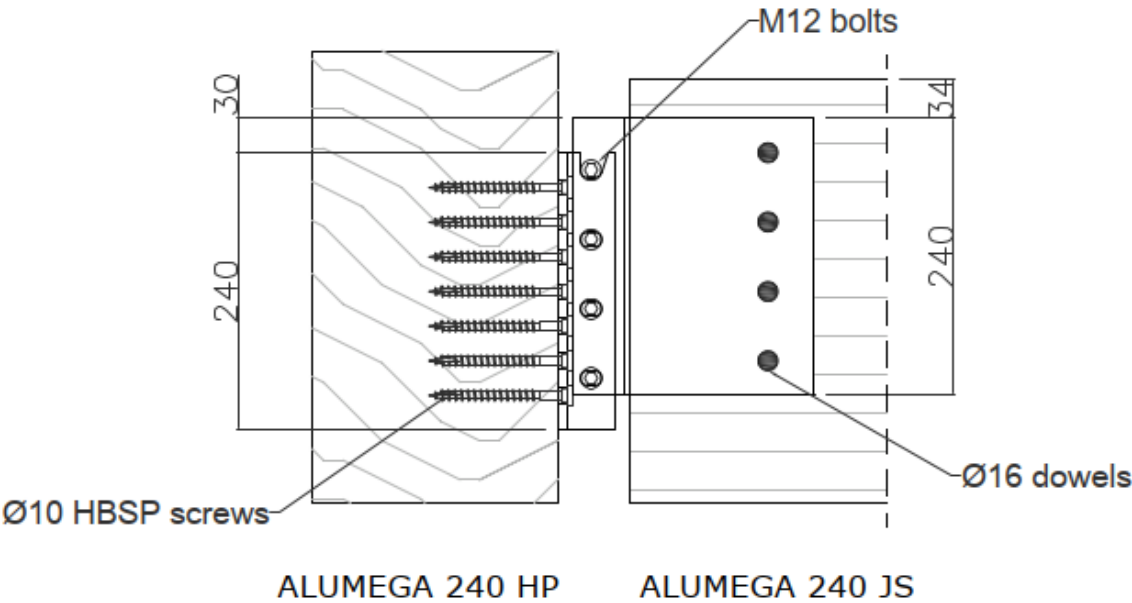



ALUMEGA HP + ALUMEGA JV

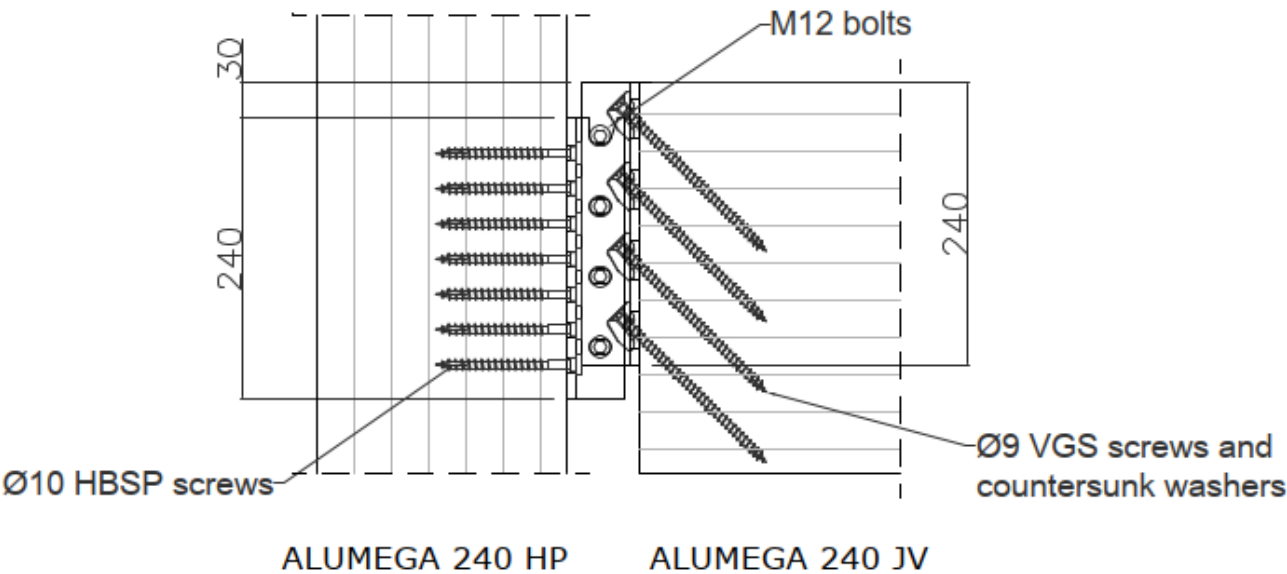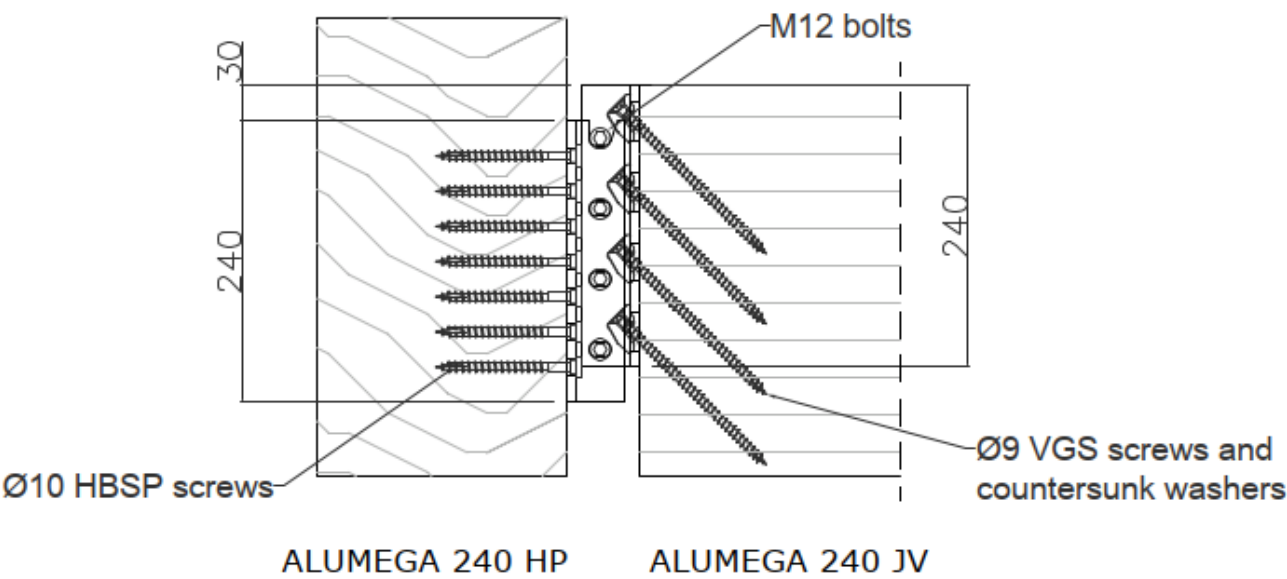


ALUMEGA HV + ALUMEGA JV

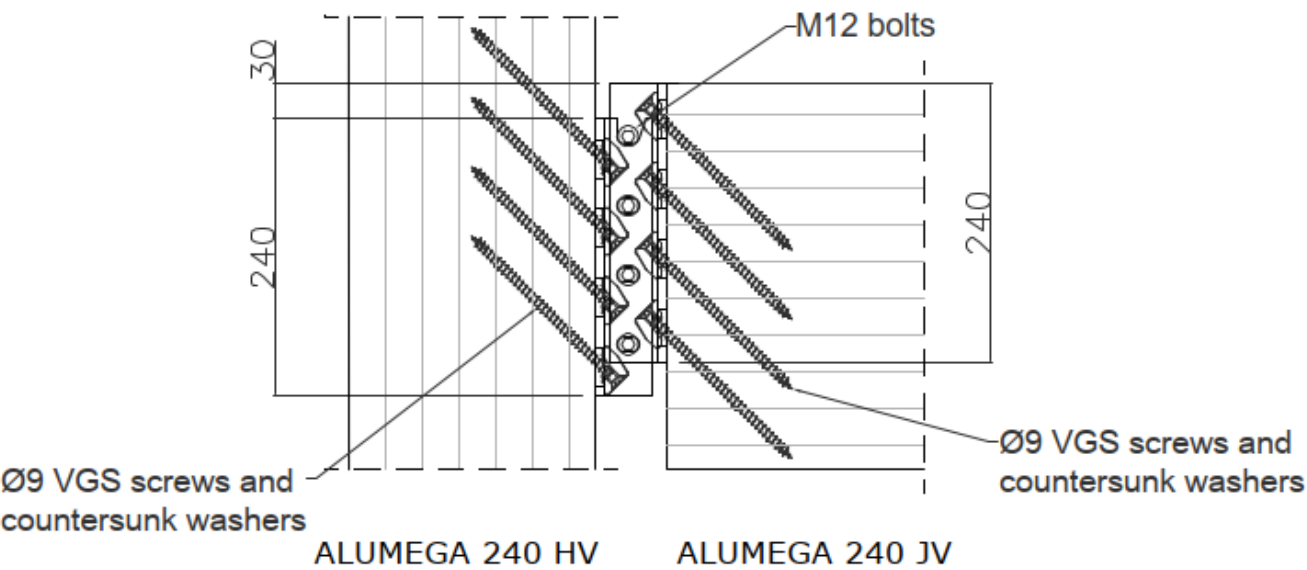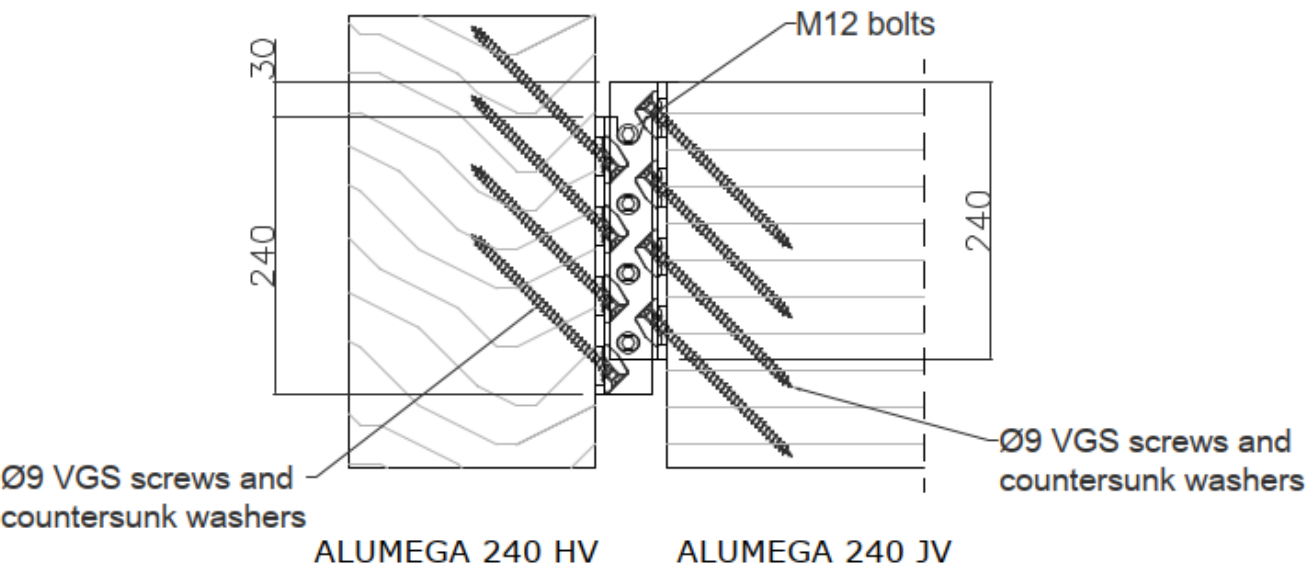


ALUMEGA HV + ALUMEGA JS

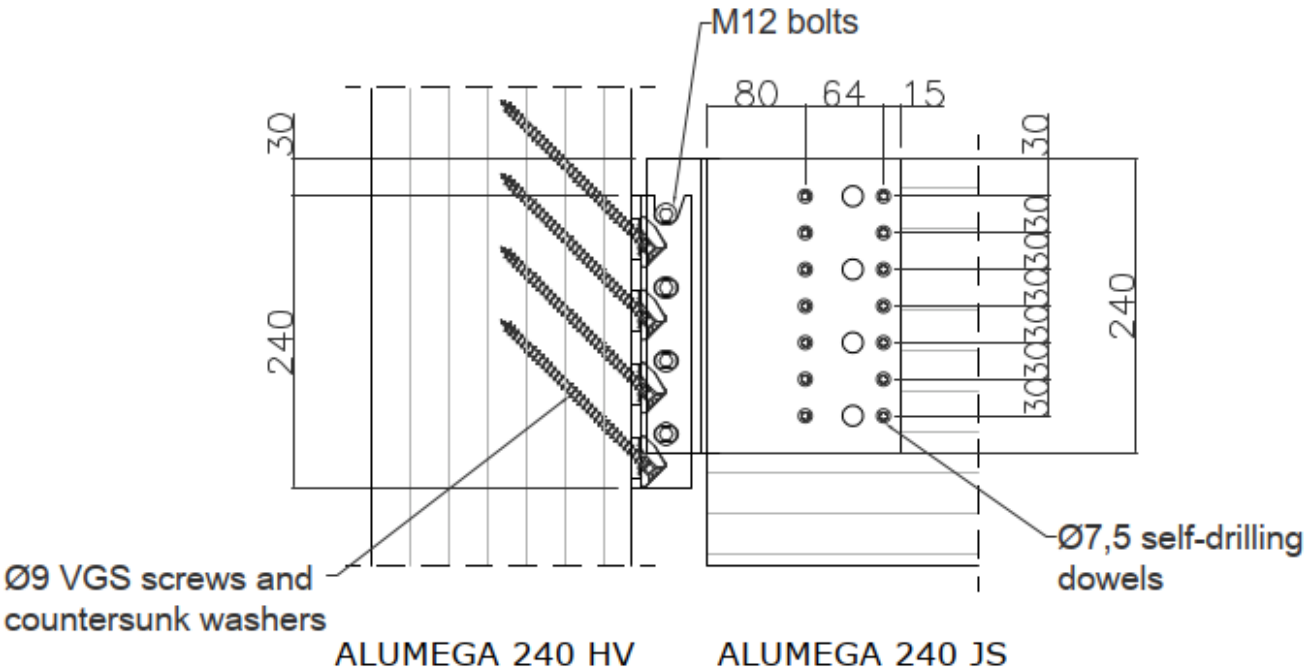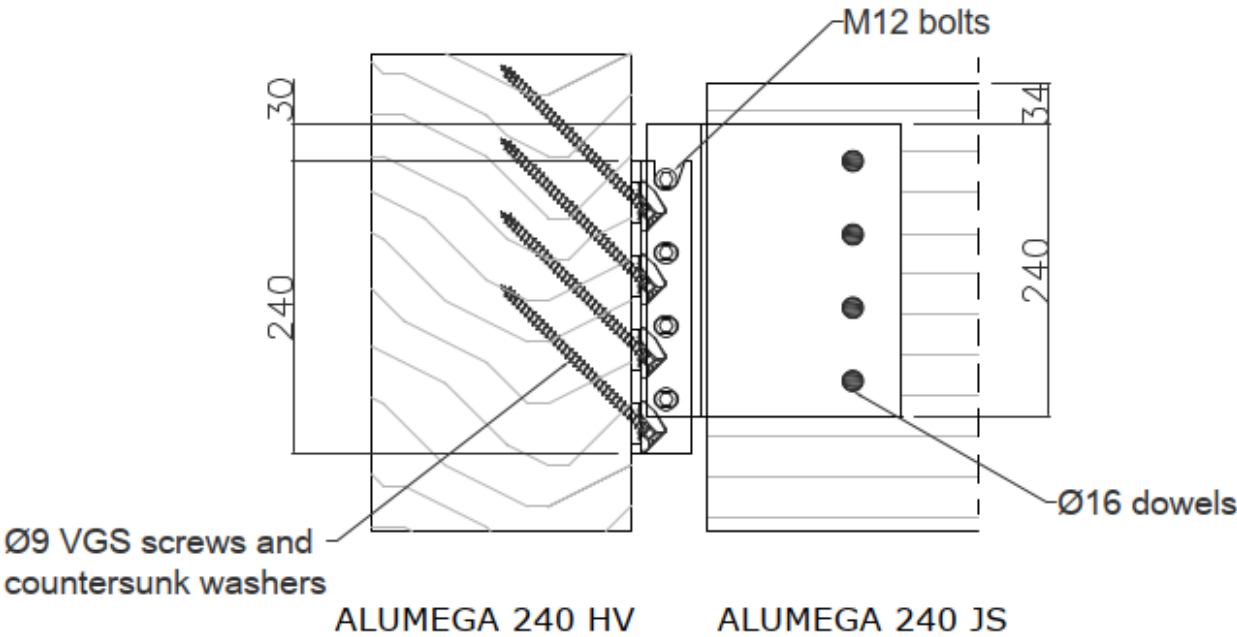

ALUMEGA HP FIXED WITH BOLTS OR THREADED RODS TO TIMBER

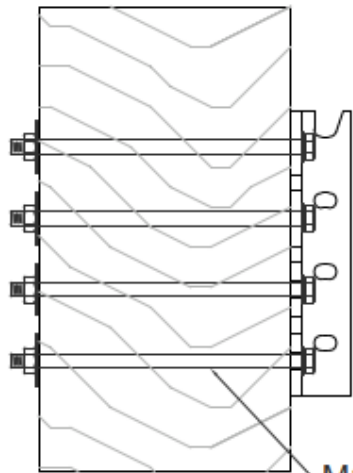


SINGLE SIDED
ALUMEGA 240 HP

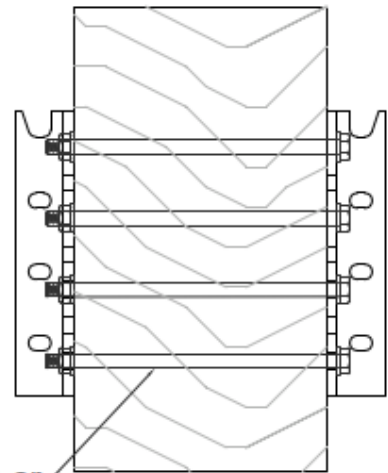


DOUBLE SIDED
ALUMEGA 240 HP

ALUMEGA HP FIXED TO CONCRETE

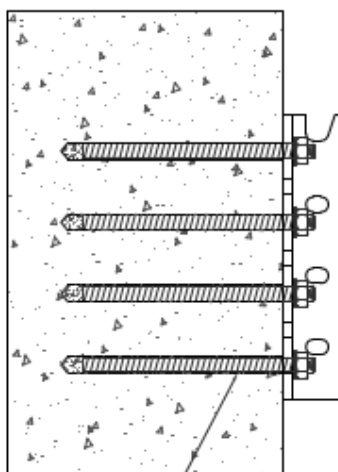


M12 threaded rods
and chemical anchor

ALUMEGA HP FIXED TO STEEL

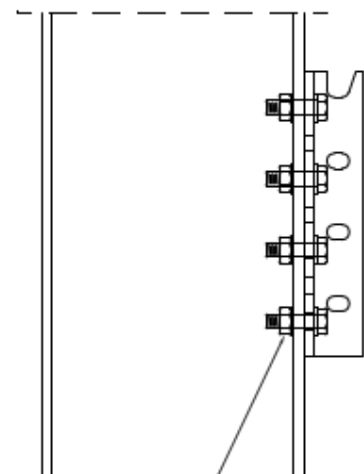


M12 steel bolt


**ALUMEGA HV PARTIAL PATTERN +
ALUMEGA JV FULL PATTERN**

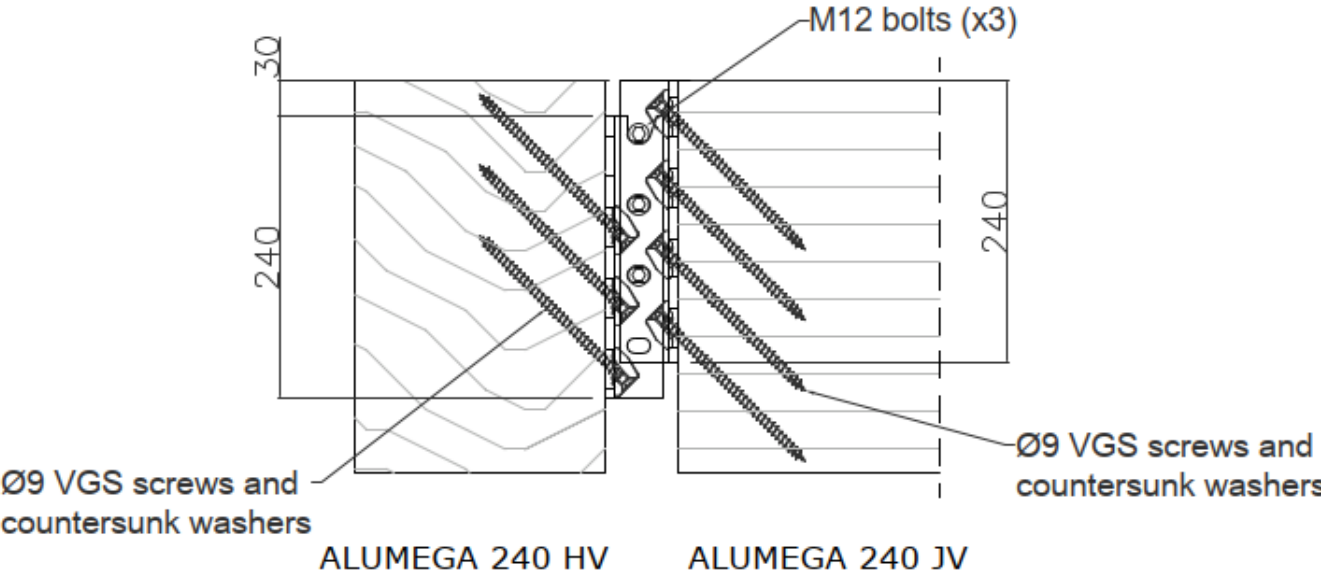


**ALUMEGA HV FULL PATTERN +
ALUMEGA JV PARTIAL PATTERN**

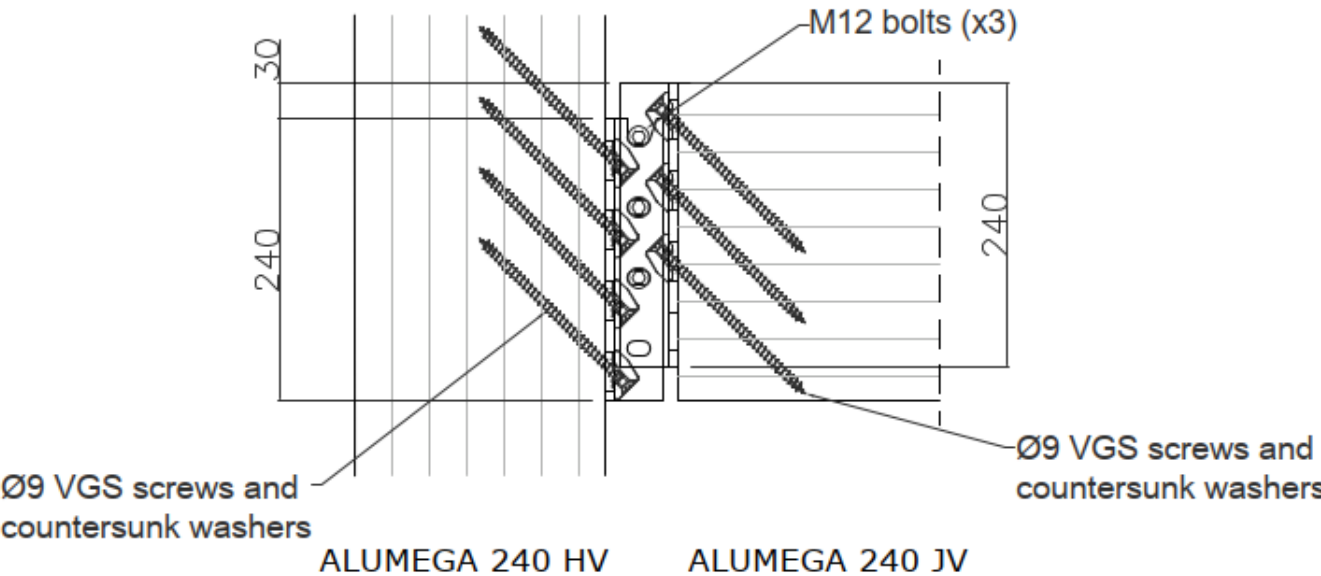



ALUMEGA HP PARTIAL PATTERN +
ALUMEGA JV FULL PATTERN

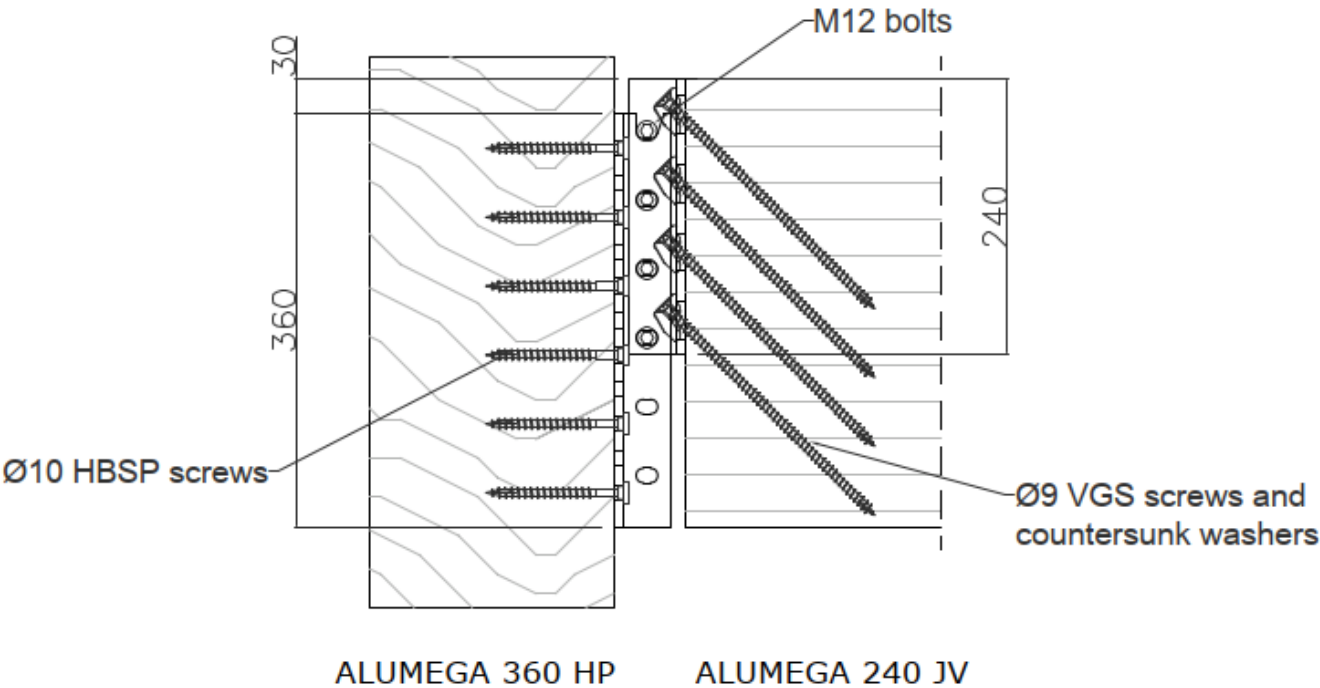

ALUMEGA HP FULL PATTERN +
ALUMEGA JV FULL PATTERN

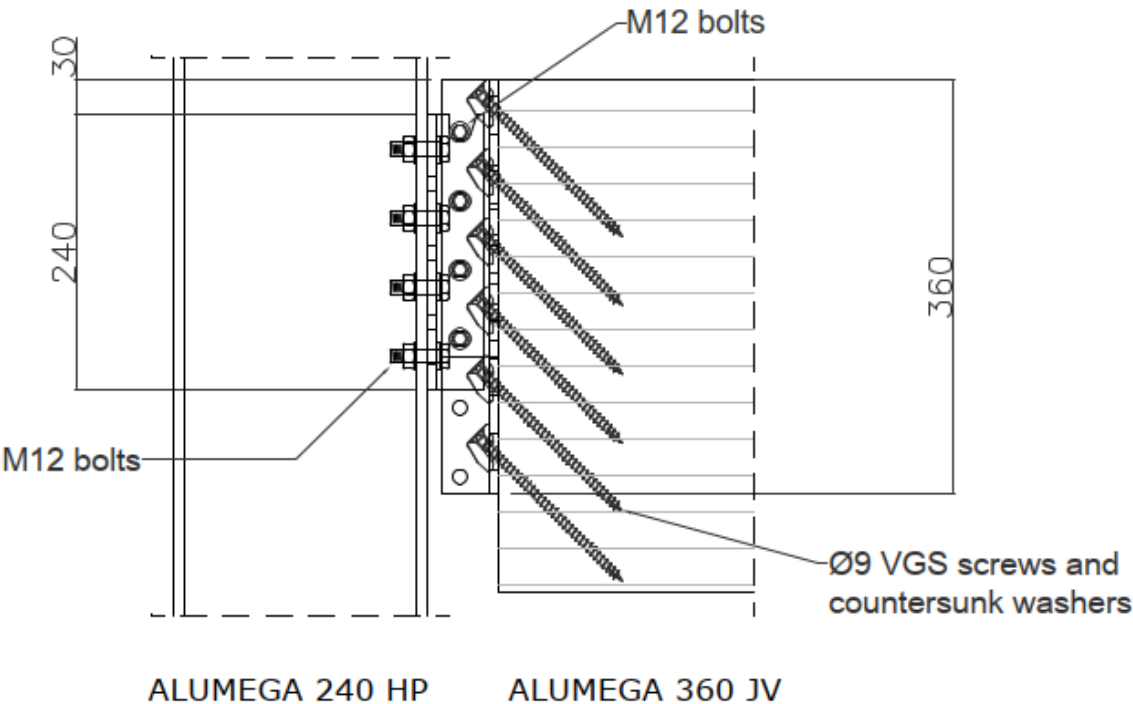


ALUMEGA HP SIDE-BY-SIDE

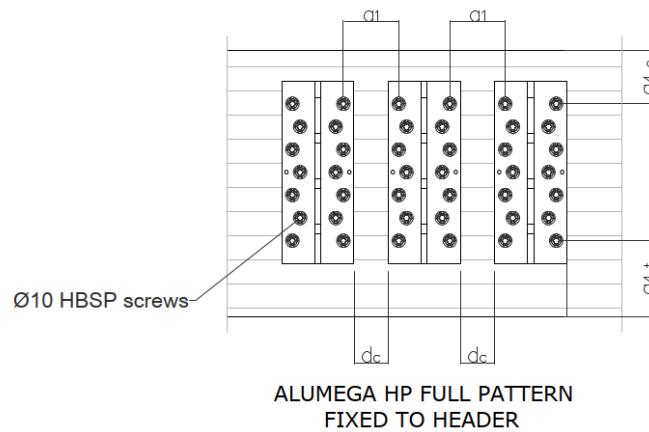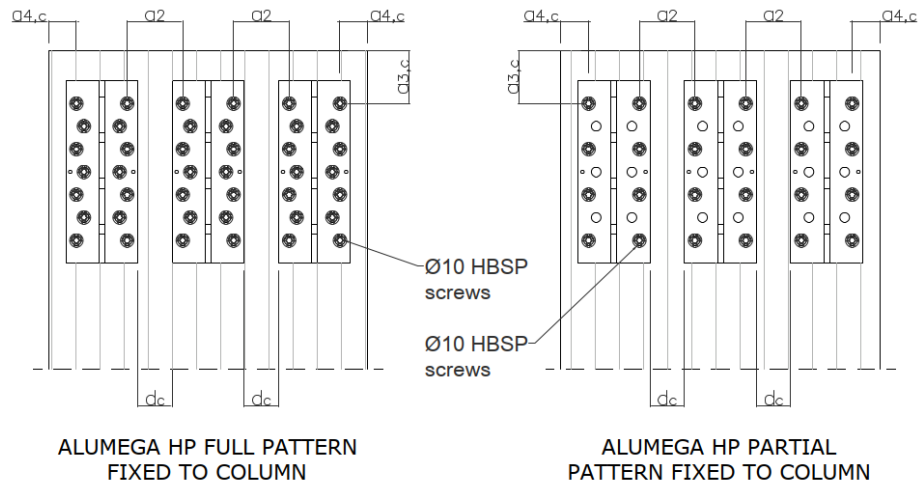


Load direction F_2 , ALUMEGA HP column, non-pre-drilled holes: $a_{3,c} \geq 7 d$ $a_{4,c} \geq 3.6 d$

For all other minimum spacing and distance requirements see ETA-11/0030.

ALUMEGA HV SIDE-BY-SIDE

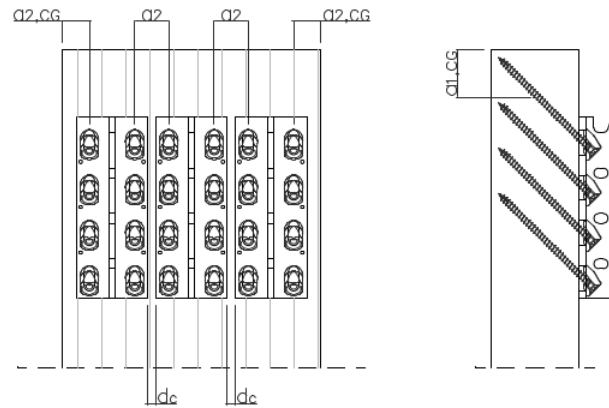

ALUMEGA HV FULL PATTERN
FIXED TO COLUMN

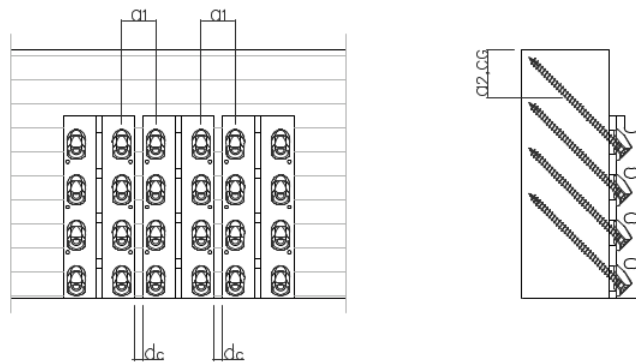

ALUMEGA HV FULL PATTERN
FIXED TO HEADER

Load direction F_2 , ALUMEGA HV column, non-pre-drilled holes:

$$a_{1,CG} \geq 8.4 d$$


$$a_{2,CG} \geq 4 d$$

Load direction F_2 , ALUMEGA HV header, non-pre-drilled holes:

$$a_{2,CG} \geq 4 d$$

For all other minimum spacing and distance requirements see ETA-11/0030.

ALUMEGA JV SIDE-BY-SIDE

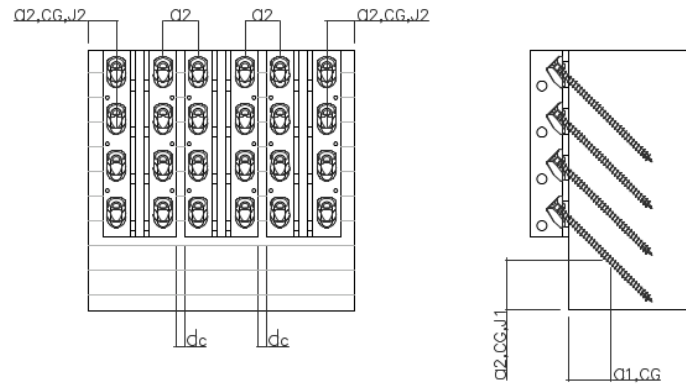

ALUMEGA JV FULL PATTERN
FIXED TO JOIST

Load direction F_2 , ALUMEGA JV, non-pre-drilled holes: $a_{1,CG} \geq 6 d$ $a_{2,CG,J1} \geq 8.4 d$ $a_{2,CG,J2} \geq 4 d$


For all other minimum spacing and distance requirements see ETA-11/0030.

Minimum clear spacing d_c :


- Load direction F_1 :
 - ALUMEGA HP column: $d_c = 22 \text{ mm}$
 - ALUMEGA HP header: $d_c = 42 \text{ mm}$
 - ALUMEGA HV or JV, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 10 \text{ mm}$
 - ALUMEGA HV or JV, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 28 \text{ mm}$
- Load direction F_2 :
 - ALUMEGA HP, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 22 \text{ mm}$
 - ALUMEGA HP, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 42 \text{ mm}$
 - ALUMEGA HV column: $d_c = 10 \text{ mm}$
 - ALUMEGA HV header: $d_c = 10 \text{ mm}$
 - ALUMEGA JV: $d_c = 10 \text{ mm}$
- Load direction F_3 :
 - ALUMEGA HP, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 22 \text{ mm}$
 - ALUMEGA HP, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 42 \text{ mm}$
 - ALUMEGA HV or JV, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 10 \text{ mm}$
 - ALUMEGA HV or JV, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 28 \text{ mm}$
- Load direction F_{45} :
 - ALUMEGA HP column, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 22 \text{ mm}$
 - ALUMEGA HP column, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 42 \text{ mm}$
 - ALUMEGA HP header, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 92 \text{ mm}$
 - ALUMEGA HP header, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 122 \text{ mm}$
 - ALUMEGA HV column or JV, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 10 \text{ mm}$
 - ALUMEGA HV column or JV, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 28 \text{ mm}$
 - ALUMEGA HV header, $\rho_k \leq 420 \text{ kg/m}^3$: $d_c = 73 \text{ mm}$
 - ALUMEGA HV header, $\rho_k \leq 500 \text{ kg/m}^3$: $d_c = 100 \text{ mm}$

For combinations of load directions, the maximum value governs.

FIXING OPTIONS M12 METRIC STEEL BOLT

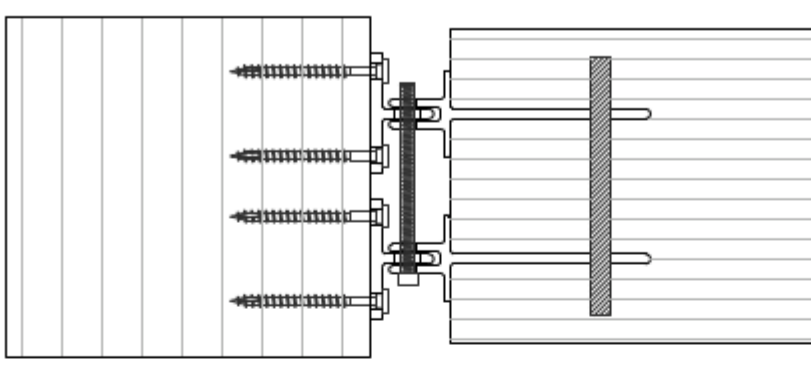


SINGLE FULLY THREADED
M12 METRIC BOLT

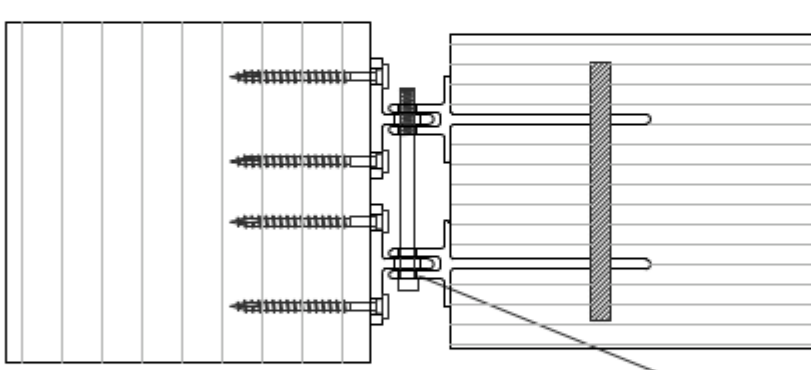




SINGLE PARTIALLY THREADED
M12 METRIC BOLT

Threaded holes in the
ALUMEGA JS connector
are enlarged to 13 mm
diameter holes

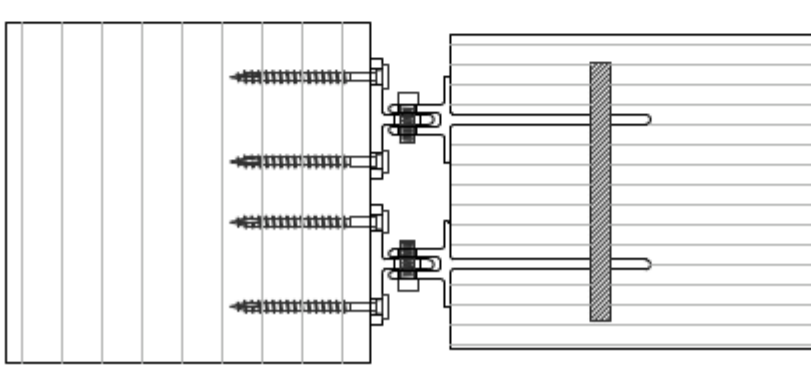


TWO SINGLE PARTIALLY
THREADED M12 METRIC BOLTS

PRIMARY MEMBER
INCLINATION

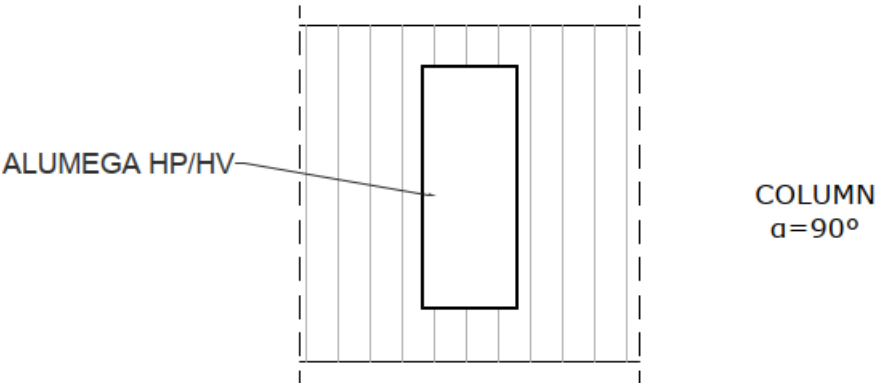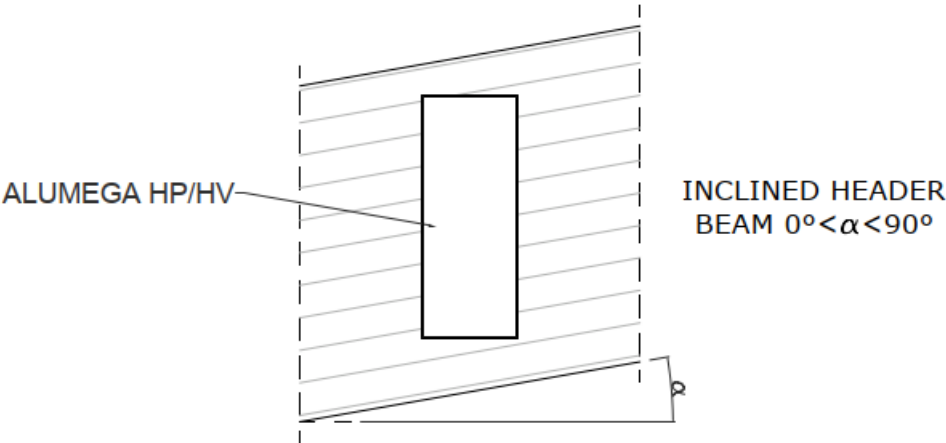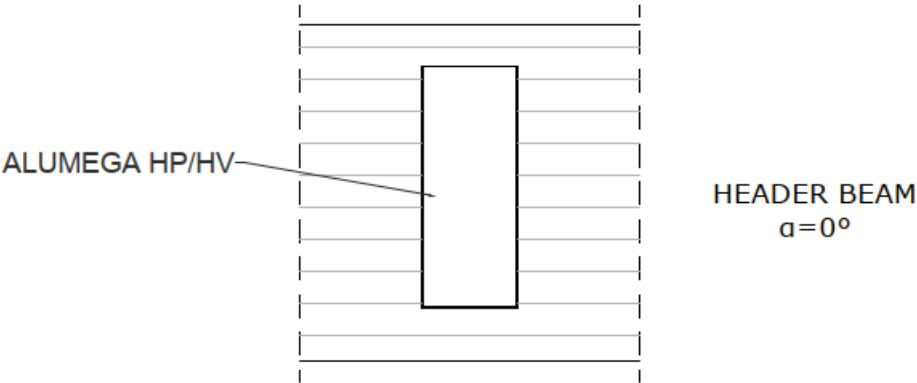


JOIST INCLINATION

PLAN


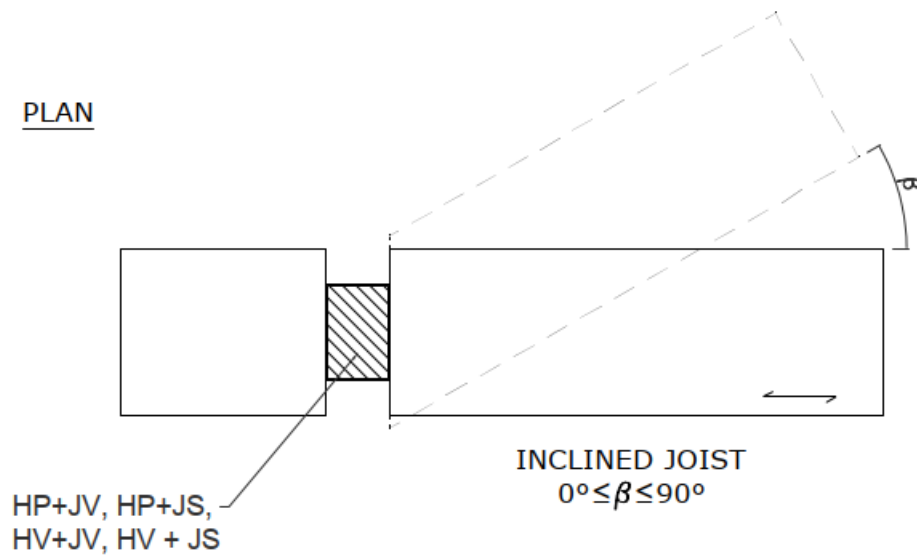


ELEVATION

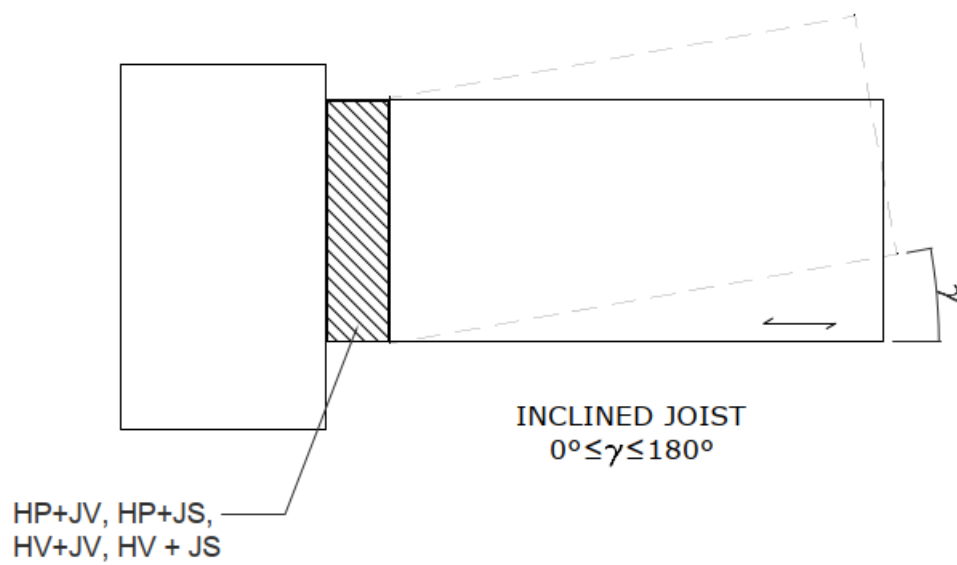

All fasteners must be fully embedded in the timber members and the minimum spacing and end or edge distances of each fastener must be observed

INSTALLATION TOLERANCE

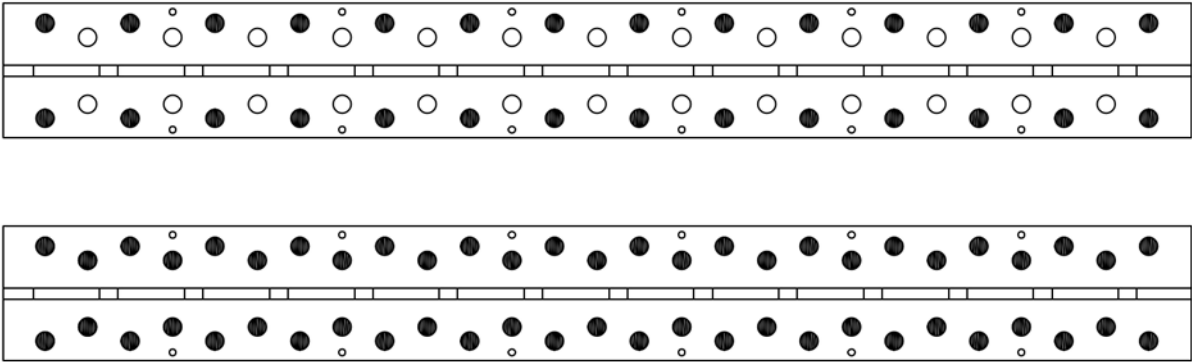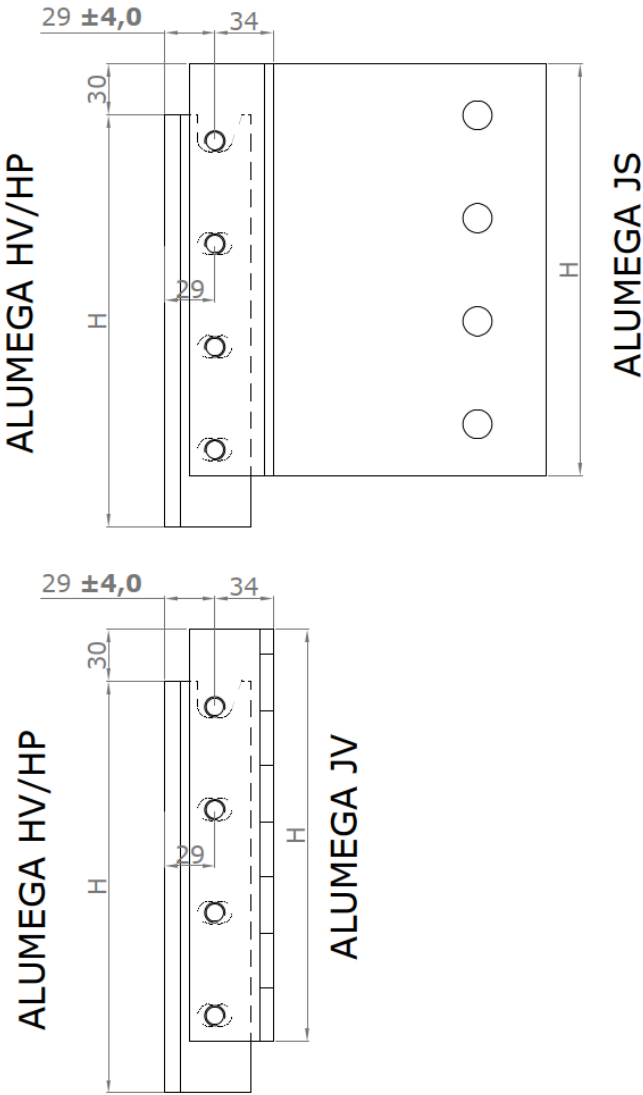

Partial (top) and full (bottom) fastener pattern for ALUMEGA 840 HP.