


Centre Scientifique et
Technique du Bâtiment
84 avenue Jean Jaurès
CHAMPS-SUR-MARNE
F-77447 Marne-la-Vallée Cedex 2
Tél. : (33) 01 64 68 82 82
Fax : (33) 01 60 05 70 37



CSTB
le futur en construction
MEMBRE DE L'EOTA

European Technical Approval **ETA-07/0067**

(English language translation, the original version is in French language)

ROTHO BLAAS Torque-controlled expansion anchor AB7 - normal sizes: **Correlation Table ETA - Codes**

European Technical Approval **ETA-07/0067**
SITA ACCIAIO CE-TTSK

Rotho Blaas Code:	Dimension:
FE210420	10 x 75
FE210435	12 x 90
FE210485	16 x 150
FE210460	16 x 200
FE210465	20 x 160

ETA-Danmark A/S
Kollegievej 6
DK-2920 Charlottenlund
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according to
Article 10 of the Council Directive
89/106/EEC of 21 December 1988 on
the approximation of laws, regulations
and administrative provisions of
Member States relating to construction
products



MEMBER OF EOTA

European Technical Approval **ETA-10/0449**

ROTHO BLAAS Torque-controlled expansion anchor AB7 - extra-long sizes: **Correlation Table ETA - Codes**


European Technical Approval **ETA-10/0449**
SITA ACCIAIO CE7

Rotho Blaas Code:	Dimension:
FE210500 *	16 x 300
FE210495 *	16 x 400

* extra-long sizes

Centre Scientifique et Technique du Bâtiment

84 avenue Jean Jaurès
CHAMPS-SUR-MARNE
F-77447 Marne-la-Vallée Cedex 2
Tél. : (33) 01 64 68 82 82
Fax : (33) 01 60 05 70 37



CSTB
le futur en construction

MEMBRE DE L'EOTA

European Technical Approval **ETA-07/0067**

(English language translation, the original version is in French language)

Nom commercial :

Trade name:

Titulaire :

Holder of approval:

Type générique et utilisation prévue du
produit de construction :

**Generic type and use of
construction product:**

Validité du :
au :

Validity from / to:

Usine de fabrication :

Manufacturing plant:

Le présent Agrément technique européen
contient :

**This European Technical Approval
contains:**

SITA ACCIAIO CE-TTSK

G & B Fissaggi s.r.l.

Corso Savona 22
10029 Villastellone
Italy

Cheville métallique en acier galvanisé, à expansion par vissage à
couple contrôlé, de fixation dans le béton non fissuré : diamètres M8,
M10, M12, M16 et M20.

**Torque-controlled expansion anchor, made of galvanised
steel, for use in non cracked concrete: sizes M8, M10, M12,
M16 and M20.**

21/05/2007

21/05/2012

Plan 3A

Plan 3B

13 pages incluant 6 annexes faisant partie intégrante du document.

**13 pages including 6 annexes which form an integral part of
the document.**



Organisation pour l'Agrément Technique Européen
European Organisation for Technical Approvals

I LEGAL BASES AND GENERAL CONDITIONS

1. This European Technical Approval is issued by the Centre Scientifique et Technique du Bâtiment in accordance with:
 - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, modified by the Council Directive 93/68/EEC of 22 July 1993²;
 - Décret n°92-647 du 8 juillet 1992³ concernant l'aptitude à l'usage des produits de construction;
 - Common Procedural Rules for Requesting, Preparing and the Granting of European Technical Approvals set out in the Annex of Commission Decision 94/23/EC⁴;
 - Guideline for European Technical Approval of « Metal Anchors for use in Concrete » ETAG 001, edition 1997, Part 1 « Anchors in general » and Part 2 « Torque-controlled expansion anchors ».
2. The Centre Scientifique et Technique du Bâtiment is authorised to check whether the provisions of this European Technical Approval are met. Checking may take place in the manufacturing plant (for example concerning the fulfilment of assumptions made in this European Technical Approval with regard to manufacturing). Nevertheless, the responsibility for the conformity of the products with the European Technical Approval and for their fitness for the intended use remains with the holder of the European Technical Approval.
3. This European Technical Approval is not to be transferred to manufacturers or agents of manufacturer other than those indicated on page 1; or manufacturing plants other than those indicated on page 1 of this European Technical Approval.
4. This European Technical Approval may be withdrawn by the Centre Scientifique et Technique du Bâtiment pursuant to Article 5 (1) of the Council Directive 89/106/EEC.
5. Reproduction of this European Technical Approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of the Centre Scientifique et Technique du Bâtiment. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European Technical Approval.
6. The European Technical Approval is issued by the approval body in its official language. This version corresponds to the version circulated within EOTA. Translations into other languages have to be designated as such.

¹ Official Journal of the European Communities n° L 40, 11.2.1989, p. 12

² Official Journal of the European Communities n° L 220, 30.8.1993, p. 1

³ Journal officiel de la République française du 14 juillet 1992

⁴ Official Journal of the European Communities n° L 17, 20.1.1994, p. 34

II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of product and intended use

1.1. Definition of product

The SITA ACCIAIO CE-TTSK anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of galvanised steel, which is placed into a drilled hole and anchored by torque-controlled expansion.

For the installed anchor see Figure given in Annex 1.

1.2. Intended use

The anchor is intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 of Council Directive 89/106/EEC shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences. The anchor is to be used only for anchorages subject to static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength classes C20/25 minimum to C50/60 maximum according to ENV 206-1: 2000-12. It may be anchored in non-cracked concrete only.

The anchor may only be used in concrete subject to dry internal conditions.

The provisions made in this European Technical Approval are based on an assumed intended working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

2 Characteristics of product and methods of verification

2.1. Characteristics of product

The anchor SITA ACCIAIO CE-TTSK in the range of M8, M10, M12, M16 and M20 corresponds to the drawings and provisions given in Annexes 1 to 3. The characteristic material values, dimensions and tolerances of the anchor not indicated in Annexes 2 and 3 shall correspond to the respective values laid down in the technical documentation⁵ of this European Technical Approval. The characteristic anchor values for the design of anchorages are given in Annexes 4 to 6.

Each anchor is marked on the bolt with the product name SITA ACCIAIO CE-TTSK, the bolt diameter and the total length of the anchor according to Annex 1. A letter code corresponding to the total length of the bolt is stamped on the dog point (above bolt end).

The anchor shall only be packaged and supplied as a complete unit.

⁵ The technical documentation of this European Technical Approval is deposited at the Centre Scientifique et Technique du Bâtiment and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies.

2.2. Methods of verification

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 has been made in accordance with the « Guideline for European Technical Approval of Metal Anchors for use in Concrete », Part 1 « Anchors in general » and Part 2 « Torque-controlled expansion anchors », on the basis of Option 7.

3 Evaluation of Conformity and CE marking

3.1. Attestation of conformity system

The system of attestation of conformity 2 (i) (referred to as system 1) according to Council Directive 89/106/EEC Annex III laid down by the European Commission provides:

a) tasks for the manufacturer:

1. factory production control,
2. further testing of samples taken at the factory by the manufacturer in accordance with a prescribed test plan.

b) tasks for the approved body:

3. initial type-testing of the product,
4. initial inspection of factory and of factory production control,
5. continuous surveillance, assessment and approval of factory production control.

3.2. Responsibilities

3.2.1. Tasks of the manufacturer, factory production control

The manufacturer has a factory production control system in the plant and exercises permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures. This production control system ensures that the product is in conformity with the European Technical Approval.

The manufacturer shall only use raw materials supplied with the relevant inspection documents as laid down in the prescribed test plan⁶. The incoming raw materials shall be subject to controls and tests by the manufacturer before acceptance. Check of incoming materials such as nuts, washers, wire for bolts and metal band for expansion sleeves shall include control of the inspection documents presented by suppliers (comparison with nominal values) by verifying dimension and determining material properties, e.g. tensile strength, hardness, surface finish.

The manufactured components of the anchor shall be subjected to the following tests:

- Dimensions of component parts:

⁶

The prescribed test plan has been deposited at the Centre Scientifique et Technique du Bâtiment and is only made available to the approved bodies involved in the conformity attestation procedure.

bolt (diameters, lengths, thread, geometry of the cone, marking);
sleeve (length, thickness, catch sizes);
hexagonal nut (proper running, wrench size across flats);
washer (diameters, thickness).

- Material properties: bolt (yielding and ultimate tensile strengths), sleeve (ultimate tensile strength), hexagonal nut (proof load), washer (hardness).
- Thickness of the galvanised treatment of the elements.
- Visual control of correct assembly and of completeness of the anchor.

The frequency of controls and tests conducted during production and on the assembled anchor is laid down in the prescribed test plan taking account of the automated manufacturing process of the anchor.

The results of factory production control are recorded and evaluated. The records include at least the following information:

- designation of the product, basic material and components;
- type of control or testing;
- date of manufacture of the product and date of testing of the product or basic material and components;
- result of control and testing and, if appropriate, comparison with requirements;
- signature of person responsible for factory production control.

The records shall be presented to the inspection body during the continuous surveillance. On request, they shall be presented to the Centre Scientifique et Technique du Bâtiment.

Details of the extent, nature and frequency of testing and controls to be performed within the factory production control shall correspond to the prescribed test plan which is part of the technical documentation of this European Technical Approval.

3.2.2. Tasks of approved bodies

3.2.2.1. Initial type-testing of the product

For initial type-testing the results of the tests performed as part of the assessment for the European Technical Approval shall be used unless there are changes in the production line or plant. In such cases the necessary initial type-testing has to be agreed between the Centre Scientifique et Technique du Bâtiment and the approved bodies involved.

3.2.2.2. Initial inspection of factory and of factory production control

The approved body shall ascertain that, in accordance with the prescribed test plan, the factory and the factory production control are suitable to ensure continuous and orderly manufacturing of the anchor according to the specifications mentioned in 2.1. as well as to the Annexes to the European Technical Approval.

3.2.2.3. Continuous surveillance

The approved body shall visit the factory at least once a year for regular inspection. It has to be verified that the system of factory production control and the specified automated manufacturing process are maintained taking account of the prescribed test plan.

Continuous surveillance and assessment of factory production control have to be performed according to the prescribed test plan.

The results of product certification and continuous surveillance shall be made available on demand by the certification body or inspection body, respectively, to the Centre Scientifique et Technique du Bâtiment. In cases where the provisions of the European Technical Approval and the prescribed test plan are no longer fulfilled the conformity certificate shall be withdrawn.

3.3. CE-Marking

The CE marking shall be affixed on each packaging of anchors. The symbol « CE » shall be accompanied by the following information:

- identification number of the certification body;
- name or identifying mark of the producer and manufacturing plant;
- the last two digits of the year in which the CE-marking was affixed;
- number of the EC certificate of conformity;
- number of the European Technical Approval;
- use category (ETAG 001-1 Option 7);
- size.

4 Assumptions under which the fitness of the product for the intended use was favourably assessed

4.1. Manufacturing

The anchor is manufactured in accordance with the provisions of the European Technical Approval using the automated manufacturing process as identified during inspection of the plant by the Centre Scientifique et Technique du Bâtiment and the approved body and laid down in the technical documentation.

4.2. Installation

4.2.1. Design of anchorages

The fitness of the anchors for the intended use is given under the following conditions:

The anchorages are designed in accordance with the « Guideline for European Technical Approval of Metal Anchors for Use in Concrete », Annex C, Method A, for torque-controlled expansion anchors under the responsibility of an engineer experienced in anchorages and concrete work.

Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.

The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to support, etc.).

4.2.2. Installation of anchors

The fitness for use of the anchor can only be assumed if the anchor is installed as follows:

- anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on the site;
- use of the anchor only as supplied by the manufacturer without exchanging the components of an anchor;
- anchor installation in accordance with the manufacturer's specifications and drawings prepared for that purpose and using the appropriate special tools;
- thickness of the fixture corresponding to the range of required thickness values for the type of anchor;
- checks before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply;
- check of concrete being well compacted, e.g. without significant voids;
- clearing the hole of drilling dust;
- anchor installation ensuring the specified embedment depth ;
- keeping of the edge distance and spacing to the specified values without minus tolerances;
- positioning of the drill holes without damaging the reinforcement;
- in case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load the filled hole is not in the direction of load application;
- application of the torque moment given in Annex 4 using a calibrated torque wrench.

4.2.3. Responsibility of the manufacturer

It is the manufacturer's responsibility to ensure that the information on the specific conditions according to 1 and 2 including Annexes referred to in 4.2.1. and 4.2.2. is given to those who are concerned. This information may be made by reproduction of the respective parts of the European Technical Approval. In addition all installation data shall be shown clearly on the package and/or on an enclosed instruction sheet, preferably using illustration(s).

The minimum data required are:


- drill bit diameter,
- thread diameter,
- maximum thickness of the fixture,
- minimum installation depth,
- minimum hole depth,
- required torque moment,
- information on the installation procedure, including cleaning of the hole, preferably by means of an illustration,
- reference to any special installation equipment needed,
- identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.

The original French version is signed by


**Le Directeur Technique
H. BERRIER**

Assembled anchor:

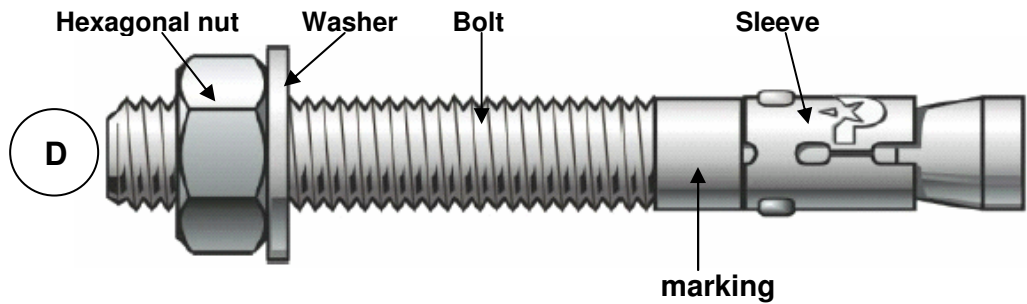

Marking: on the bolt, SITA ACCIAIO CE-TTSK product name, followed by X and Y,
where
X nominal diameter,
Y total length of the anchor
on the head (D), letter code that is function of the total length of the anchor.

Diagram of the anchor in use:

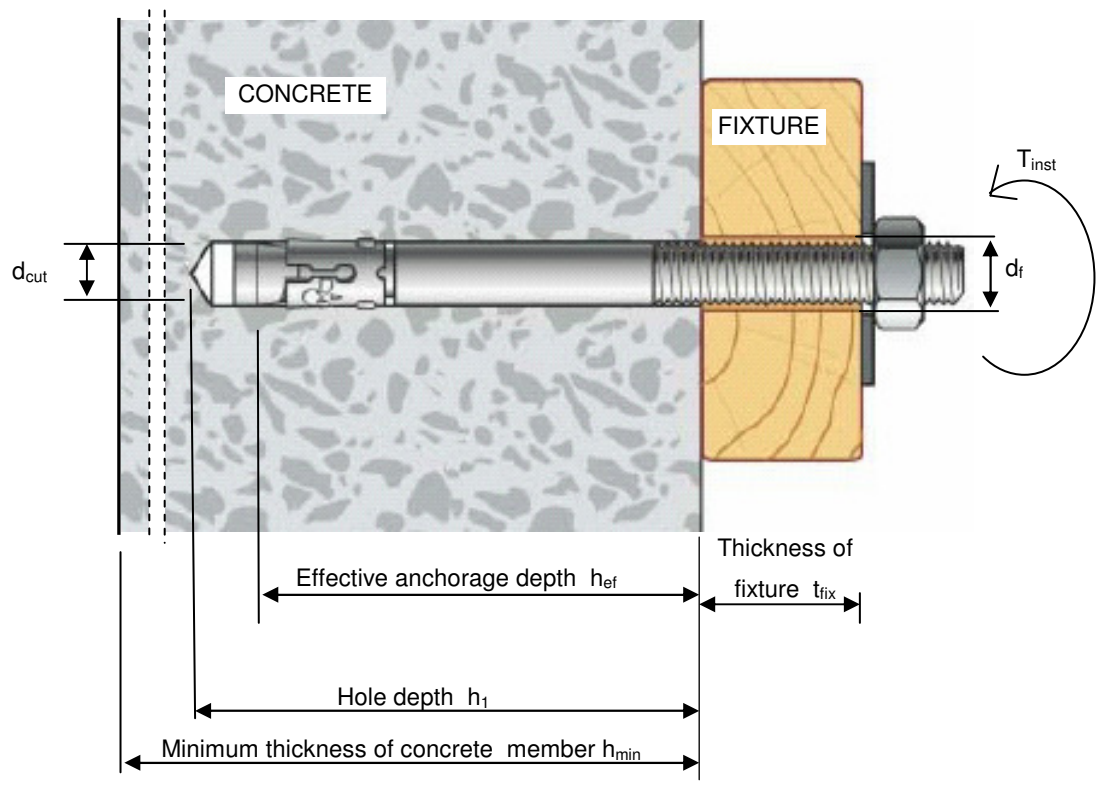

SITA ACCIAIO CE-TTSK torque-controlled expansion anchor

Product and intended use

Annexe 1

à l'Agrément Technique Européen
ETA-07/0067

Different parts of the anchor:

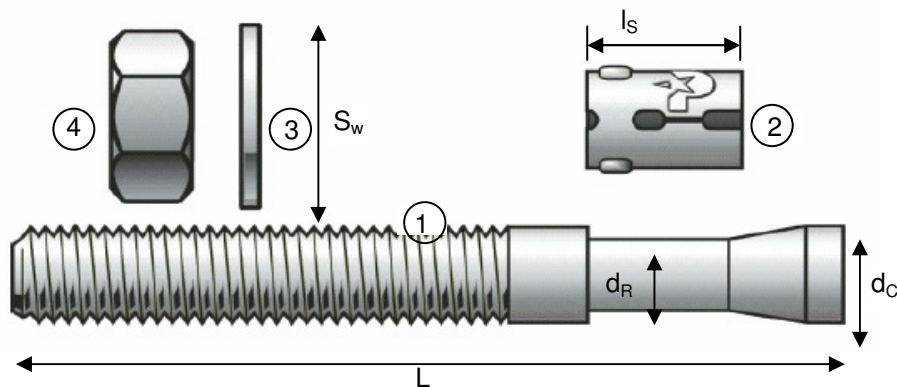


Table 1: Materials

Part	Designation	Material	Protection
1	Bolt M8, M10 M12 and M16	Grade 5.8 Steel cold formed	electroplated zinc coating
	Bolt M20	C-10B21 hardened and tempered Grade 4.6 machined	electroplated zinc coating
2	Sleeve	S/S 430	electroplated zinc coating
3	Washer	DIN 125A	electroplated zinc coating
		DIN 9021	electroplated zinc coating
4	Hexagonal nut	DIN 934	electroplated zinc coating

SITA ACCIAIO CE-TTSK torque-controlled expansion anchor

Materials

Annexe 2

à l'Agrément Technique Européen
ETA-07/0067

Table 2: Dimensions

Anchor type	M	L (mm)	S _w (mm)	d _R (mm)	d _C (mm)	l _S (mm)
SITA ACCIAIO CE-TTSK 8 x 65	M8	65	13	5,6	8,0	12,0
SITA ACCIAIO CE-TTSK 8 x 75		75				
SITA ACCIAIO CE-TTSK 8 x 80 (1)		80				
SITA ACCIAIO CE-TTSK 8 x 90		90				
SITA ACCIAIO CE-TTSK 8 x 95		95				
SITA ACCIAIO CE-TTSK 8 x 100		100				
SITA ACCIAIO CE-TTSK 8 x 115		115				
SITA ACCIAIO CE-TTSK 8 x 120		120				
SITA ACCIAIO CE-TTSK 8 x 130		130				
SITA ACCIAIO CE-TTSK 8 x 160		160				
SITA ACCIAIO CE-TTSK 10 x 75 (1)	M10	75	17	7,3	10,0	15,0
SITA ACCIAIO CE-TTSK 10 x 90 (1)		90				
SITA ACCIAIO CE-TTSK 10 x 120		120				
SITA ACCIAIO CE-TTSK 10 x 150		150				
SITA ACCIAIO CE-TTSK 12 x 90	M12	90	19	8,5	12,0	18,0
SITA ACCIAIO CE-TTSK 12 x 100		100				
SITA ACCIAIO CE-TTSK 12 x 120		120				
SITA ACCIAIO CE-TTSK 12 x 135		135				
SITA ACCIAIO CE-TTSK 12 x 140		140				
SITA ACCIAIO CE-TTSK 12 x 180		180				
SITA ACCIAIO CE-TTSK 12 x 190 (1)		190				
SITA ACCIAIO CE-TTSK 12 x 210 (1)		210				
SITA ACCIAIO CE-TTSK 12 x 230 (1)		230				
SITA ACCIAIO CE-TTSK 16 x 115	M16	115	24	11,5	16,0	24,0
SITA ACCIAIO CE-TTSK 16 x 125		125				
SITA ACCIAIO CE-TTSK 16 x 140		140				
SITA ACCIAIO CE-TTSK 16 x 150		150				
SITA ACCIAIO CE-TTSK 16 x 175		175				
SITA ACCIAIO CE-TTSK 16 x 190		190				
SITA ACCIAIO CE-TTSK 16 x 200		200				
SITA ACCIAIO CE-TTSK 20 x 130	M20	130	30	14,5	20,0	30,0
SITA ACCIAIO CE-TTSK 20 x 160		160				
SITA ACCIAIO CE-TTSK 20 x 200		200				
SITA ACCIAIO CE-TTSK 20 x 215		215				

Nota 1: these sizes can be fitted with a washer according to DIN 9021

SITA ACCIAIO CE-TTSK torque-controlled expansion anchor

Dimensions

Annexe 3

à l'Agrément Technique
Européen
ETA-07/0067

Table 3: Installation data

Anchor type	L (mm) (0)	Letter code marking	d_{cut} (mm) (1)	d_f (mm) (2)	T_{inst} (Nm) (3)	h_{min} (mm) (4)	h_1 (mm) (5)	h_{ef} (mm) (6)	t_{fix} (mm) (7)
SITA ACCIAIO CE-TTSK 8 x 65	65	C	8	9	15	100	65	50	5
SITA ACCIAIO CE-TTSK 8 x 75	75	E							15
SITA ACCIAIO CE-TTSK 8 x 80	80	G							20
SITA ACCIAIO CE-TTSK 8 x 90	90	I							30
SITA ACCIAIO CE-TTSK 8 x 95	95	K							35
SITA ACCIAIO CE-TTSK 8 x 100	100	M							40
SITA ACCIAIO CE-TTSK 8 x 115	115	N							55
SITA ACCIAIO CE-TTSK 8 x 120	120	O							60
SITA ACCIAIO CE-TTSK 8 x 130	130	Q							70
SITA ACCIAIO CE-TTSK 8 x 160	160	T							100
SITA ACCIAIO CE-TTSK 10 x 75	75	E	10	12	30	120	80	60	5
SITA ACCIAIO CE-TTSK 10 x 90	90	G							20
SITA ACCIAIO CE-TTSK 10 x 120	120	I							50
SITA ACCIAIO CE-TTSK 10 x 150	150	K							80
SITA ACCIAIO CE-TTSK 12 x 90	90	A	12	14	50	140	95	70	5
SITA ACCIAIO CE-TTSK 12 x 100	100	C							15
SITA ACCIAIO CE-TTSK 12 x 120	120	E							35
SITA ACCIAIO CE-TTSK 12 x 135	135	G							50
SITA ACCIAIO CE-TTSK 12 x 140	140	I							55
SITA ACCIAIO CE-TTSK 12 x 180	180	K							95
SITA ACCIAIO CE-TTSK 12 x 190	190	O							105
SITA ACCIAIO CE-TTSK 12 x 210	210	T							125
SITA ACCIAIO CE-TTSK 12 x 230	230	P							145
SITA ACCIAIO CE-TTSK 16 x 115	115	C	16	18	100	170	115	85	5
SITA ACCIAIO CE-TTSK 16 x 125	125	G							20
SITA ACCIAIO CE-TTSK 16 x 140	140	I							35
SITA ACCIAIO CE-TTSK 16 x 150	150	K							45
SITA ACCIAIO CE-TTSK 16 x 175	175	M							70
SITA ACCIAIO CE-TTSK 16 x 190	190	O							85
SITA ACCIAIO CE-TTSK 16 x 200	200	Q							95
SITA ACCIAIO CE-TTSK 20 x 130	130	C	20	22	180	200	135	100	5
SITA ACCIAIO CE-TTSK 20 x 160	160	E							35
SITA ACCIAIO CE-TTSK 20 x 200	200	G							75
SITA ACCIAIO CE-TTSK 20 x 215	215	I							90

(0) Total length of the bolt (mm)

(1) Nominal diameter of drill bit, d_{cut} (mm)(2) Diameter of clearance hole in the fixture, d_f (mm)(3) Required torque moment, T_{inst} (Nm)(4) Minimum thickness of concrete member, h_{min} (mm)(5) Depth of drilled hole to deepest point, h_1 (mm)(6) Effective anchorage depth, h_{ef} (mm)(7) Maximum thickness of the fixture, $t_{fix,maxi}$ (mm)

Non-cracked concrete only			M8	M10	M12	M16	M20
Effective anchorage depth	h_{ef}	(mm)	50	60	70	85	100
Minimum spacing	S_{min}	(mm)	50	60	70	85	100
Minimum edge distance	C_{min}	(mm)	60	70	85	100	120

SITA ACCIAIO CE-TTSK torque-controlled expansion anchor

Installation data

Annexe 4

à l'Agrément Technique
Européen
ETA-07/0067

Table 4: Characteristic values of resistance to tension loads of design method A

			M8	M10	M12	M16	M20
Steel failure							
Characteristic resistance	N _{RK,s}	(kN)	18,5	30,9	41,6	79,8	66,1
Partial safety factor	γ _{Ms}	-	1,53	1,53	1,53	1,64	2,0
Pull-through failure							
Characteristic resistance in non-cracked concrete C20/25	N _{RK,p}	(kN)	9	9	-	-	-
Partial safety factor in non-cracked concrete	γ ₂	-	1,0	1,0	-	-	-
	γ _{Mp}	-	1,5	1,5	-	-	-
Increasing factor for N _{RK} concrete C30/37	Ψ _c	-	1,22	-	-	-	-
Increasing factor for N _{RK} concrete C40/50			1,41	-	-	-	-
Increasing factor for N _{RK} concrete C50/60			1,55	-	-	-	-
Concrete cone failure							
Effective anchorage depth	h _{ef}	(mm)	50	60	70	85	100
Partial safety factor in non-cracked concrete	γ ₂	-	1,0	1,0	1,0	1,0	1,0
	γ _{Mc} = γ _{M,sp}	-	1,50	1,50	1,50	1,50	1,50
Increasing factor for N _{RK} concrete C30/37	Ψ _c	-	1,22	-	-	1,12	1,0
Increasing factor for N _{RK} concrete C40/50			1,41	-	-	1,23	1,0
Increasing factor for N _{RK} concrete C50/60			1,55	-	-	1,30	1,0
Spacing	s _{cr,N}	(mm)	150	180	210	255	300
	s _{cr,sp}	(mm)	300	360	420	510	600
Edge distance	c _{cr,N}	(mm)	75	90	105	130	150
	c _{cr,sp}	(mm)	150	180	210	255	300

Table 5: Displacements under tension loads

		M8	M10	M12	M16	M20
Tension load in non-cracked concrete C20/25 (kN)		4,3	4,3	11,2	15,1	15,9
Displacement	δ_{N0} (mm)	0,1	0,1	0,1	0,1	0,1
	$\delta_{N\infty}$ (mm)	1,3	1,3	1,3	1,3	1,3

		M8	M10	M12	M16	M20
Tension load in non-cracked concrete C50/60 (kN)		3,8	4,6	9,8	18,5	15,9
Displacement	δ_{N0} (mm)	0,5	0,5	0,5	0,5	0,1
	$\delta_{N\infty}$ (mm)	1,3	1,3	1,3	1,3	1,3

SITA ACCIAIO CE-TTSK torque-controlled expansion anchor

Design method A, characteristic values of resistance to tension loads; displacements

Annexe 5

à l'Agrément Technique Européen
ETA-07/0067

Table 6: Characteristic values of resistance to shear loads of design method A

			M8	M10	M12	M16	M20
Steel failure without lever arm							
Characteristic resistance	$V_{Rk,s}$	(kN)	9,3	16,6	26,1	47,9	42,7
Partial safety factor	γ_{Ms}	-	1,50	1,50	1,50	1,50	1,67
Steel failure with lever arm							
Characteristic resistance	$M_{Rk,s}^0$	(N.m)	23	46	81	203	260
Partial safety factor	γ_{Ms}	-	1,50	1,50	1,50	1,50	1,67
Concrete pry-out failure							
Factor in equation (5.6) of ETAG Annex C, § 5.2.3.3	k	-	1	2	2	2	2
Partial safety factor	γ_2	-	1,0	1,0	1,0	1,0	1,0
	γ_{Mc}	-	1,50	1,50	1,50	1,50	1,50
Concrete edge failure							
Effective length of anchor under shear loading							
	l_f	(mm)	50	60	70	85	100
Outside diameter of anchor	d_{nom}	(mm)	8	10	12	16	20
Partial safety factor	γ_{Mc}	-	1,50	1,50	1,50	1,50	1,50

Table 7: Displacements under shear loads

		M8	M10	M12	M16	M20
Shear load in non- cracked concrete C20/25 to C50/60 (kN)		3,7	6,6	10,4	15,0	22,4
Displacement	δ_{v0} (mm)	0,9 (+1,7)	1,6 (+1,7)	2,3 (+1,7)	3,4 (+1,7)	2,5 (+1,7)
	$\delta_{v\infty}$ (mm)	1,4 (+1,7)	2,4 (+1,7)	3,5 (+1,7)	5,1 (+1,7)	3,8 (+1,7)

Displacement: the table shows the deformation to be expected from the anchor itself, while the bracket value indicates the movement between the anchor body and the hole drilled in the concrete member or the hole in the fixture.

SITA ACCIAIO CE-TTSK torque-controlled expansion anchor

Design method A, characteristic values of resistance to shear loads; displacements

Annexe 6

à l'Agrément Technique Européen
ETA-07/0067

ETA-Danmark A/S
Kollegievej 6
DK-2920 Charlottenlund
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk



MEMBER OF EOTA

Authorised and notified according to Article 10 of the Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products

European Technical Approval ETA-10/0449

Trade name:

SITA ACCIAIO CE7 ANCHOR

Holder of approval:

G&B Fissaggi SRL
C. SO Savona 22
IT-10029 Villastellone - TO
Phone: +39 011 96 19 433
Fax: + 39 011 96 19 382
www.gebfissaggi.com

Generic type and use of construction product:

Torque-controlled expansion anchor for use in non-cracked concrete

Valid from:
to:

2010-11-15
2015-01-26

Manufacturing plant:

G&B Fissaggi SRL
Factory II

This European Technical Approval contains:

13 pages including 6 annexes which form an integral part of the document



European Organisation for Technical Approvals

Europæisk Organisation for Tekniske Godkendelser

I LEGAL BASIS AND GENERAL CONDITIONS

1 This European Technical Approval is issued by ETA-Danmark A/S in accordance with:

- Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, as amended by Council Directive 93/68/EEC of 22 July 1993².
- Bekendtgørelse 559 af 27-06-1994 (afløser bekendtgørelse 480 af 25-06-1991) om ikrafttræden af EF direktiv af 21. december 1988 om indbyrdes tilnærmelse af medlemsstaternes love og administrative bestemmelser om byggevarer.
- Common Procedural Rules for Requesting, Preparing and the Granting of European Technical Approvals set out in the Annex to Commission Decision 94/23/EC³.
- ETAG 001 - Guideline for European Technical Approval of metal anchors for use in concrete (June 1997) and Comprehension Document to ETAG n°001, final draft, doc N° 602 (September 2005).

2 ETA-Danmark A/S is authorized to check whether the provisions of this European Technical Approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European Technical Approval and for their fitness for the intended use remains with the holder of the European Technical Approval.

3 This European Technical Approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European Technical Approval.

4 This European Technical Approval may be withdrawn by ETA-Danmark A/S pursuant to Article 5(1) of Council Directive 89/106/EEC.

5 Reproduction of this European Technical Approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of ETA-Danmark A/S. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European Technical Approval.

6 This European Technical Approval is issued by ETA-Danmark A/S in Danish. This version corresponds fully to the version circulated within EOTA. Translations into other languages have to be designated as such.

1 Official Journal of the European Communities N° L40, 11 Feb 1989, p 12.

2 Official Journal of the European Communities N° L220, 30 Aug 1993, p 1.

3 Official Journal of the European Communities N° L 17, 20 Jan 1994, p 34.

II SPECIAL CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of product and intended use

The SITA ACCIAIO CE7 anchor in the range from M8 to M16 is an anchor made of steel, with one expansion cone, which is placed into a drilled hole and anchored by torque-controlled expansion. For the installed anchor see Figure given in Annex 1 to 2.

Intended use

The anchor is intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 of Council Directive 89/106/EEC shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences.

The anchor is to be used only for anchorages subject to static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength classes C20/25 minimum to C50/60 maximum according to EN 206-1:2000. It may be anchored in non-cracked concrete only, as established in ETAG001 Annex C point 4.

The anchor may only be used in concrete subject to dry internal conditions.

Assumed working life

The provisions made in this European Technical Approval are based on an assumed intended working life of the anchor of 50 years.

An “assumed intended working life” means that it is expected that, when this working life has elapsed, the real working life may be, in normal use conditions, considerably longer without major degradation affecting the essential requirements.

The indications given as to the working life of the boards cannot be interpreted as a guarantee given by G&B Fissaggi SRL or ETA-Danmark A/S.

2 Characteristics of product and assessment

2.1 Characteristics of product

The anchor in the range of M8 to M16 corresponds to the drawings given in the Annex 1. The characteristic material values, dimensions and tolerances of the anchor not indicated in Annexes 2 and 3 shall correspond to the respective values laid down in the technical documentation⁴ of this European Technical Approval. The characteristic anchor values for the design of anchorages are given in Annexes 4 and 5.

Each anchor is marked on the body with the name of the anchor CE7, the anchor diameter, the commercial name identifying producer, the nominal thread diameter and the length of the thickness of the fixing.

The anchor shall only be packaged and supplied as a complete unit.

2.2 Methods of verification

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 has been made in accordance with the « Guideline for European Technical Approval of Metal Anchors for use in Concrete », Part 1 « Anchors in general » and Part 2 « Torque-controlled expansion anchors », on the basis of Option 7.

In addition to the specific clauses relating to dangerous substances contained in this European technical approval, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products

Directive, these requirements need also to be complied with, when and where they apply.

⁴ The technical documentation of this European Technical Approval is deposited at ETA-Danmark and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies

3 Attestation of Conformity and CE marking

3.1 Attestation of Conformity system

The system of attestation of conformity 2 (i) (referred to as system 1) according to Council Directive 89/106/EEC Annex III laid down by the European Commission provides:

- a) tasks for the manufacturer:
 1. factory production control,
 2. further testing of samples taken at the factory by the manufacturer in accordance with a prescribed test plan.
- b) tasks for the notified body:
 3. initial type-testing of the product,
 4. initial inspection of factory and of factory production control,
 5. continuous surveillance, assessment and approval of factory production control.

3.2 Responsibilities

3.2.1 Tasks of the manufacturer

3.2.1.1 Factory production control

The manufacturer has a factory production control system in the plant and exercises permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures. This production control system ensures that the product is in conformity with the European Technical Approval.

The manufacturer shall only use raw materials supplied with the relevant inspection documents as laid down in the prescribed test plan⁵. The incoming raw materials shall be subject to controls and tests by the manufacturer before acceptance. Check of incoming materials such as nuts, washers, wire for bolts and sleeves shall include control of the inspection documents presented by suppliers (comparison with nominal values) by verifying dimension and determining material properties, e.g. tensile strength, hardness, surface finish.

The manufactured components of the anchor shall be subjected to the following tests:

- Dimensions of component parts:
 - Threaded rod (diameters, lengths, thread);

⁵ The prescribed test plan has been deposited at ETA-Danmark and is only made available to the approved bodies involved in the conformity attestation procedure.

Expansion Sleeve (length, thickness, catch sizes and marking);

Expansion cone (diameter, length, angle and roughness of the cone, thread);

Hexagon nut (proper running, wrench size across flats);

Washer (diameters, thickness)

- Material properties:

Threaded rod (yielding and ultimate tensile strengths, hardness),

Expansion sleeve (yielding and ultimate tensile strengths, hardness, roughness with the cone from M8 to M16);

Expansion cone (yielding and ultimate tensile strengths, hardness, roughness with the cone from M8 to M16);

Hexagonal nut (proof load);

Washer (hardness)

- Thickness of the zinc electroplated treatment of the elements.

- Visual control of correct assembly and of completeness of the anchor.

The frequency of controls and tests conducted during production and on the assembled anchor is laid down in the prescribed test plan taking account of the automated manufacturing process of the anchor.

The results of factory production control are recorded and evaluated. The records include at least the following information:

- designation of the product, basic material and components; type of control or testing;
- date of manufacture of the product and date of testing of the product or basic material and components;
- result of control and testing and, if appropriate, comparison with requirements;
- signature of person responsible for factory production control.

The records shall be presented to the inspection body during the continuous surveillance. On request, they shall be presented to ETA-Danmark

Details of the extent, nature and frequency of testing and controls to be performed within the factory production control shall correspond to the prescribed test plan which is part of the technical documentation of this European Technical Approval.

3.2.2. Tasks of notified bodies

3.2.2.1 Initial type testing of the product

For initial type testing the results of the tests performed as part of the assessment for the European Technical Approval shall be used unless there are changes in the production line or plant. In such cases the necessary initial type testing has to be agreed between ETA-Danmark and the notified body

3.2.2.2 Initial inspection of factory and of factory production control

The approved body shall ascertain that, in accordance with the prescribed test plan, the factory and the factory production control are suitable to ensure continuous and orderly manufacturing of the anchor according to the specifications mentioned in 2.1 as well as to the Annexes to the European Technical Approval.

3.2.2.3 Continuous surveillance

The approved body shall visit the factory at least once a year for regular inspection. It has to be verified that the system of factory production control and the specified automated manufacturing process are maintained taking account of the prescribed test plan.

Continuous surveillance and assessment of factory production control have to be performed according to the prescribed test plan.

The results of product certification and continuous surveillance shall be made available on demand by the certification body or inspection body, respectively, to ETA-Danmark. In cases where the provisions of the European Technical Approval and the prescribed test plan are no longer fulfilled the conformity certificate shall be withdrawn.

3.3 CE marking

The CE marking shall be affixed on each packaging of anchors. The symbol « CE » shall be accompanied by the following information:

- identification number of the certification body;
- name or identifying mark of the - producer and manufacturing plant;
- the last two digits of the year in which the CE-marking was affixed;
- number of the EC certificate of conformity;
- number of the European Technical Approval;
- use category (ETAG 001-1 option 7)
- anchor size

4 Assumptions under which the fitness of the product for the intended use was favourably assessed

4.1 Manufacturing

The anchor is manufactured in accordance with the provisions of the European Technical Approval using the automated manufacturing process as identified during inspection of the plant by ETA-Danmark and the approved body and laid down in the technical documentation.

4.2 Installation

4.2.1 Design of anchorages

The fitness of the anchors for the intended use is given under the following conditions:

The anchorages are designed in accordance with the « Guideline for European Technical Approval of Metal Anchors for Use in Concrete », Annex C, Method A, for torque-controlled expansion anchors under the responsibility of an engineer experienced in the specific field. The choice of partial safety factors is a responsibility of the Designer, taking into account the specific local installation situations and the technical regulations valid in the member States, considering that those fixed in this ETA are minimum values.

Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.

The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to support, etc.).

4.2.2 Installation of anchors

The fitness for use of the anchor can only be assumed if the anchor is installed as follows:

- anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on the site;
- use of the anchor only as supplied by the manufacturer without exchanging the components of an anchor;
- anchor installation in accordance with the manufacturer's specifications and drawings prepared for that purpose and using the appropriate tools;
- thickness of the fixture corresponding to the

range of required thickness values for the type of anchor;

- checks before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply;
- check of concrete being well compacted, e.g. without significant voids;
- clearing the hole of drilling dust;
- anchor installation ensuring the specified embedment depth: embedment depth control;
- keeping of the edge distance and spacing to the specified values without minus tolerances;
- positioning of the drill holes without damaging the reinforcement;
- in case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not to the anchor in the direction of load application;
- application of the torque moment given in Annex 2 using a calibrated torque wrench.

4.2.3 Responsibility of the manufacturer

It is the manufacturer's responsibility to ensure that the information on the specific conditions according to 1 and 2 including Annexes referred to in 4.2.1. and 4.2.2. is given to those who are concerned. This information may be made by reproduction of the respective parts of the European Technical Approval. In addition all installation data shall be shown clearly on the package and/or on an enclosed instruction sheet, preferably using illustration(s).

The minimum data required are:

- drill bit diameter,
- thread diameter,
- maximum thickness of the fixture,
- minimum installation depth, minimum hole depth,
- required torque moment,
- information on the installation procedure, including cleaning of the hole, preferably by means of an illustration,
- reference to any special installation equipment needed,
- identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.

Thomas Bruun
Manager, ETA-Danmark

Assembled anchor:


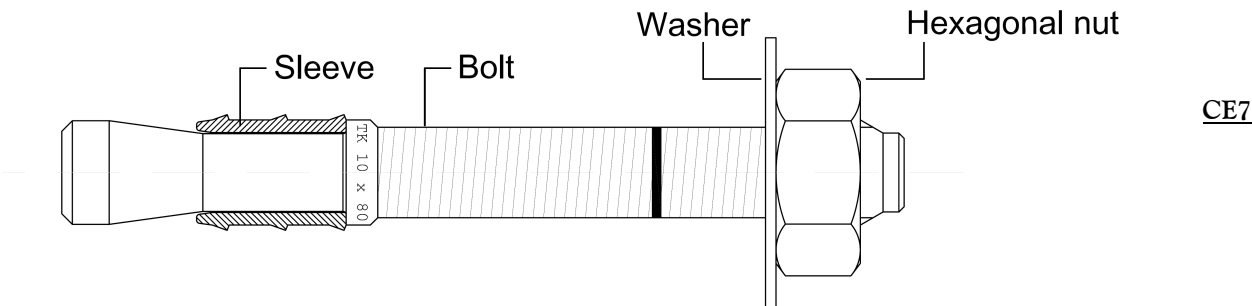


Illustration of the anchor in use

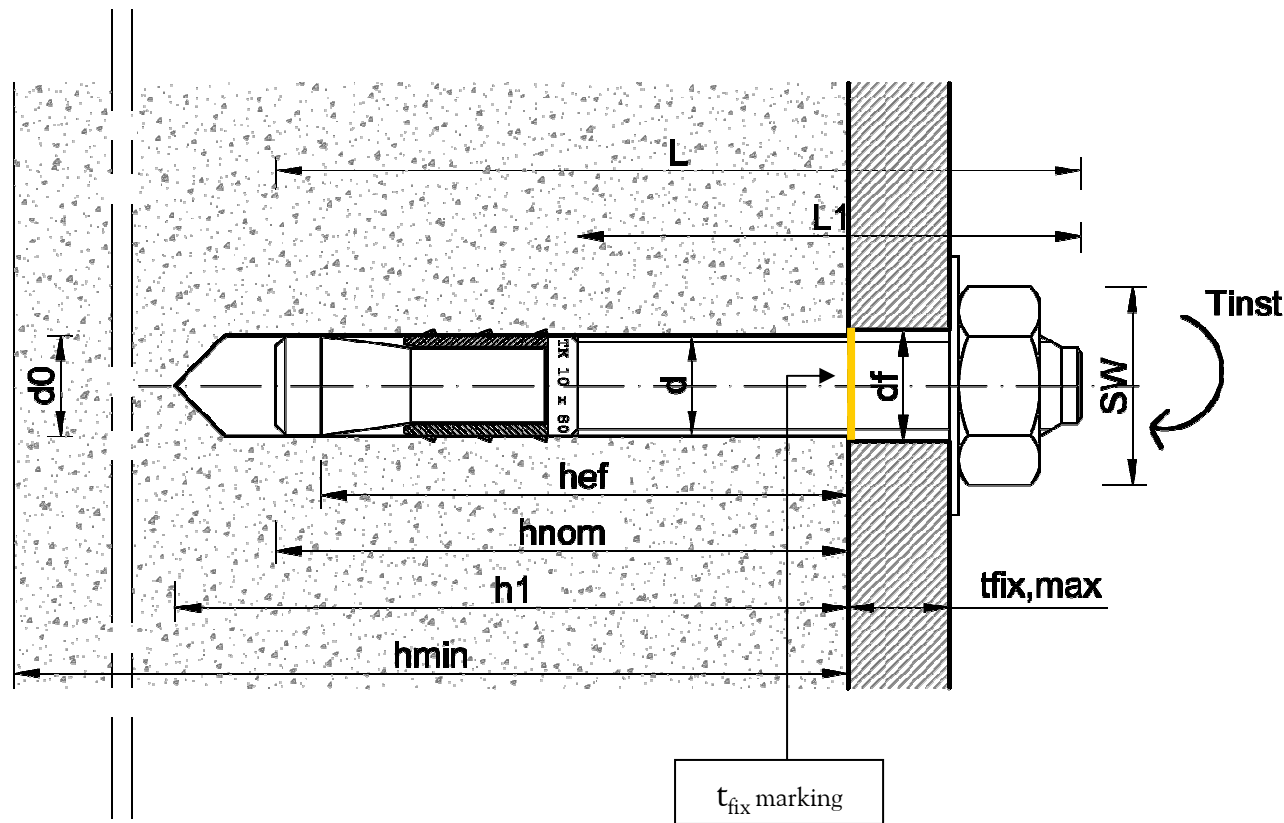

CE7 ANCHOR torque-controlled expansion anchor

Product and intended use

Annex 1

of European Technical Approval
ETA-10/0449


Dimensions and data for the installation of the anchors

External Diameter	d_o	[mm]	8	10	12	16
Screw Diameter	d	[mm]	8	10	12	16
Screw Length	L	[mm]	75-90-115	80-90-100-120	100-110-140-160 180-200-220-240 260-280-300-330-360	125-145-175-220 240-260-280-300 330-360-400
Effective length	h_{ef}	[mm]	51	55.5	75	92.8
Fixture thickness	t_{fix}	[mm]	10-20-45	10-20-30-50	5-15-45-65-85 105-125-145-165 185-205-235-250	10-30-60-105-125 145-165-185-215 245-280
CE7 Anchor body	$A_{s,red}$ Reduced Section	[mm ²]	26.4	43.0	59.4	103.9
	A_s Threaded section	[mm ²]	36.6	58.0	84.3	157.0
	f_{uk}	[N/mm ²]	500	500	500	500
	f_{yk}	[N/mm ²]	400	400	400	400
Minimum distances	s_{min}	[mm]	48	60	72	96
	c_{min}	[mm]	64	80	96	128
	h_{min}	[mm]	110	120	160	200

Anchor	Nominal diameter of the drill bit [mm]	Minimum thickness of the concrete h_{min} [mm]	Depth of the drilled hole h_1 [mm]	Setting depth h_{nom} [mm]	Effective anchorage depth h_{ef} [mm]	Diameter of the hole in the fixture d_f [mm]	Max fixture thickness T_{fix} [mm]	Tightening torque T_{inst} [Nm]	SW [mm]
M8	8	110	65	55	51.0	9	45	15	13
M10	10	120	70	60	55.5	11	50	30	17
M12	12	160	95	80	75.0	14	250	50	19
M16	16	200	120	100	92.8	18	280	100	24

CE7 ANCHOR torque-controlled expansion anchor	Annex 2
Anchor dimensions and parameter of installation	of European Technical Approval ETA- 10/0449

Marking system

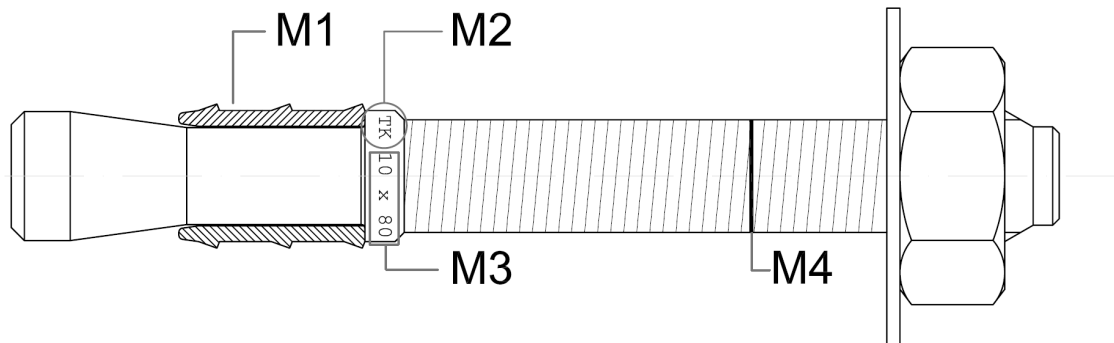

Marking 1 (On the body of the expansion sleeve)	TK 10	Producer identifying mark and anchor diameter
Marking 2 (On the body of the anchor)	TK	Producer identifying mark and name of the anchor
Marking 3 (On the body of the anchor)	10 x 80	Nominal thread diameter x length of the anchor body
Marking 4 (On the thread of the anchor)	thread incision	t_{fix} length

Materials

Component	Manufacturing process	Standard	Steel class	Coating
Sleeve	Press-forming	-	AISI 304	-
Washer	Cutting	ISO 7093 EN10111	5.8	UNI ISO 2081 Fe/Zn 7 zincplated
Hexagonal Nut	Cold forming	ISO 898 - 2	6	UNI ISO 2081 ISO 4042 Fe/Zn 7 zincplated
Bolt	Machined	ISO 898-1	5.8	UNI ISO 2081 ISO 4042 Fe/Zn 7 zincplated

CE7 ANCHOR torque-controlled expansion anchor	Annex 3
Marking and materials	of European Technical Approval ETA- 10/0449

Design Method A:
Characteristic strength value and safety coefficients for tension loads

			M8	M10	M12	M16
Steel failure	$N_{RK,S}$	[kN]	13.2	21.5	29.7	51.9
	$\gamma_{MS}^{(1)}$	-	1.50	1.50	1.50	1.50
	$N_{RK,S}/\gamma_{MS}$	[kN]	8.8	14.3	19.8	34.6
Pull-out failure	$N_{RK,P}$ C20/25	[kN]	7.5	9.0	12.0	25.0
	γ_2	-	1.00	1.00	1.00	1.20
	$\gamma_{MP}^{(2)}$	-	1.50	1.50	1.50	1.80
	$N_{RK,P}/\gamma_{MP}$	[kN]	5.0	6.0	8.0	13.9
	Ψ_c C30	-	1.22			
	Ψ_c C40	-	1.41			
	Ψ_c C50	-	1.55			
Critical distances	$s_{cr,N}$	[mm]	144	180	210	270
	$c_{cr,N}$	[mm]	72	90	105	135
	$s_{cr,sp}$	[mm]	144	180	210	270
	$c_{cr,sp}$	[mm]	72	90	105	135
Tension load	$N^{(3)}$	[kN]	3.6	4.3	5.7	9.9
Displacements	δ_{N0}	[mm]	0.02	0.03	0.04	0.07
	$\delta_{N\infty}$	[mm]	-	-	0.33	-
⁽¹⁾ In absence of national regulations ⁽²⁾ In absence of national regulations $\gamma_{MP} = \gamma_{MC} = \gamma_c * \gamma_1 * \gamma_2$ with: $\gamma_1 = 1.0$ and $\gamma_c = 1.5$ ⁽³⁾ The load N is evaluated according to point 6.1.2.2.8 ETAG 001 - part 1						

CE7 ANCHOR torque-controlled expansion anchor	Annex 4
Design Method A, characteristic values for tension loads and displacements	of European Technical Approval ETA- 10/0449

Design Method A:
Characteristic strength value and safety coefficients for shear loads
For sizes M8, M10, M12 with lengths up to 180 mm and M16 with lengths up to 220 mm

			M8	M10	M12	M16
Steel failure without lever arm	$V_{Rk,s}$	[kN]	6.6	10.1	21.1	39.3
	$\gamma_{MS}^{(1)}$	-	1.25	1.25	1.25	1.25
	$V_{Rk,s}/\gamma_{MS}$	[kN]	5.3	8.1	16.9	31.4
Steel failure with lever arm	$M_{Rk,s}^0$	[Nm]	18.7	37.4	65.4	166.0
	$\gamma_{MS}^{(1)}$	-	1.25	1.25	1.25	1.25
	$M_{Rk,s}/\gamma_{MS}$	[Nm]	15.0	29.9	52.3	132.8
Concrete edge failure	l_f	[mm]	51	56	75	93
	d_{nom}	[mm]	8	10	12	16
	$\gamma_{Mc}^{(2)}$	-	1.50	1.50	1.50	1.80
Pry-out failure	k	-	1	1	2	2
	$\gamma_{Mc}^{(2)}$	-	1.5	1.5	1.5	1.80
Shear load	$V^{(3)}$	[kN]	3.8	5.8	12.0	22.4
Displacements	δ_{V0}	[mm]	2.4	3.4	3.6	3.7
	$\delta_{V\infty}$	[mm]	3.6	5.1	5.4	5.5
⁽¹⁾ In absence of national regulations ⁽²⁾ In absence of national regulations $\gamma_{Mc} = \gamma_c * \gamma_1 * \gamma_2$ with: $\gamma_1 = 1.0$ and $\gamma_c = 1.5$ ⁽³⁾ The load N is evaluated according to point 6.1.2.2.8 ETAG 001 - part 1						

CE7 ANCHOR torque-controlled expansion anchor	Annex 5 of European Technical Approval ETA- 10/0449
Design Method A, characteristic values for shear loads and displacements	

Design Method A:
Characteristic strength value and safety coefficients for shear loads
For sizes M12 with lengths up to 360 mm and M16 with lengths up to 400 mm

			M12	M16
Steel failure without lever arm	$V_{Rk,s}$	[kN]	8.8	13.5
	$\gamma_{MS}^{(1)}$	-	1.25	1.25
	$V_{Rk,s}/\gamma_{MS}$	[kN]	7.0	10.8
Steel failure with lever arm	$M_{Rk,s}^0$	[Nm]	65.4	166.0
	$\gamma_{MS}^{(1)}$	-	1.25	1.25
	$M_{Rk,s}/\gamma_{MS}$	[Nm]	52.3	132.8
Concrete edge failure	lf	[mm]	75	93
	d_{nom}	[mm]	12	16
	$\gamma_{Mc}^{(2)}$	-	1.50	1.80
Pry-out failure	k	-	2	2
	$\gamma_{Mc}^{(2)}$	-	1.5	1.8
Shear load	$V^{(3)}$	[kN]	4.2	5.4
Displacements	δ_{V0}	[mm]	5.0	4.7
	$\delta_{V\infty}$	[mm]	7.5	7.1
⁽¹⁾ In absence of national regulations ⁽²⁾ In absence of national regulations $\gamma_{Mc} = \gamma_c * \gamma_1 * \gamma_2$ with: $\gamma_1 = 1.0$ and $\gamma_c = 1.5$ ⁽³⁾ The load V is evaluated according to point 6.1.2.2.8 ETAG 001 - part 1				

CE7 ANCHOR torque-controlled expansion anchor	Annex 6 of European Technical Approval ETA- 10/0449
Design Method A, characteristic values for shear loads and displacements	