

SEAL SQUARE


Adhesive sealing element, preshaped for internal use

Hydrorepellant impregnated paper support, acrylic glue and separation layer



VERSATILE

Ideal for all small internal sealing tasks that require speed and precision



PRACTICAL

Precut, requires no equipment for working and installation



TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	DIN EN 1942	approx. 0.30 mm
Tear strength	DIN EN 14410	> 70 N/cm
Expansion capacity	DIN EN 14410	> 5 %
Adhesiveness	DIN EN 1939	> 15 N/cm
Water vapour transmission (Sd)	EN 1931	6 m
Temperature resistance	-	-40 / +100 °C
Application temperature	-	> -10 °C
Storage temperature	-	+15 / +30 °C
Solvents	-	NO
VOC emissions	-	0 % (class A+)

NOTE: Store the product in a dry, covered location





CODES AND DIMENSIONS




code	ex code	B [mm]	L [m]	pcs/box	pcs/roll
SEAL180	D52220	180 x 180	36	1	200

COMPOSITION

- ① **support:** hydrorepellant impregnated paper
- ② **glue:** acrylate dispersion without solvents
- ③ **separation layer:** silicone paper

SEAL BAND INSTALLATION INSTRUCTIONS - INTERNAL WINDOW DETAIL

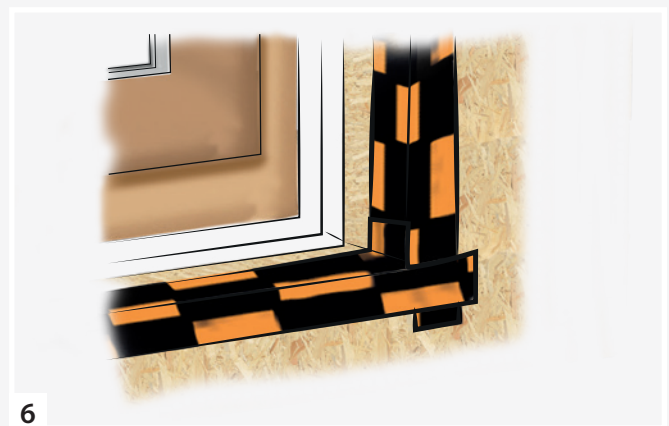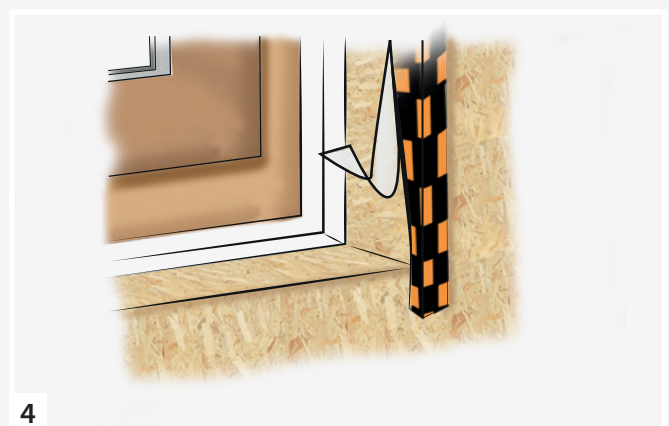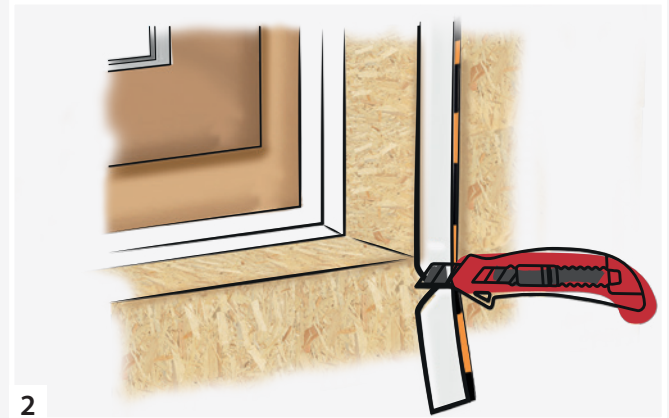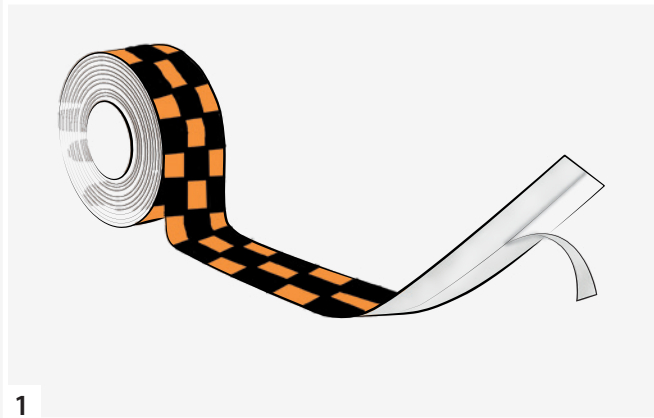

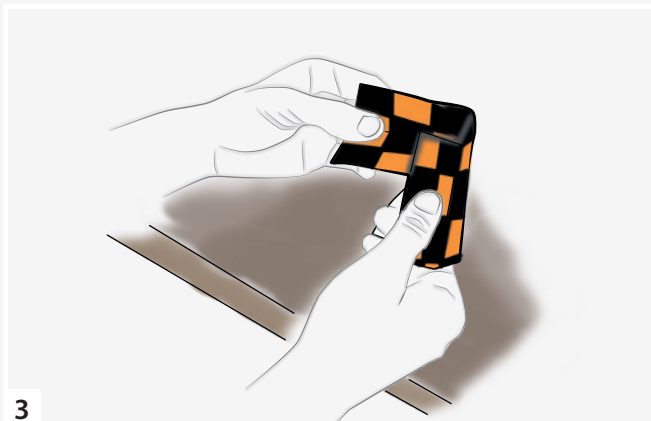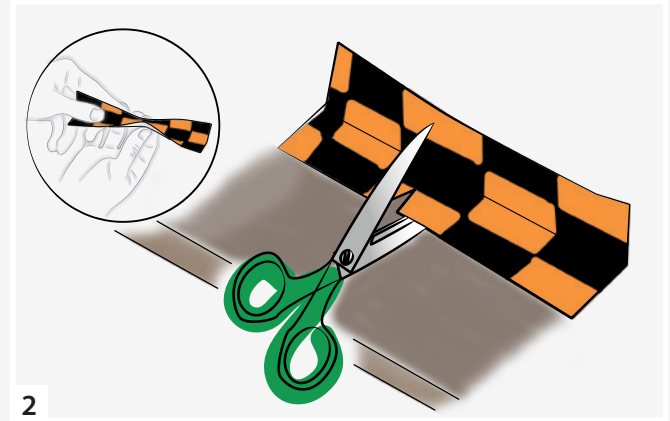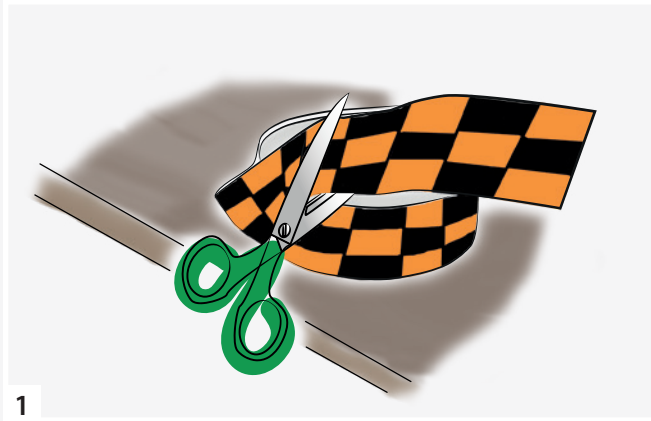SEAL BAND INSTALLATION INSTRUCTIONS - CORNER DETAIL**SEAL BAND INSTALLATION INSTRUCTIONS - BEAM DETAIL**