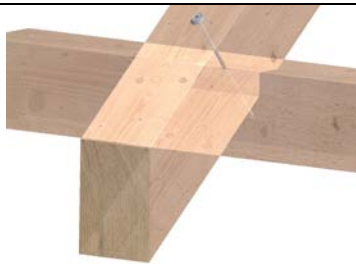
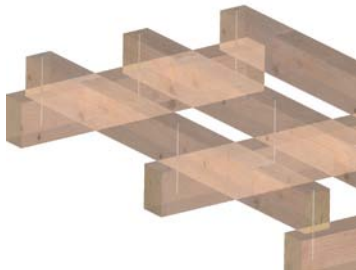


Specifications:

Spec. n.	Description	Unit of measurement	Price per unit	Total price
1	PARTIALLY THREADED WOOD SCREWS WITH COUNTERSUNK HEAD: Supply and installation, as provided for in the technical drawings of the project, of partially threaded wood screws with countersunk head, with diameter $\varnothing = \dots$ mm and length $L = \dots$ mm, HBS SCREWS produced and marketed by Rotho Blaas srl (www.rothoblaas.com), having the following characteristics: - steel with $f_{u,k} \geq 1000 \text{ N/mm}^2$ - galvanic zinc with minimum thickness $12 \mu\text{m}$ with coating in Cr^{3+} - CE marking for construction products in accordance with Directive 89/106/EEC, in accordance with EN 14592:2008 - approval granted by the German Institute for Building Technology (<i>Deutsches Institut für Bautechnik</i>) Besides the screws, the user must be in possession of a perforating point, thread-end cutter, surface waxing, countersunk head with underhead ribbing, head indicating the length of the screw and trademark. Installation can be performed without a pilot hole in the conifer wood, by means of screwdrivers equipped with suitable torsional coupling, avoiding use of "impact screwdrivers." These indications are given in order to perform supply and installation to the best working standards. 	each	... €/each	... €
2	PARTIALLY THREADED WOOD SCREWS AND COUNTERSUNK HEAD WITH TURNED WASHERS: Supply and installation, as provided for in the technical drawings of the project, of partially threaded wood screws with countersunk head, with diameter $\varnothing = \dots$ mm and length $L = \dots$ mm, HBS SCREWS supplied with turned washers (to increase resistance to head penetration), HUS WASHERS produced and marketed by Rotho Blaas srl (www.rothoblaas.com), having the following characteristics: - steel with $f_{u,k} \geq 1000 \text{ N/mm}^2$ - galvanic zinc with minimum thickness $12 \mu\text{m}$ with coating in Cr^{3+} - CE marking for construction products in accordance with Directive 89/106/EEC, in			

	accordance with EN 14592:2008 - approval granted by the German Institute for Building Technology (<i>Deutsches Institut für Bautechnik</i>) Besides the screws, the user must be in possession of a perforating point, thread-end cutter, surface waxing, countersunk head with underhead ribbing, head indicating the length of the screw and trademark. Installation can be performed without a pilot hole in the conifer wood, by means of screwdrivers equipped with suitable torsional coupling, avoiding use of "impact screwdrivers." These indications are given in order to perform supply and installation to the best working standards. 	each	... €/each	... €
3	"SHEARING" JUNCTION BY MEANS OF PARTIALLY THREADED WOOD SCREWS WITH COUNTERSUNK HEAD: Supply and installation, as provided for in the technical drawings of the project, of a retractable junction for connecting wood components, built with N = ... partially threaded wood screws with countersunk head, arranged for absorption of shearing stress, with diameter Ø = ... mm and length L = ... mm, HBS SCREWS produced and marketed by Rotho Blaas srl (www.rothoblaas.com), having the following characteristics: - steel with $f_{u,k} \geq 1000 \text{ N/mm}^2$ - galvanic zinc with minimum thickness 12 µm with coating in Cr³⁺ - CE marking for construction products in accordance with Directive 89/106/EEC, in accordance with EN 14592:2008 - approval granted by the German Institute for Building Technology (<i>Deutsches Institut für Bautechnik</i>) Besides the screws, the user must be in possession of a perforating point, thread-end cutter, surface waxing, countersunk head with underhead ribbing, head indicating the length of the screw and trademark. Installation can be performed without a pilot hole in the conifer wood, by means of screwdrivers equipped with suitable torsional coupling, avoiding use of "impact screwdrivers." These indications are given in order to perform supply and installation to the best working standards.	each	... €/each	... €

				
4	X-LAM PANEL JUNCTION BY MEANS OF PARTIALLY THREADED WOOD SCREWS WITH COUNTERSUNK HEAD: Supply and installation, as provided for in the technical drawings of the project, of a retractable junction for connecting X-LAM panels of wooden structure buildings (longitudinal panel-panel junction, floor-wall junction, corner junction between two wall panels, etc.) built with N = ... (per metre) partially threaded wood screws with countersunk head, with diameter $\varnothing = \dots$ mm and length L = ... mm, with inter-axis between screws I = ... mm, HBS SCREWS produced and marketed by Rotho Blaas srl (www.rothoblaas.com), having the following characteristics: - steel with $f_{u,k} \geq 1000 \text{ N/mm}^2$ - galvanic zinc with minimum thickness 12 μm with coating in Cr^{3+} - CE marking for construction products in accordance with Directive 89/106/EEC, in accordance with EN 14592:2008 - approval granted by the German Institute for Building Technology (Deutsches Institut für Bautechnik) Besides the screws, the user must be in possession of a perforating point, thread-end cutter, surface waxing, countersunk head with underhead ribbing, head indicating the length of the screw and trademark. Installation can be performed without a pilot hole in the conifer wood, by means of screwdrivers equipped with suitable torsional coupling, avoiding use of "impact screwdrivers." These indications are given in order to perform supply and installation to the best working standards. 	ml	... €/ml	... €