

MANICA

SEALING SLEEVE WITH SHRINK TUBING AND CLAMP

WATERPROOF


Sleeve, heat shrink tubing and metal clamp ensure waterproofing.

EFFECTIVE

The three models with a base of slated bituminous concrete, PVC and FPO/PP make it possible to choose the most suitable base for the roofing sheath.


STRONG

The materials are weather-resistant, stabilised against UV radiation, resistant to high and low temperatures, oxidation and ageing.

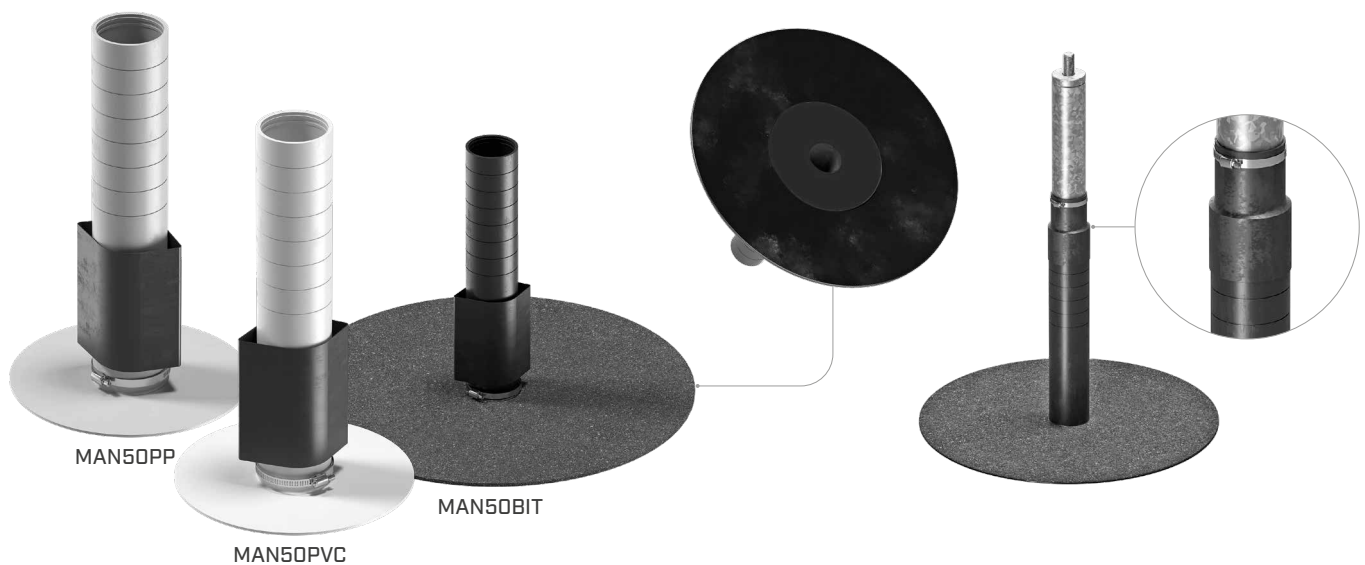

CODES AND DIMENSIONS

CODE	description	material	d ₁ [mm]	d ₂ [mm]	H [mm]	s ₁ [mm]	s ₂ [mm]	pcs
MAN50BIT	sealing sleeve with shrink tubing and clamp	PVC; slated bituminous	50	430	210	3	4	1
MAN50PVC	sealing sleeve with shrink tubing and clamp	PVC	50	180	300	3	2	1
MAN50PP	sealing sleeve with shrink tubing and clamp	FPO/PP	50	180	300	3	2	1




RELATED PRODUCTS



TOWER
SUPPORT FOR TIMBER,
CONCRETE AND STEEL
ROOFS



TOWER A2
ANCHOR POINT FOR
TIMBER, CONCRETE AND
STEEL ROOFS

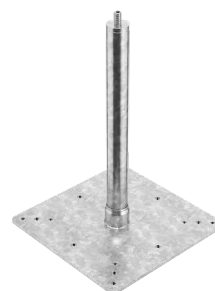

TOWER XL
SUPPORT FOR LIFELINE
ON CLT, CONCRETE AND
HOLLOW CORE CONCRETE
ROOFS

Find out more at www.rothoblaas.com.