

AOS01 + SEAMO

ANCHOR POINT FOR ROUND SEAM METAL ROOFS

SIMPLE

Fastened to the seam with four clamps, without the need to make openings in the sheet metal.

ROBUST




Fixed on two round crimps for improved resistance.



LOAD DIRECTION



TYPES OF APPLICATION

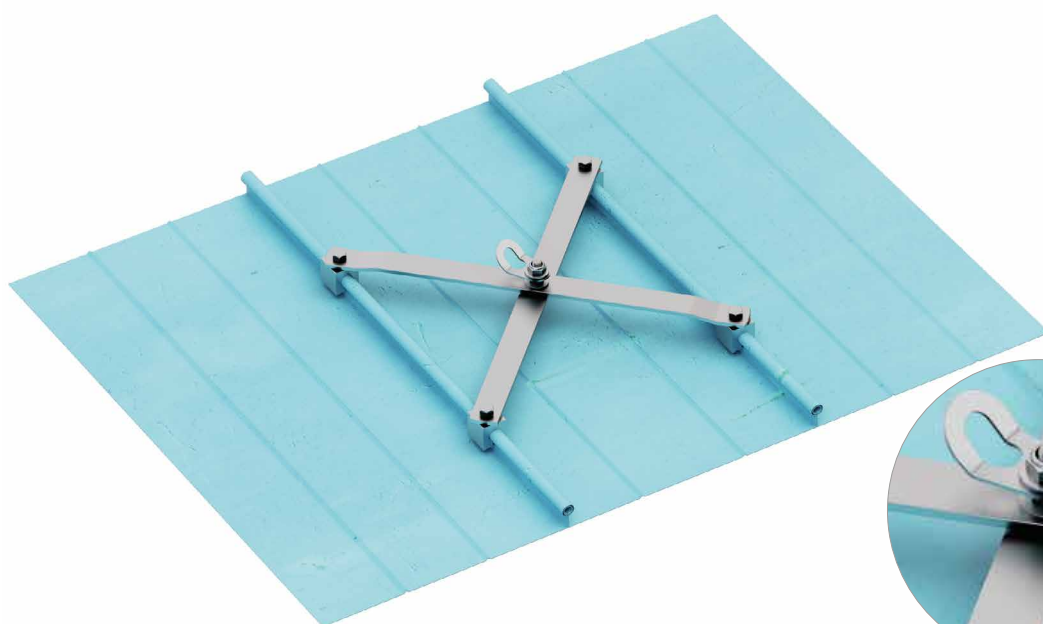

TECHNICAL DATA*


substructure	minimum thickness
 Fe ALUFALZ, INTERFALZ, BEMO ROOF, KALZIP	0,6 mm

substructure	minimum thickness
 Al ALUFALZ, INTERFALZ, BEMO ROOF, KALZIP	0,8 mm

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

SEAMO | CODES AND DIMENSIONS

A2
AISI 304

CODE	material	B [mm]	H [mm]	L [mm]	pcs	
SEAMO	AISI 304 stainless steel grade 1.4301	305-500	-	-	1	
AOS01	AISI 304 stainless steel grade 1.4301	60	-	98	1	