

SUPPORT FOR ANCHOR LINE WITH BALLAST

FLAT ROOFS

Designed for flat roofs with inclines up to 5°.

OPTIMISED SUPPLY

The system is provided in a compact and practical package that is easy to transport.



CODES AND DIMENSIONS

CODE	material	r [mm]	pcs.
BLOCK	stainless steel 1.4301 - AISI304	940	1

Cement slab (500 x 500 mm) for ballast not included in the package.
Mats included in the box.



< UNOBTRUSIVE


Installation does not require drilling the roof, which is not altered.

VERSATILE >

Offers installation on both a pass-through and non-pass through anchor line.




SURFACE INCLINATION

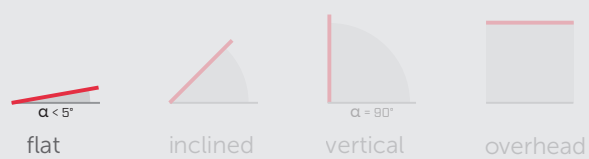







FIELD OF USE

- Non-drillable flat roof
- Green roof

GEOMETRY

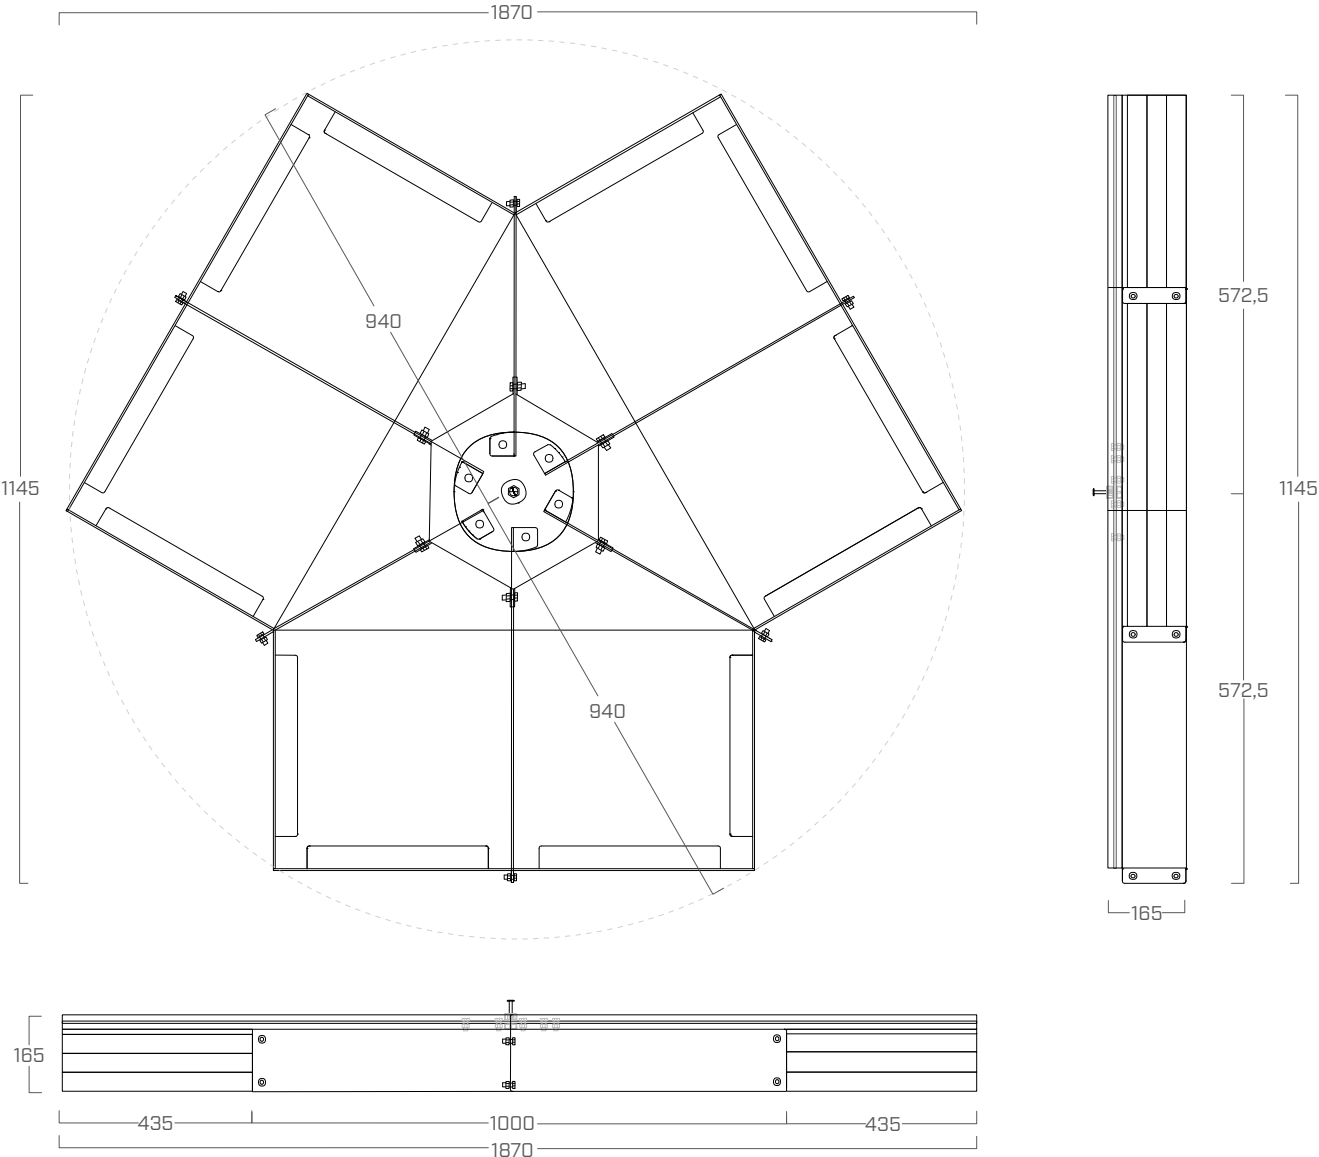


APPLICATION INSTRUCTIONS

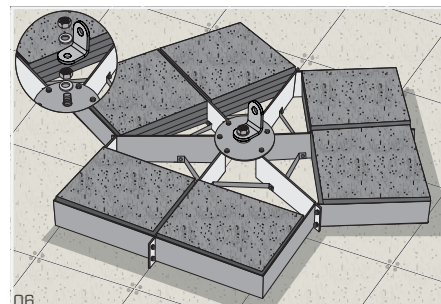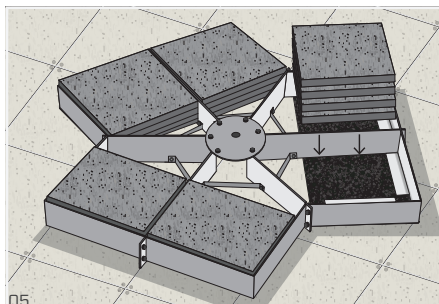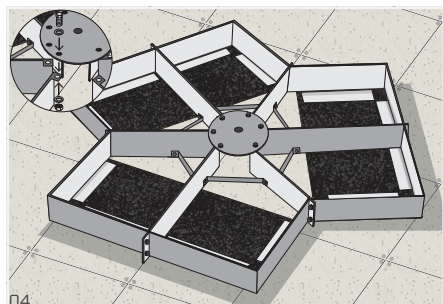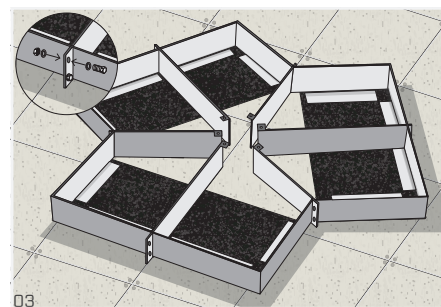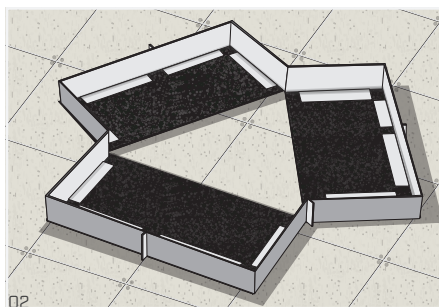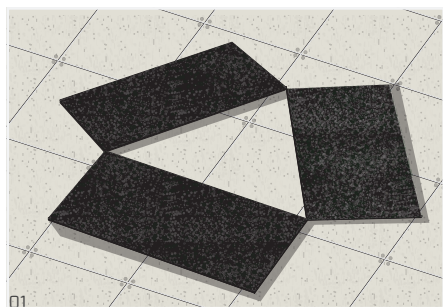

For more information about product installation, please see the corresponding manual.

TECHNICAL DATA

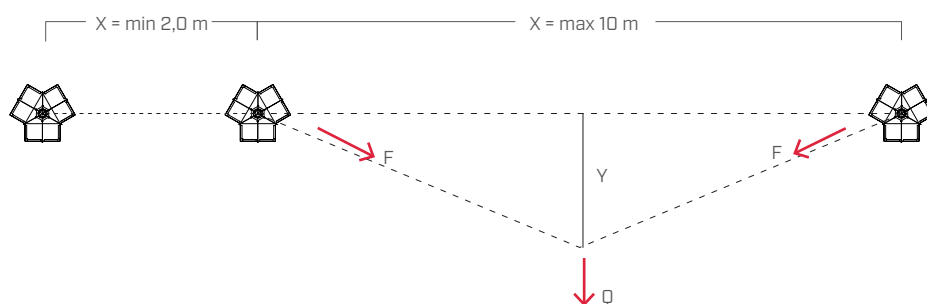

LABORATORY STRENGTHS

Data	Standard	Value
Q_s	EN 795:2012 CEN/TS 16415:2013	13 kN
Q_{d1}	EN 795:2012 CEN/TS 16415:2013	12 kN

