

CHIMNEY CONNECTION

ALU FLASH CONNECT

ALUMINIUM AND SELF-ADHESIVE BUTYL VERSION



- Butyl adhesive adheres perfectly, creating a durable watertight seal
- It can be cut with a cutter or scissors
- Excellent UV and weather resistance

CODE	B [mm]	s [mm]	L [m]	B [in]	s [mil]	L [ft]	coating	colour	RAL	
ALURRED300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	brick red	8004	1
ALURBRO300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	brown	8019	1
ALURBLA300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	black	9004	1

Waste classification (2014/955/EU): 17 09 04.

SOFT FLASH CONNECT

EPDM AND BUTYL SELF-ADHESIVE VERSION



- Permanent UV stability
- Extremely flexible 3D surface
- It can be modelled by hand without special tools


CODE	B [mm]	s [mm]	L [m]	B [in]	s [mil]	L [ft]	coating	colour	RAL	
SOFTRED300 ⁽¹⁾	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	brick red	8004	1
SOFTBRO300 ⁽¹⁾	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	brown	8019	1
SOFTBLA300 ⁽¹⁾	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	black	9004	1

⁽¹⁾Products available only upon order.

Waste classification (2014/955/EU): 17 02 03.

MANICA ROLL

SELF-ADHESIVE LEAD AND BUTYL VERSION

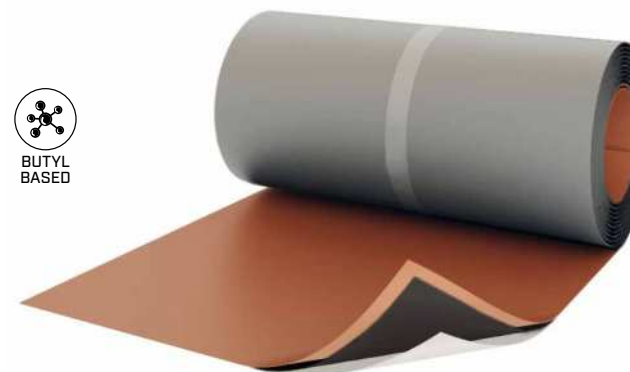

- Smooth, perfectly malleable surface
- Permanent UV stability
- Excellent weather resistance

CODE	B [mm]	s [mm]	L [m]	B [in]	s [mil]	L [ft]	coating	colour	RAL	
MANROLL1	300	1,5	5	11.8	59	16.40	lead 0,5 mm	brick red	8004	1
MANROLL2	300	1,5	5	11.8	59	16.40	lead 0,5 mm	brown	8017	1
MANROLL3	300	1,5	5	11.8	59	16.40	lead 0,5 mm	dark brown	8019	1
MANROLL4	300	1,5	5	11.8	59	16.40	lead 0,5 mm	black	9005	1
MANROLL5	300	1,5	5	11.8	59	16.40	lead 0,5 mm	graphite	7016	1

Avoid contact with skin, eyes and food. Do not produce and breathe dust.

RECOMMENDATIONS FOR INSTALLATION



ADAPTABLE

The special adhesive butyl mix offers strong adherence, even on rough surfaces.

MATERIAL

Aluminium, EPDM and lead guarantee durability.