

PEAK HOOK


BLOKIRNI KAVELJ ZA GLADKE IN UKRIVLJENE STREŠNE OPEKE

HITRA SUHOMONTAŽNA VGRADNJA

Za vgradnjo slemena brez montažne pene ali malte, v skladu s standardom UNI 9460.

CELOTNA IZBIRA

Na voljo v različnih izvedbah in barvah, tako da jo lahko prilagodite različnim vrstam strešnih kritin.

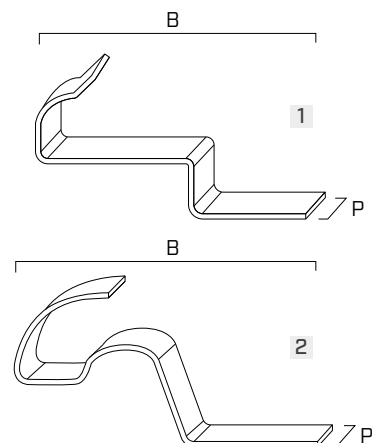

KODE IN DIMENZIJE

KODA		B	P	B	P	verzija	material	barva	RAL	
		[mm]	[mm]	[in]	[in]					
1	PUNIRED	115	18	4.5	0.7	univerzalen	aluminij	opečnato rdeča	8004	50
	PUNIBRO	115	18	4.5	0.7	univerzalen	aluminij	rjava	8017	50
	PUNIAN	115	18	4.5	0.7	univerzalen	aluminij	antracit	7021	50
2	PCURRED	80	18	3.2	0.7	ukrivljen	aluminij	opečnato rdeča	8004	50
	PCURBRO	80	18	3.2	0.7	ukrivljen	aluminij	rjava	8017	50
	PCURANT ⁽¹⁾	80	18	3.2	0.7	ukrivljen	aluminij	antracit	7021	50

⁽¹⁾ Izdelke je na voljo samo po naročilu.

 Razvrstitev odpadka (2014/955/EU): 17 04 02.

NASVETI ZA VGRADNJO

