

TERMI FLOOR



NEPROPUSNA MEMEBRANA ZA TEMELJE SA ZAŠTITOM OD TERMITA

SASTAV

- 1 jedan sloj: film od materijala PE niske gustoće



TEHNIČKI PODATCI


Svojstvo	norma	vrijednost	USC units
Gramatura	EN 1849-2	150 g/m ²	0.49 oz/ft ²
Debljine	EN 1849-1	0,15 mm	6 mil
Otpornost na vlak MD/CD	EN 12311-1	10/10 N/10 mm	5.7/5.7 lbf/in
Istezanje MD/CD	EN 12311-1	200/50 %	–
Otpornost na cijepanje čavla, MD/CD	EN 12310-1	40/40 N	9/9 lbf
Otpornost na statičko opterećenje	–	5 N	1.12 lbf
Otpornost na udare	EN 12691	200 mm	7.87 in
Vodonepropusnost	EN 1928	sukladno	–
Vodonepropusnost			
– u prisutnosti alkalija	EN 1847/EN 1928	sukladno	–
– nakon umjetnog starenja	EN 1296/EN 1928	sukladno	–
Reakcija na požar	EN 13501-1	razred F	–
Otpornost na temperaturu	–	-40/80 °C	-40/176 °F
Otpornost na prolazak zraka	EN 12114	< 0,02 m ³ /(m ² h50Pa)	< 0.001 cfm/ft ² at 50Pa
Toplinska vodljivost (λ)	–	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specifična toplota	–	1800 J/(kg·K)	–
Gustoća	–	oko 1000 kg/m ³	oko 62 lbm/ft ³
Djelovanje protiv termita	FCBA (401/10/222F/d)	> 20 godina	–

Razvrstavanje otpada (2014/955/EU): 17 02 04.

KODOVI I DIMENZIJE

KOD	roll [m]	H [m]	L [m]	A [m ²]	H [ft]	L [ft]	A [ft ²]	
TERMI150	1,0 x 12,5	3	25	75	10	82	807	48

SAVJETI ZA POLAGANJE

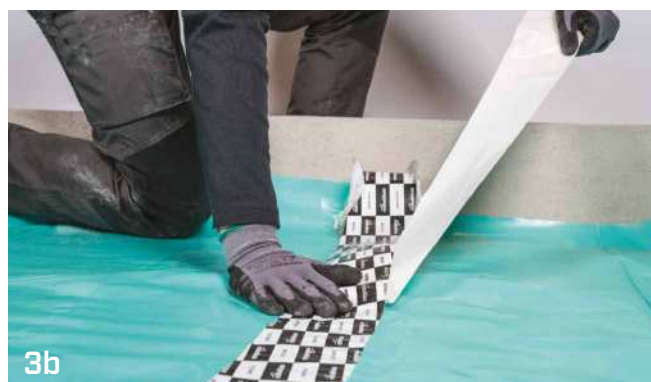

3a SUPRA BAND, BUTYL BAND, OUTSIDE GLUE

3b ROTHOBLAAS TAPE

4a OUTSIDE GLUE, SUPRA BAND, BUTYL BAND
FLY, FLY SOFT

4b PRIMER, PRIMER SPRAY
ROLLER