


DRYWALL SCREW

OPTIMISED GEOMETRY

Bugle head and phosphate-coated steel; ideal for fastening sheets of drywall.

FULLY FINE THREADED

Fully fine threaded screw, ideal for fastening on sheet metal supports.

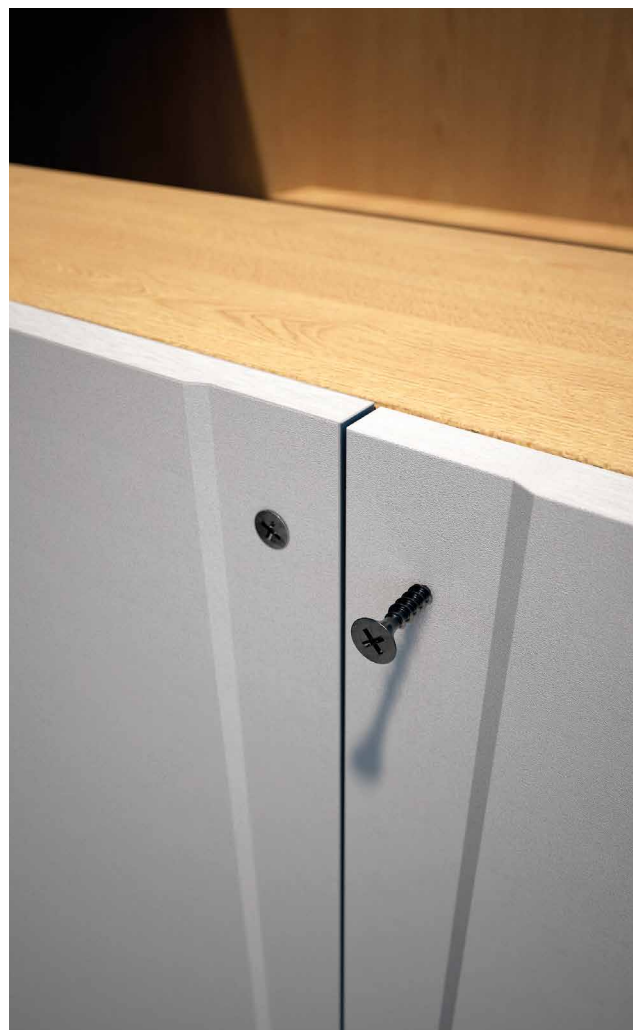


CODES AND DIMENSIONS

DWS - bulk screws



d ₁ [mm]	CODE	L [mm]	description	pcs
3,5 PH 2	FE620001	25	sheet metal substructure	1000
	FE620005	35		1000
	FE620010	45		500
	FE620015	55		500
4,2 PH 2	FE620020	65	sheet metal substructure	200


DWS STRIP - bound screws



d ₁ [mm]	CODE	L [mm]	description	pcs
3,9 PH 2	HH10600404	30	timber substructure	10000
	HH10600405	35		10000
	HH10600406	45		10000
3,9 PH 2	HH10600401	30	sheet-metal substructure max 0,75	10000
	HH10600402	35		10000
	HH10600403	45		10000
3,9 PH 2	HH10600397	30	fermacell	10000
	HH10600398	35		10000

Compatible with nailgun HH3371, see page 405.

GEOMETRY



DIAMETER [mm]

3,5 (3,5 4) 12

LENGTH [mm]

25 (25 65) 200

SERVICE CLASS

SC1

ATMOSPHERIC CORROSIVITY

C1

WOOD CORROSIVITY

T1

MATERIAL



phosphate-coated carbon steel