

# LOOP

## ANCHOR POINT FOR TIMBER AND CONCRETE SUBSTRUCTURE

### LOW PROFILE


Under-tile fastening ensures a low visual impact, ideal for installation on roofs in historic centres.

### FAST

Fast and easy installation, with just two HBS Ø8 screws.

### ADAPTABLE

Thanks to its KRAKEN support, it can also be installed on thin concrete roofs.

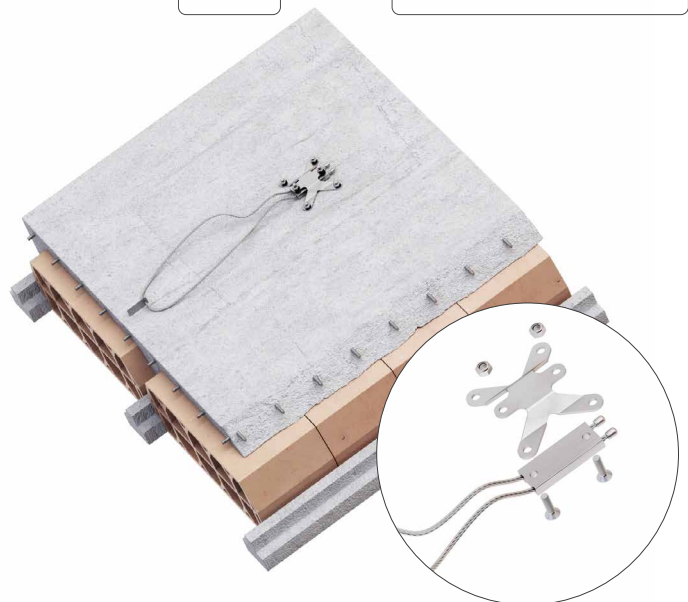

EN 795:2012 A  
UNI 11578:2015 A



MAXIMUM NUMBER OF USERS



LOAD DIRECTION



TYPES OF APPLICATION



## TECHNICAL DATA\*

substructure	minimum thickness	fasteners
GL24h	100 x 100 mm	HBS Ø8

\* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standards referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

substructure	minimum thickness	fastening + KRAKEN
C20/25	100 mm	M8 5.8 rod + ULS + MUT VIN-FIX HYB-FIX

## CODES AND DIMENSIONS

CODE	material		B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
LOOP	AISI 316 stainless steel grade 1.4401 / EN AW 6060 T6	A4 AISI 316	-	12 1/2	456 17 15/16	1	
LOOPXL	AISI 316 stainless steel grade 1.4401 / EN AW 6060 T6	A4 AISI 316	-	12 1/2	756 29 3/4	1	
KRAKEN	AISI 430 stainless steel grade 1.4016 IIA	430 AISI	100 4	18 11/16	116 4 9/16	1	

CODE	description	page	CODE	description	page
MULTIPLATE	universal counterplate	253	MULTIBEF	fastening set for MULTIPLATE	254
OMEGA	accessory for MULTIPLATE	253			