

I HORIZONTAL NET

HORIZONTAL POLYPROPYLENE FALL PROTECTION SAFETY NET

SAFE

Fastener spacing optimised to 2,5m to ensure product safety and rapid installation.

MODULAR

Possibility of joining several nets together using HORCONNECT sewing rope to cover larger areas.

CAN BE PERSONALIZED

Also available in other colours on request (red, blue, white) and in personalised formats for specific net sizes.


EN
1283-1
Tipo S



▼ Installation of temporary polypropylene fall protection nets for securing a timber roof under construction.



■ FIELDS OF APPLICATION

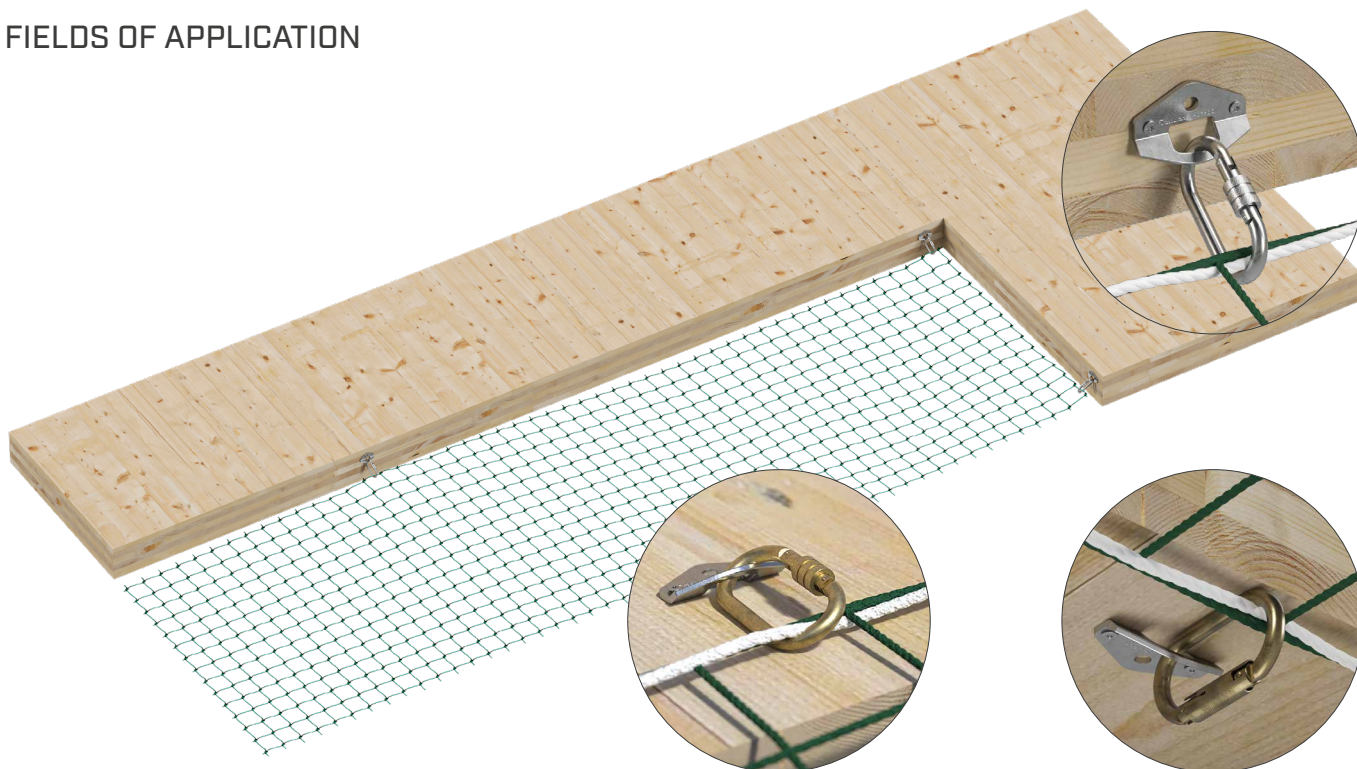

■ CODES AND DIMENSIONS

CODE	B		L		mesh		rope		weight	pcs
	[m]	[ft]	[m]	[ft]	[mm]	[in]	[mm]	[in]	[kg]	
HOR510	5	16 4 7/8	10	32 9 3/4	100	4	Ø5	Ø0.2	11,4	1
HOR610	6	19 8 1/4	10	32 9 3/4	100	4	Ø5	Ø0.2	13,7	1
HOR7515	7,5	24 7 1/4	15	49 2 1/2	100	4	Ø5	Ø0.2	25,7	1
HOR1010	10	32 9 3/4	10	32 9 3/4	100	4	Ø5	Ø0.2	22,9	1

COMPLEMENTARY PRODUCTS

CODE	standard	description	dimensions [mm]	weight [g]	<> [kN]	^ v [kN]	pcs	
HORHOOK(*)	-	base plate for net hooking	52 x 80 x 4	-	-	-	1	
CARSCREW	CE-EN362/B	connector with screwgate	-	160	25	7	1	
CARTWIST	CE-EN362/B	connector with "Twist-Lock" gate	-	173	20	7	1	
HORHOOKC(*)	-	net hook for concrete	M10 x 110	-	-	-	1	
HORHOOKS(*)	-	net hook for steel	M12 x 130	-	-	-	1	
HORFIX	-	fastening cord per linear metre	Ø14	-	-	-	1	
HORCONNECT	-	sewing cord per linear metre	Ø6	-	-	-	1	

FASTENING FOR HORHOOK

substructure	fasteners [mm]	pcs	substructure	fasteners [mm]	pcs	substructure	fasteners [mm]	pcs
timber	HBS Ø6	2	concrete	AB1 / AB7 Ø10	1	steel	EKS M10 + ULS + MUT	1
				SKR-CE Ø10	1			
				VIN-FIX Ø10	1			

(*) Recommended fastening every 2,5 m.