

CPL

IZOLACIJSKA KAPA OD LAKIRANOG LIMA S BRTVOM OD PE-a

VODONEPROPUSNOST

Izolacijska kapa od lakiranog ugljičnog čelika s brtvom od PE-a za vodonepropusno zatvaranje limom.

Verzija 40 x 50 mm od aluminija.

KOMPLETAN ASORTIMAN

Potpun raspon mjera za kompatibilnost s različitim dimenzijama valovitog lima u ponudi na tržištu.


ESTETIKA

U ponudi u raznim bojama radi prilagodbe na svaki estetski zahtjev krovova.




KODOVI I DIMENZIJE

RAL 9005 - bijela sivkasta




KOD	C	A	L	B	kom.
	[mm]	[mm]	[mm]	[mm]	
CPLW1528	15	28	50	16	50
CPLW2036	20	36	50	16	50
CPLW2534	25	34	50	16	50
CPLW3040	30	40	50	16	50
CPLW4050	40	50	50	16	50

RAL 3009 - sijenska crvena




KOD	C	A	L	B	kom.
	[mm]	[mm]	[mm]	[mm]	
CPLR1528	15	28	50	16	50
CPLR2036	20	36	50	16	50
CPLR2534	25	34	50	16	50
CPLR3040	30	40	50	16	50
CPLR4050	40	50	50	16	50

RAL 8017 - tamnosmeđa



KOD	C	A	L	B	kom.
	[mm]	[mm]	[mm]	[mm]	
CPLB1528	15	28	50	16	50
CPLB2036	20	36	50	16	50
CPLB2534	25	34	50	16	50
CPLB3040	30	40	50	16	50
CPLB4050	40	50	50	16	50

GEOMETRIJA

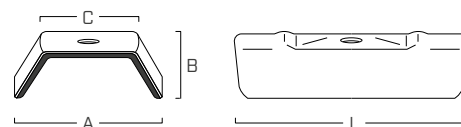

UPORABNA KLASA



ATMOSFERSKA KOROZIJA



MATERIJAL



lakiranog ugljičnog čelika



polietilen