

I PATROL + COPPO

LIFELINE ON SUPPORT FOR ROOFS WITH FAUX TILES

COMPLETE

The package includes fasteners and cellular rubber gaskets, to ensure roof waterproofing.

ADAPTABLE

Pre-drilled plate with holes at different distances to suit various types of sheet metal.

FAST

Quick assembly upon the completion of roofing with just a few tools.

EN
795:2012
C

CEN/TS
18415:2013

UNI
11578:2015
C




MAXIMUM NUMBER
OF USERS




LOAD DIRECTION



TYPES OF
APPLICATION



PATROL LIFELINE COMPONENTS

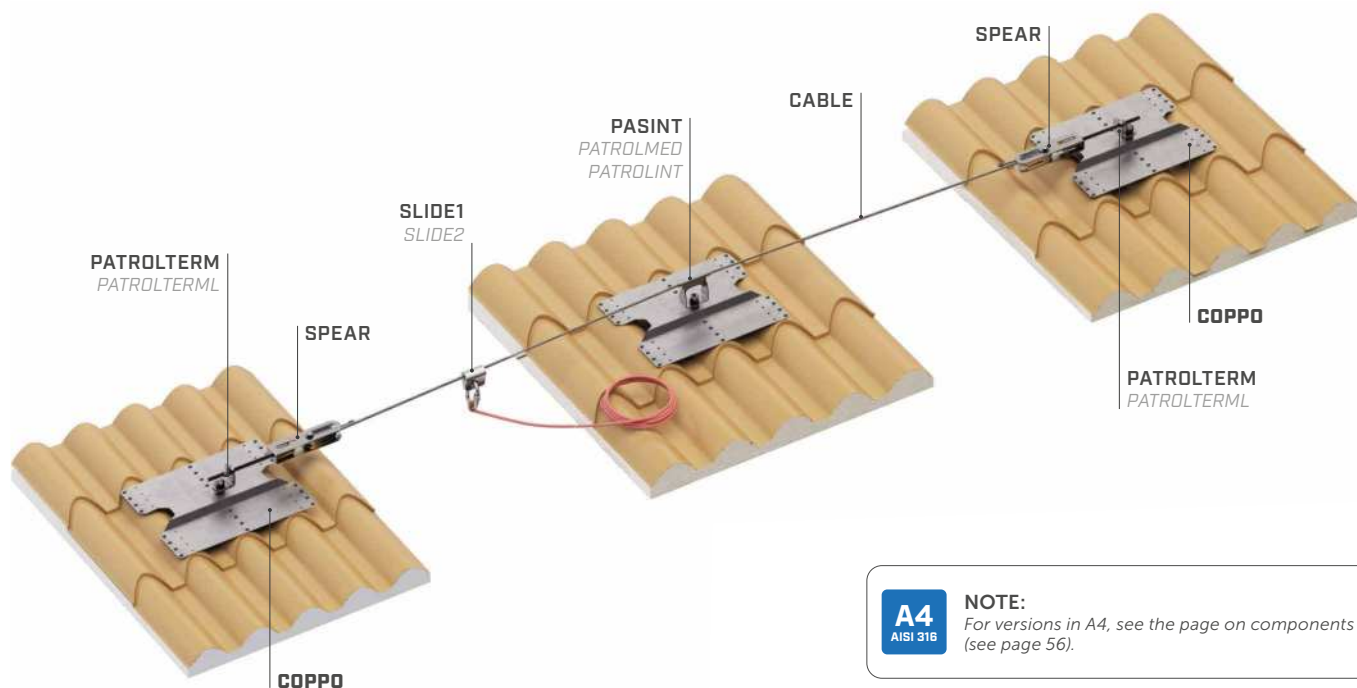


A4
AISI 316

NOTE:

For versions in A4, see the page on components (see page 56).

TECHNICAL DATA*

substructure	minimum thickness	fastening systems included
 Fe	0,5 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 24) 
 Al	0,7 mm	

			SPEAR		
			EN 795:2012 C	CEN/TS 18415:2013	UNI 11578:2015 C
users		no.			
minimum span	x_{min}	[m]	2		
maximum span	x_{max}	[m]	7,5		
maximum deflection	y_{max}	[m]	1,44		

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

COPPO | CODES AND DIMENSIONS

CODE	description	material		B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
COPPO	support for faux tile roofing panel	AISI 304 stainless steel grade 1.4301	A2 AISI 304	166 - 200 6 9/16 - 8	65 2 9/16	322 12 11/16	1	