

AOSWS

ANCHOR POINT FOR WORK AT HEIGHT

UNIVERSAL


It can be used both for the safety rope in rope access work, and for fall protection works.

FUNCTIONAL

Compact with anchor point up to three users.

VERSATILE

Certified for use on different substructures and with different fastening systems.

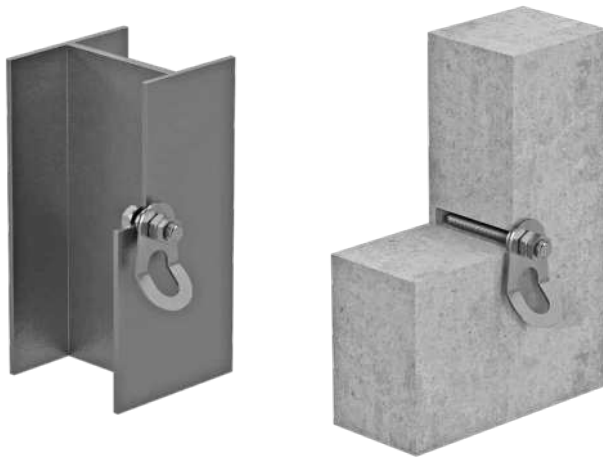

EN 795:2012 A	CEN/TS 18418:2013	UNI 11578:2015 A
---------------------	----------------------	------------------------




**MAXIMUM NUMBER
OF USERS**



LOAD DIRECTION



**TYPES OF
APPLICATION**




TECHNICAL DATA*

substructure	minimum thickness	substructure	minimum thickness	fasteners
 S235JR	5 mm	 C20/25	170 mm	AB1/ABEA4 VIN-FIX 

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

CODES AND DIMENSIONS

CODE	material		d ₁ [mm] [in]	B [mm] [in]	L [mm] [in]	pcs	
AOSWS	AISI 304 stainless steel grade 1.4301		17 0.67	60 2 3/8	98 3 7/8	1	
AOSWSA4	AISI 316 stainless steel grade 1.4401		17 0.67	60 2 3/8	98 3 7/8	1	