

GREEN POINT




ANCHOR POINT WITH BALLASTS

FAST INSTALLATION

The system consists of few components which facilitate and speeds up mounting.

FUNCTIONAL

Support system which does not require the roofing to be penetrated, thereby preventing thermal bridging and ensuring the structure waterproofing.

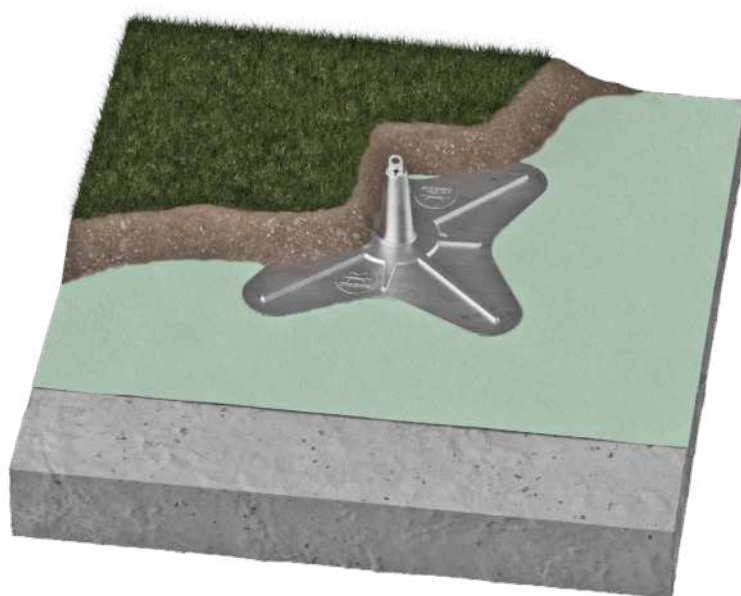

> 80 kg/m ²	> 200 kg/m ²	> 200 kg/m ²
EN 795:2012 A	UNI 11578:2015 A	CEN/TS 18415:2013



MAXIMUM NUMBER
OF USERS



LOAD DIRECTION



TYPES OF
APPLICATION




TECHNICAL DATA*

no. of operators	dimensions	material weight	total weight
	standard tarpaulin dimensions 3x3 m VLF non-woven geotextile	for ballast > 80 kg/m ²	for each pole = 720 kg
	standard tarpaulin dimensions 3x3 m VLF non-woven geotextile	for ballast > 200 kg/m ²	for each pole = 1800 kg

* They are based on measurements from various test institutes and measurement laboratories. We reserve the right to make technical changes.

CODES AND DIMENSIONS

CODE	description	material		d ₁ [mm] [in]	B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
GREENPOINT	anchor point internal element	AISI 316L stainless steel grade 1.4404		250 9.85	- -	300 11 3/4	- -	1	
GREENCARPET	tarpaulin with possibility of installing ballasts 3x3 m with external cone	glass fibre reinforced plastic		- -	3000 118 1/8	- -	3000 118 1/8	1	