

MOBILE

MOBILE ANCHOR POINT



EN
785 - B


REMOVABLE

It can be assembled and disassembled easily and quickly, to safely ensure access.

FUNCTIONAL

It can be installed on doors, windows and inclined skylights, with no structural damage.

MAXIMUM NUMBER
OF USERS

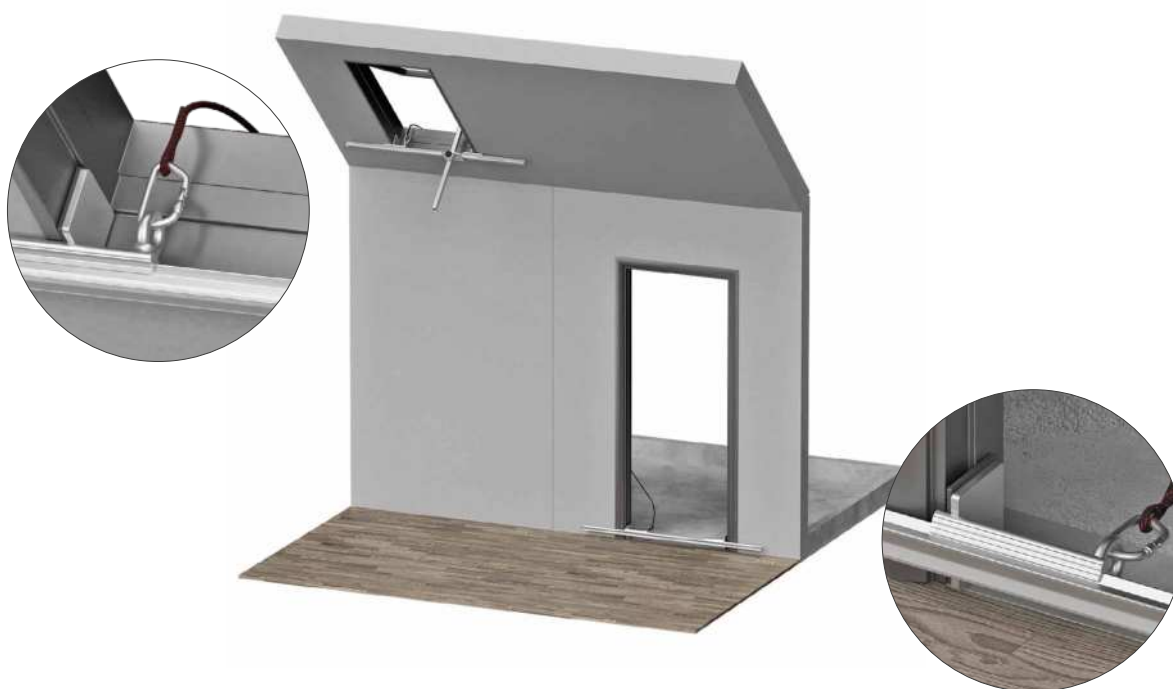

CODES AND DIMENSIONS

CODE	material		L [mm] [in]	B [mm] [in]	H [mm] [in]	weight [kg]	pcs
MOBILE	EE30 aluminium	alu EE30	1450 57 1/16	770 30 5/16	175 6 7/8	6,7	1

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

APPLICATION

