

SLIDING ANCHOR FOR STEEL STRUCTURES

FUNCTIONAL

Thanks to the integrated rollers, the device slides smoothly along the entire steel structure.

SIMPLE

Quick and easy to install anchor on steel beams with different widths, from 65 to 120 mm.

EN
795 - B




MAXIMUM NUMBER
OF USERS




LOAD DIRECTION



TYPES OF
APPLICATION

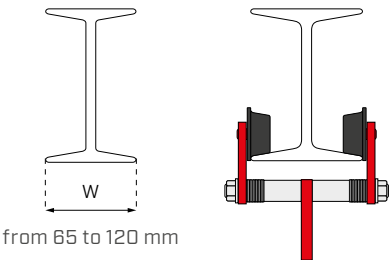

from 65 to 120 mm

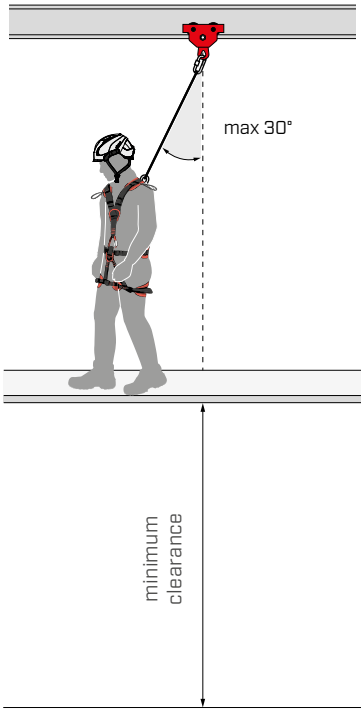

CODES AND DIMENSIONS

CODE	material	dimensions [mm] [in]	B [mm] [in]	H [mm] [in]	weight [kg]	pcs
CARRIER	zinc plated steel	195 x 176 x 212 7 11/16 x 6 15/16 x 8 3/8	65-120 2 9/16-4 3/4	60 2 3/8	5,2	1

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.