

# PINCER TIP


## ROOF CLAMP

- The large stop surface makes it easier to insert the tips and guarantees maximum stability
- Thanks to the special movable pressure plate, it can also be used in oblique position
- Tightening torque of up to 12,0 kN | 2700 lbf



### CODES AND DIMENSIONS

| CODE     | opening (a)<br>[mm]<br>[in] | scrapping (c)<br>[mm]<br>[in] | profile (x)<br>[mm]<br>[in] | weight<br>[kg]<br>[lbs] | pcs |
|----------|-----------------------------|-------------------------------|-----------------------------|-------------------------|-----|
| PINTIP60 | 600<br>23 5/8               | 120<br>4 3/4                  | 27 x 13<br>1 1/16 x 1/2     | 2,9<br>6.4              | 1   |
| PINTIP80 | 800<br>31 1/2               | 140<br>5 1/2                  | 30 x 15<br>1 3/16 x 9/16    | 5,0<br>11               | 1   |

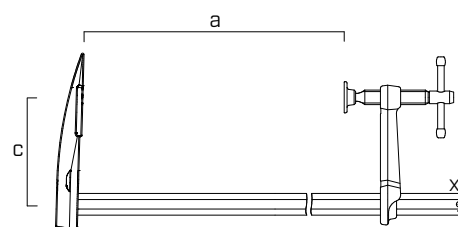

# GRIZZLY

## UNIVERSAL PANEL HOLDER

- Suitable for transportation of panels made of timber, OSB, MDF, non-lubricated metal, plastic, plasterboard and other materials
- Capacity up to 100 kg | 220 lbs each handle



GRIZZLY55



GRIZZLY80



GRIZZLY110



### CODES AND DIMENSIONS

| CODE       | opening     |                  | pcs |
|------------|-------------|------------------|-----|
| GRIZZLY55  | 0 - 55 mm   | 0 - 2 3/16"      | 2   |
| GRIZZLY80  | 30 - 80 mm  | 1 3/16" - 3 1/8" | 2   |
| GRIZZLY110 | 60 - 110 mm | 2 3/8" - 4 3/8"  | 2   |

### COMPLEMENTARY PRODUCTS - ACCESSORIES

| CODE      | description                                 | pcs |
|-----------|---------------------------------------------|-----|
| GRIZZLYSP | 1 pair of spare jaws for all GRIZZLY models | 2   |