


JIG VGZ 45°


TEMPLATE FOR 45° SCREW CONNECTIONS

- Its shape allows an easy and fast screwing of any type of screw with a precise inclination of 45°
- Thanks to the markings, many typical timber construction connections, both single and double, can easily be made without wasting time on long measurements

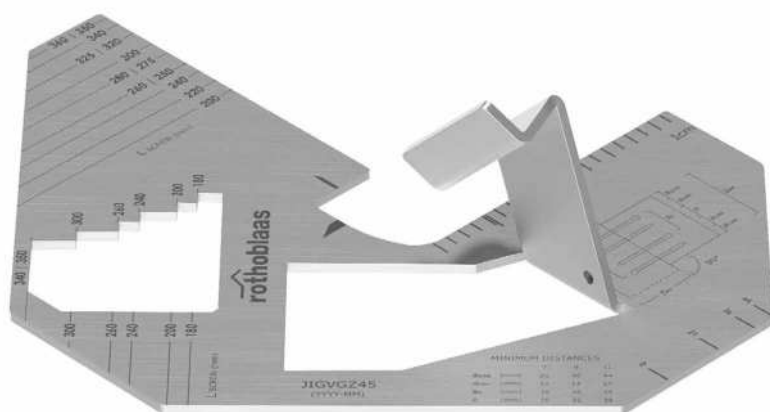



VIDEO

Scan the QR Code and watch the video on our YouTube channel



CODES AND DIMENSIONS

CODE	B	L	H	B	L	s	pcs
	[mm]	[mm]	[mm]	[in]	[in]	[in]	
JIGVGZ45	210	253	67	8 1/4	9 15/16	2 5/8	1

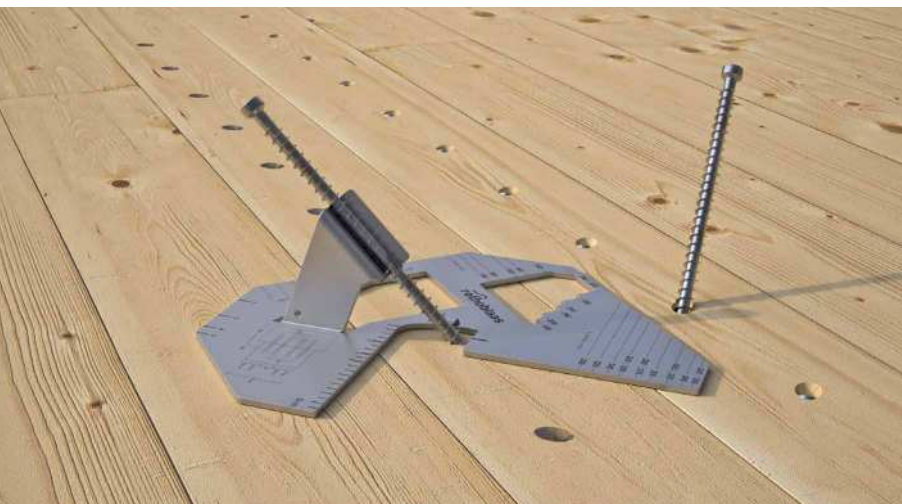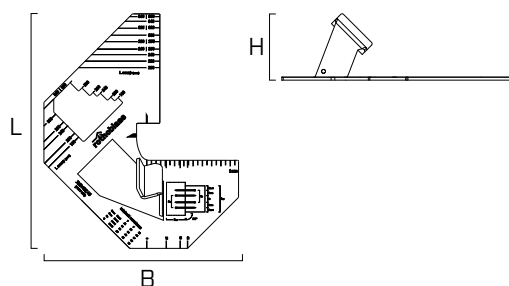

MATERIAL

The template is made of 3 mm stainless steel and is therefore a long-lasting accessory.


FIELDS OF USE

Timber-to-timber joints at 45° for beams and floors


- solid timber
- CLT and LVL
- CTC screw, timber-to-concrete

INSTRUCTIONS FOR ASSEMBLY


SCREW TIP POSITION

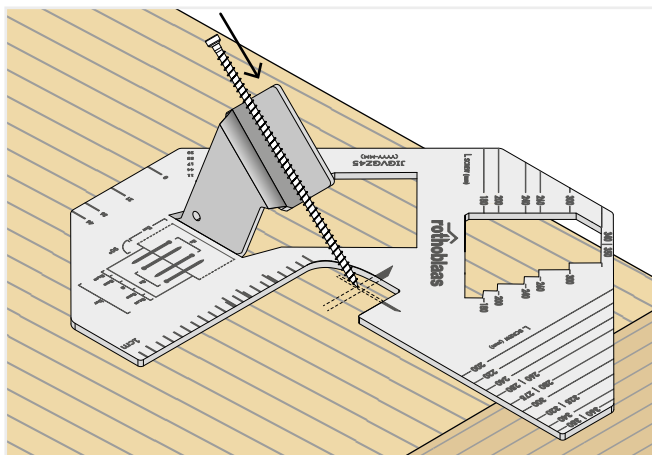


MAIN-BEAM-SECONDARY BEAM JOINT

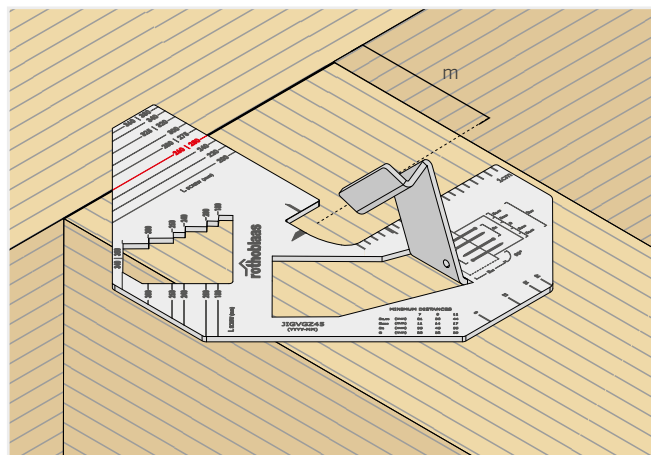


MINIMUM DISTANCE FROM THE EDGE

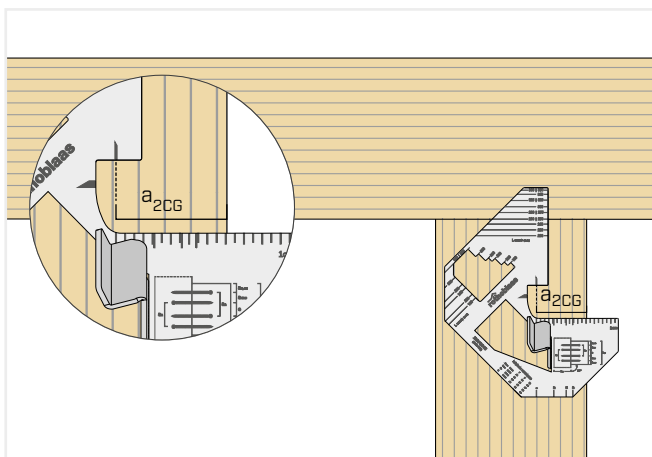


MINIMUM DISTANCES BETWEEN THE SCREWS

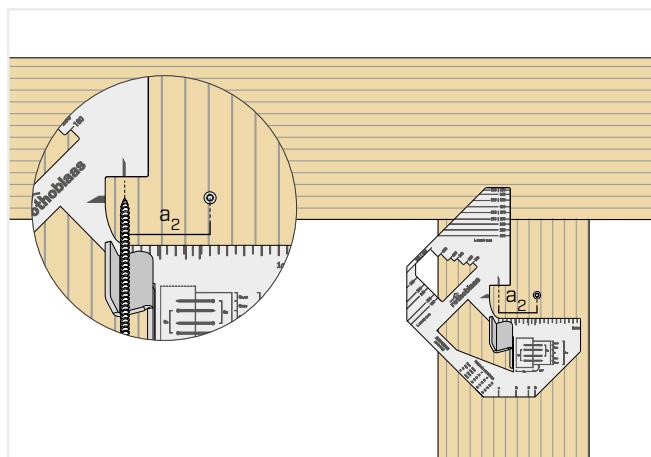

FLOOR-TO-FLOOR JOINT 45° + 45° TO THE RIGHT

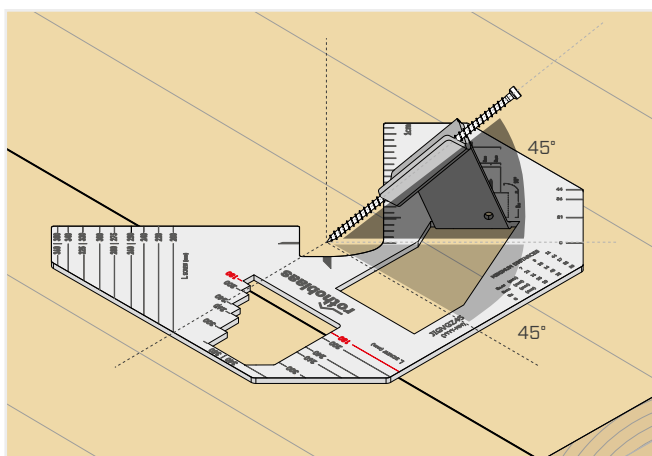

FLOOR-TO-FLOOR JOINT 45° + 45° TO THE LEFT

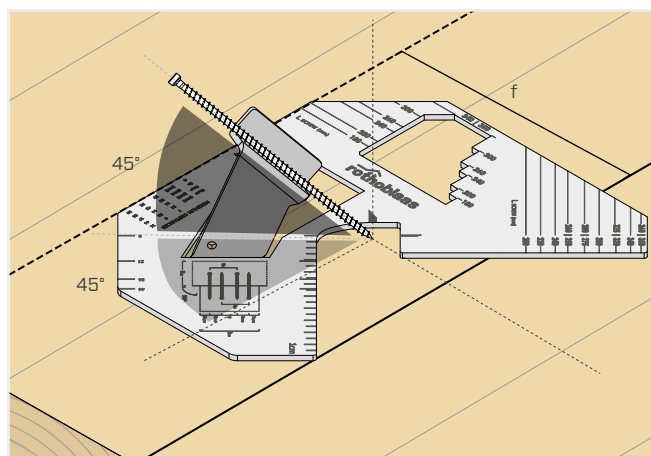

NOTES:

For further information on the use of the template, refer to the assembly instructions available at www.rothoblaas.com.