

HSS HOLE CUTTER

FOR CUTTING VENTILATION DUCTS IN TRUSSES

UNIVERSAL

Cuts insulation material of any kind (glass and rock wool, polystyrene, wood fibre, etc.) as well as timber, chipboard and plasterboard panels. Cutting solid timber up to a thickness of 30 mm.

FREEHAND USE

With a powerful hand drill, the hole cutter can be used freehand without additional tools. Approx. 500 rpm




CODES AND DIMENSIONS

CODE	Ø cutter		TL		EL		pcs
	[mm]	[in]	[mm]	[in]	[mm]	[in]	
F2170086	85	3 3/8	420	16 9/16	300	11 3/4	1
F2170111	110	4 3/8	420	16 9/16	300	11 3/4	1
F2170130	130	5 1/8	420	16 9/16	300	11 3/4	1
F2170152	152	6	420	16 9/16	300	11 3/4	1
F2170170	170	6 3/4	420	16 9/16	300	11 3/4	1
F2170200	200	8	420	16 9/16	300	11 3/4	1

The supply includes the SW12 hexagonal connection (F2170005). Guide pin and drilling head must be ordered separately.

COMPLEMENTARY PRODUCTS - ACCESSORIES

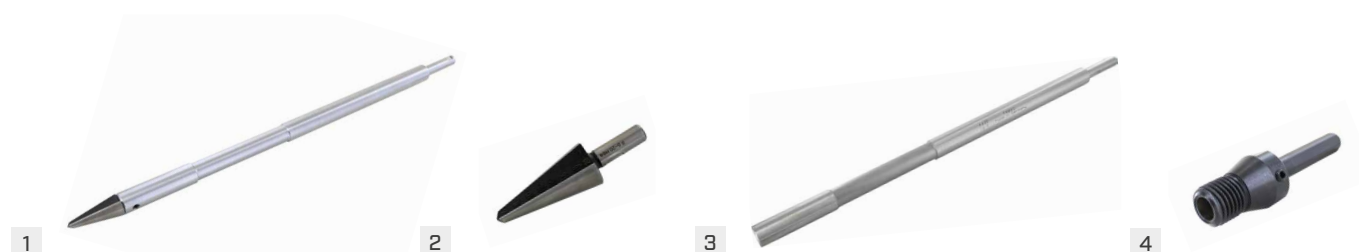

CODE	description	A Ø		TL		EL		pcs
		[mm]	[in]	[mm]	[in]	[mm]	[in]	
1 F2170030	guide pin with drilling head	20	13/16	470	18 1/2	410	16 1/8	1
2 F2170010	guide pin only	19,5	3/4	430	16 15/16	380	15	1
3 F3690002	drilling head only	8 - 20	5/16 - 13/16	70	2 3/4	40	1 9/16	1
4 F2170005	hexagonal connection for HSS SW 12 hole cutter							1