

START BAND

CE
EN 13984

WATERPROOF PROFILE WITH HIGH MECHANICAL RESISTANCE



COMPATIBILITY



DAMP
PROOF



ELASTIC

ELASTICITY


Thanks to its elasticity, it is extremely easy to install even around corners and it is resistant to perforations or mechanical fastening.

DURABILITY

It is compatible with bitumen, it does not degrade and it is UV-resistant. It is resistant to walking wear and cold temperatures.



1 START BAND

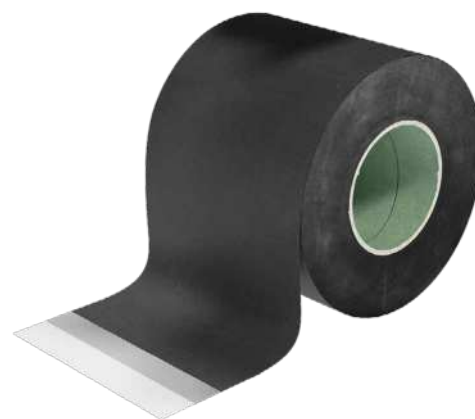

2 START BAND ADHESIVE

COMPOSITION

support: EPDM-based synthetic rubber

TECHNICAL DATA

Properties	standard	value	USC units
Water vapour transmission (Sd)	EN ISO 12572	40 m	0.09 US Perm
Water vapour resistance factor (μ)	EN 1931	50000	200 MN-s/g
Tensile strength	DIN 53504	≥ 7,0 MPa	-
Elongation	DIN 53504	≥ 300%	-
Resistance to nail tearing	DIN 53504	≥ 10 kN/m	≥ 2.25 lbf/in
Watertightness	EN 1928	compliant	-
Durability:			
- watertightness after artificial ageing	EN 1296/EN 1928	compliant	-
- in the presence of alkalis	EN 1847/EN 12311-2	npd	-
Reaction to fire	EN 13501-1	class E	-
Resistance to temperature	-	-30/+75 °C	-22/+167 °F
Application temperature	-	-10/+35 °C	+14/+95 °F

Store the product in a dry, covered location.

Waste classification (2014/955/EU): 17 02 03.

CODES AND DIMENSIONS

CODE		B	s	L	B	s	L	
		[mm]	[mm]	[m]	[in]	[mil]	[ft]	
1	START100	100	0,8	20	3.9	32	66	12
	START150	150	0,8	20	5.9	32	66	8
	START200	200	0,8	20	7.9	32	66	5
	START250	250	0,8	20	9.8	32	66	5
2	STARTA120	120	0,8	20	4.7	32	66	12
	STARTA160	160	0,8	20	6.3	32	66	3

■ FIELDS OF APPLICATION



■ RELATED PRODUCTS



CUTTER
page 394



PRIMER SPRAY
page 112



HAMMER STAPLER 22
page 396



DOUBLE BAND
page 68



WIDE RANGE, INCLUDING ADHESIVE

Also available in an adhesive version (STARTA120 and STARTA160), ideal when applied in combination with ALU START, for an infallible connection to the ground.

SAFETY

It protects walls and foundation walls against rising damp over time, even at extreme temperatures. Also suitable as a general damp-proof course barrier.