

# PLASTER BAND IN|OUT

SPECIAL HIGH-ADHESION TAPE, CAN BE PLASTERED



## EXCELLENT ADHESION

Its excellent adhesion makes it ideal for application on most surfaces, even at low temperatures.

## RESISTANT SEPARATION FILM

Even when applied in tight spaces and corners, the PP liner can be removed without risk of failure.



## CODES AND DIMENSIONS

### PLASTER BAND IN

| CODE           | liner<br>[mm] | B<br>[mm] | t<br>[mm] | T<br>[mm] | L<br>[m] | liner<br>[in] | B<br>[in] | L<br>[ft] |  |
|----------------|---------------|-----------|-----------|-----------|----------|---------------|-----------|-----------|---------------------------------------------------------------------------------------|
| 1 PLASTIN1560  | 15/60         | 75        | -         | 75        | 25       | 0.6/2.4       | 3.0       | 82        | 6                                                                                     |
| 1 PLASTIN1585  | 15/85         | 100       | -         | 100       | 25       | 0.6/3.4       | 4.0       | 82        | 4                                                                                     |
| 1 PLASTIN15135 | 15/135        | 150       | -         | 150       | 25       | 0.6/5.3       | 5.9       | 82        | 2                                                                                     |
| 2 PLASTIN7520  | 75            | 75        | 20        | 75        | 25       | 3.0           | 3.0       | 82        | 5                                                                                     |
| 2 PLASTIN10020 | 100           | 100       | 20        | 100       | 25       | 3.9           | 3.9       | 82        | 4                                                                                     |
| 2 PLASTIN15020 | 150           | 150       | 20        | 150       | 25       | 5.9           | 5.9       | 82        | 2                                                                                     |

### PLASTER BAND OUT

| CODE            | liner<br>[mm] | B<br>[mm] | t<br>[mm] | T<br>[mm] | L<br>[m] | liner<br>[in] | B<br>[in] | L<br>[ft] |  |
|-----------------|---------------|-----------|-----------|-----------|----------|---------------|-----------|-----------|---------------------------------------------------------------------------------------|
| 1 PLASTOUT1560  | 15/60         | 75        | -         | 75        | 25       | 0.6/2.4       | 3.0       | 82        | 6                                                                                     |
| 1 PLASTOUT1585  | 15/88         | 100       | -         | 100       | 25       | 0.6/3.4       | 4.0       | 82        | 4                                                                                     |
| 1 PLASTOUT15135 | 15/135        | 150       | -         | 150       | 25       | 0.6/5.3       | 5.9       | 82        | 2                                                                                     |
| 1 PLASTOUT15185 | 15/185        | 200       | -         | 200       | 25       | 0.6/7.3       | 7.9       | 82        | 2                                                                                     |
| 2 PLASTOUT7520  | 75            | 75        | 20        | 75        | 25       | 3.0           | 3.0       | 82        | 5                                                                                     |
| 2 PLASTOUT10020 | 100           | 100       | 20        | 100       | 25       | 3.9           | 3.9       | 82        | 4                                                                                     |
| 2 PLASTOUT15020 | 150           | 150       | 20        | 150       | 25       | 5.9           | 5.9       | 82        | 2                                                                                     |
| 2 PLASTOUT20020 | 200           | 200       | 20        | 200       | 25       | 7.9           | 7.9       | 82        | 2                                                                                     |



## ■ FIELDS OF APPLICATION



## ■ RELATED PRODUCTS



PRIMER  
page 113



BLACK BAND  
page 144



MANICA PLASTER  
page 146



MANICA FLEX  
page 148



### CAN BE PLASTERED

Technical fabric ideal to be subsequently plastered. The pre-cut liner allows for quick and easy installation and an high level of aesthetics due to the possibility of concealing the tape behind claddings or plaster.

# PLASTER BAND IN

## COMPOSITION

- ① support: 2-layer PP vapour control membrane
- ② adhesive: acrylic dispersion without solvents
- ③ release liner: easy-release PP film



## TECHNICAL DATA

| Properties                                                                  | standard       | value                               | USC units            |
|-----------------------------------------------------------------------------|----------------|-------------------------------------|----------------------|
| Thickness                                                                   | -              | 0,5 mm                              | 20 mil               |
| Water vapour transmission (Sd)                                              | -              | approx. 22 m                        | approx. 0.16 US Perm |
| Watertightness                                                              | -              | W1                                  | -                    |
| Reaction to fire                                                            | EN 13501-1     | E                                   | -                    |
| Adhesion strength on OSB at 90° after 10 minutes                            | EN ISO 29862   | 8,5 N/10 mm                         | 4.9 lbf/in           |
| Adhesion strength on OSB at 180° after 10 minutes                           | EN ISO 29862   | 8,5 N/10 mm                         | 4.9 lbf/in           |
| Adhesion strength (average) on membrane in PP after 24 hours <sup>(1)</sup> | EN ISO 12316-2 | 16 N/50 mm                          | 1.8 lbf/in           |
| Resistance to temperature                                                   | -              | -40/+100 °C                         | -22/+212 °F          |
| Application temperature <sup>(2)</sup>                                      | -              | -5/+40 °C                           | +23/+104 °F          |
| Storage temperature <sup>(3)</sup>                                          | -              | +5/+25 °C                           | +41/+77 °F           |
| Exposure to weather                                                         | -              | 3 months                            | -                    |
| Resistance to heavy rain                                                    | -              | compliant                           | -                    |
| Resistance to penetration of air                                            | EN 12114       | < 0,1 m³/(h·m·daPa <sup>2/3</sup> ) | -                    |
| Solvents                                                                    | -              | no                                  | -                    |

<sup>(1)</sup> Minimum required value according to DTU 31.2 P1-2 (France): 15 N/50 mm.

<sup>(2)</sup> On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

<sup>(3)</sup> Store the product in a cool, dry place for no more than 6 months.

Waste classification (2014/955/EU): 08 04 10.

## COMPOSITION

- ① support: 2-layer PP vapour control membrane
- ② adhesive: acrylic dispersion without solvents
- ③ release liner: easy-release PP film



## TECHNICAL DATA

| Properties                         | standard   | value                               | USC units      |
|------------------------------------|------------|-------------------------------------|----------------|
| Thickness                          | DIN 53855  | 0,5 mm                              | 20 mil         |
| Water vapour transmission (Sd)     | EN 1931    | > 10 m                              | > 0.35 US Perm |
| Watertightness                     | EN 13984   | W1                                  | -              |
| Reaction to fire                   | EN 13501-1 | E                                   | -              |
| Resistance to temperature          | -          | -40/+80 °C                          | -40/+176 °F    |
| Application temperature            | -          | > +5 °C                             | > +41 °F       |
| Storage temperature <sup>(1)</sup> | -          | +5/+25 °C                           | +41/+77 °F     |
| Exposure to weather                | -          | 3 months                            | -              |
| Resistance to heavy rain           | EN 1027    | ≥ 1050 Pa                           | -              |
| Resistance to penetration of air   | EN 1026    | ≤ 0,1 m³/(h·m·daPa <sup>2/3</sup> ) | -              |
| Solvents                           | -          | no                                  | -              |

<sup>(1)</sup> Store the product in a cool, dry place for no more than 6 months.

Waste classification (2014/955/EU): 08 04 10.

# PLASTER BAND OUT

## COMPOSITION

- ① support: breathable 2-layer PP membrane
- ② adhesive: acrylic dispersion without solvents
- ③ release liner: easy-release PP film



## TECHNICAL DATA

| Properties                                                                  | standard       | value                                            | USC units            |
|-----------------------------------------------------------------------------|----------------|--------------------------------------------------|----------------------|
| Thickness                                                                   | -              | 0,5 mm                                           | 20 mil               |
| Water vapour transmission (Sd)                                              | -              | approx. 2 m                                      | approx. 1.75 US Perm |
| Watertightness                                                              | -              | W1                                               | -                    |
| Reaction to fire                                                            | EN 13501-1     | E                                                | -                    |
| Adhesion strength on OSB at 90° after 10 minutes                            | EN ISO 29862   | 8,5 N/10 mm                                      | 4.9 lbf/in           |
| Adhesion strength on OSB at 180° after 10 minutes                           | EN ISO 29862   | 8,5 N/10 mm                                      | 4.9 lbf/in           |
| Adhesion strength (average) on membrane in PP after 24 hours <sup>(1)</sup> | EN ISO 12316-2 | 16 N/50 mm                                       | 1.8 lbf/in           |
| Resistance to temperature                                                   | -              | -40/+100 °C                                      | -22/+212 °F          |
| Application temperature <sup>(2)</sup>                                      | -              | -5/+40 °C                                        | +23/+104 °F          |
| Storage temperature <sup>(3)</sup>                                          | -              | +5/+25 °C                                        | +41/+77 °F           |
| Exposure to weather                                                         | -              | 12 months                                        | -                    |
| Resistance to heavy rain                                                    | -              | compliant                                        | -                    |
| Resistance to penetration of air                                            | EN 12114       | < 0,1 m <sup>3</sup> /(h·m·daPa <sup>2/3</sup> ) | -                    |
| Solvents                                                                    | -              | no                                               | -                    |

<sup>(1)</sup> Minimum required value according to DTU 31.2 P1-2 (France): 15 N/50 mm.

<sup>(2)</sup> On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

<sup>(3)</sup> Store the product in a cool, dry place for no more than 6 months.

Waste classification (2014/955/EU): 08 04 10.

## COMPOSITION

- ① support: breathable 2-layer PP membrane
- ② adhesive: acrylic dispersion without solvents
- ③ release liner: easy-release PP film



## TECHNICAL DATA


| Properties                         | standard   | value                                            | USC units     |
|------------------------------------|------------|--------------------------------------------------|---------------|
| Thickness                          | DIN 53855  | 0,7 mm                                           | 28 mil        |
| Water vapour transmission (Sd)     | EN 1931    | < 1 m                                            | > 3.5 US Perm |
| Watertightness                     | EN 13984   | W1                                               | -             |
| Reaction to fire                   | EN 13501-1 | E                                                | -             |
| Resistance to temperature          | -          | -40/+80 °C                                       | -40/+176 °F   |
| Application temperature            | -          | +5/+40 °C                                        | +41/+104 °F   |
| Storage temperature <sup>(1)</sup> | -          | +5/+25 °C                                        | +41/+77 °F    |
| Exposure to weather                | -          | 3 months                                         | -             |
| Resistance to heavy rain           | EN 1027    | ≥ 1050 Pa                                        | -             |
| Resistance to penetration of air   | EN 1026    | ≤ 0,1 m <sup>3</sup> /(h·m·daPa <sup>2/3</sup> ) | -             |
| Solvents                           | -          | no                                               | -             |

<sup>(1)</sup> Store the product in a cool, dry place for no more than 6 months.

Waste classification (2014/955/EU): 08 04 10.

## RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN


APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

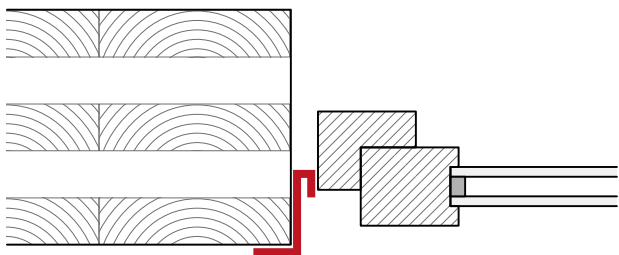

7 ROLLER


## RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

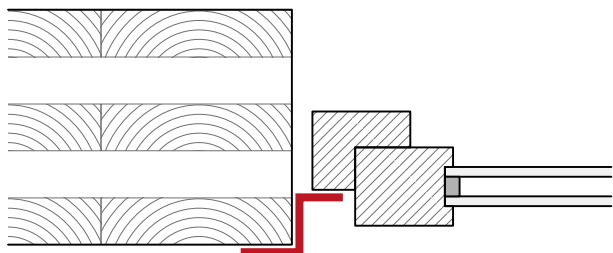

## RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT


APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

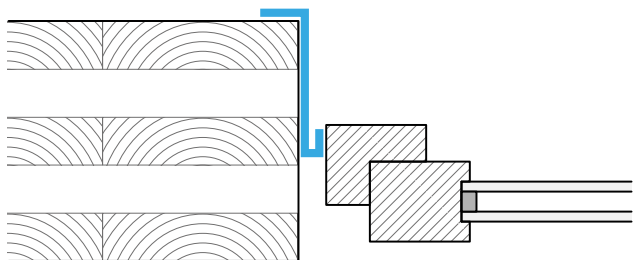

4 EXPAND BAND, WINDOW BAND

## RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

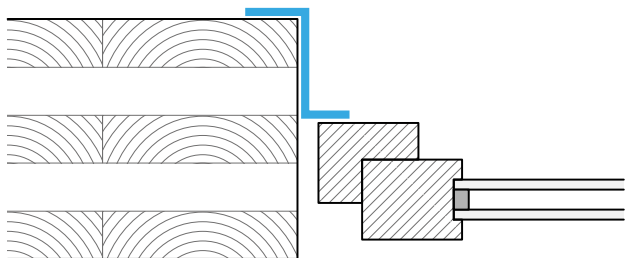

7 ROLLER