

# VGS EVO



## FULLY THREADED SCREW WITH COUNTERSUNK OR HEXAGONAL HEAD

### C4 EVO COATING

Surface treatment of epoxy resin and aluminium flakes. No rust after 1440 hours of salt spray exposure test, as per ISO 9227. Can be used in wet service outdoor applications and under class C4 atmospheric corrosion conditions.

### STRUCTURAL APPLICATIONS

Approved for structural applications subject to stresses in any direction vs the grain (0° - 90°). Safety certified by numerous tests carried out for any direction of insertion. Cyclical SEISMIC-REV tests according to EN 12512. Countersunk head up to L = 600 mm, ideal for use on plates or for concealed reinforcements.

### AUTOCLAVE-TREATED TIMBER

The C4 EVO coating has been certified according to US acceptance criterion AC257 for outdoor use with ACQ-treated timber.

### 3 THORNS TIP

Thanks to the 3 THORNS tip, minimum installation distances are reduced. More screws can be used in less space and larger screws in smaller elements.



BIT INCLUDED

|                         |                                                  |
|-------------------------|--------------------------------------------------|
| DIAMETER [mm]           | 9 9 13 13                                        |
| LENGTH [mm]             | 80 100 800 1500                                  |
| SERVICE CONDITION       | EC1 EC3                                          |
| ATMOSPHERIC CORROSIVITY | C1 C2 C3 C4                                      |
| WOOD CORROSIVITY        | T1 T2 T3                                         |
| MATERIAL                | C4 EVO COATING carbon steel with C4 EVO coating  |
| CORE HARDNESS           | <390 HV as required in CSA 086:24 <sup>(1)</sup> |



### CANADIAN DESIGN VALUES

USA, EU and more design values available online.

### METAL-to-TIMBER recommended use:



## FIELDS OF USE

- timber based panels
- solid timber and glulam
- CLT and LVL
- high density woods
- ACQ, CCA treated timber

<sup>(1)</sup> Core hardness < 390 HV guaranteed for structural timber screws diameter 6 mm and above).



## OUTDOOR STRUCTURAL PERFORMANCE

Ideal for fastening timber framed panels and trusses (Rafter, Truss). Values also tested, certified and calculated for high density woods. Ideal for fastening timber-framed panels and lattice beams (Rafter, Truss).

## CLT & LVL

Values also tested, certified and calculated for CLT and high density woods such as laminated veneer lumber (LVL).

## CODES AND DIMENSIONS

| d <sub>1</sub><br>[mm] | CODE        | L<br>[mm] | b<br>[mm] | pcs |
|------------------------|-------------|-----------|-----------|-----|
| 9<br>TX 40             | VGSEVO9120  | 120       | 110       | 50  |
|                        | VGSEVO9160  | 160       | 150       | 50  |
|                        | VGSEVO9200  | 200       | 190       | 50  |
|                        | VGSEVO9240  | 240       | 230       | 50  |
|                        | VGSEVO9280  | 280       | 270       | 50  |
|                        | VGSEVO9320  | 320       | 310       | 25  |
|                        | VGSEVO9360  | 360       | 350       | 25  |
| 11<br>TX 50            | VGSEVO11100 | 100       | 90        | 25  |
|                        | VGSEVO11150 | 150       | 140       | 25  |
|                        | VGSEVO11200 | 200       | 190       | 25  |
|                        | VGSEVO11250 | 250       | 240       | 25  |
|                        | VGSEVO11300 | 300       | 290       | 25  |
|                        | VGSEVO11350 | 350       | 340       | 25  |
|                        | VGSEVO11400 | 400       | 390       | 25  |
|                        | VGSEVO11500 | 500       | 490       | 25  |
|                        | VGSEVO11600 | 600       | 590       | 25  |

| d <sub>1</sub><br>[mm] | CODE        | L<br>[mm] | b<br>[mm] | pcs |
|------------------------|-------------|-----------|-----------|-----|
| 13<br>TX 50            | VGSEVO13200 | 200       | 190       | 25  |
|                        | VGSEVO13300 | 300       | 280       | 25  |
|                        | VGSEVO13400 | 400       | 380       | 25  |
|                        | VGSEVO13500 | 500       | 480       | 25  |
|                        | VGSEVO13600 | 600       | 580       | 25  |
| 13<br>SW 19<br>TX 50   | VGSEVO13700 | 700       | 680       | 25  |
|                        | VGSEVO13800 | 800       | 780       | 25  |

## RELATED PRODUCTS




VGU EVO




TORQUE LIMITER

## GEOMETRY AND MECHANICAL CHARACTERISTICS

### VGS Ø9-Ø11

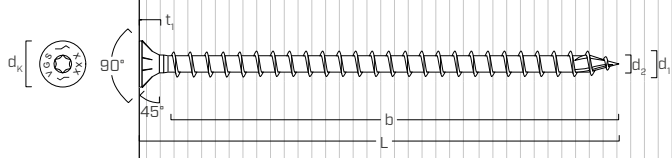


### VGS Ø13

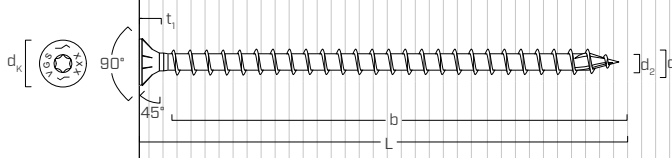


### VGS Ø9

120 mm ≤ L ≤ 360 mm




### VGS Ø11

L ≤ 250 mm




### VGS Ø11

250 mm < L ≤ 600 mm




### VGS Ø13

L ≤ 250 mm




### VGS Ø13

250 mm < L ≤ 600 mm



### VGS Ø13

L > 600 mm



## GEOMETRY

| Nominal diameter                          | d <sub>1</sub>   | [mm] | 9     | 11    | 13       | 13       |
|-------------------------------------------|------------------|------|-------|-------|----------|----------|
| Length                                    | L                | [mm] | -     | -     | ≤ 600 mm | > 600 mm |
| Countersunk head diameter                 | d <sub>K</sub>   | [mm] | 16,00 | 19,30 | 22,00    | -        |
| Countersunk head thickness                | t <sub>1</sub>   | [mm] | 6,50  | 8,20  | 9,40     | -        |
| Wrench size                               | SW               | -    | -     | -     | -        | SW 19    |
| Hexagonal head thickness                  | t <sub>s</sub>   | [mm] | -     | -     | -        | 7,50     |
| Root diameter                             | d <sub>2</sub>   | [mm] | 5,90  | 6,60  | 8,00     | 8,00     |
| Pre-drilling hole diameter <sup>(1)</sup> | d <sub>V,S</sub> | [mm] | 5,0   | 6,0   | 8,0      | 8,0      |
| Pre-drilling hole diameter <sup>(2)</sup> | d <sub>V,H</sub> | [mm] | 6,0   | 7,0   | 9,0      | 9,0      |


<sup>(1)</sup> Pre-drilling valid for softwood.

<sup>(2)</sup> Pre-drilling valid for hardwood and beech LVL.

## MECHANICAL PARAMETERS

| Nominal diameter                                                                | d <sub>1</sub>   | [mm]   | 9      | 11    | 13    |
|---------------------------------------------------------------------------------|------------------|--------|--------|-------|-------|
| Factored tensile strength                                                       | Φ <sub>f,u</sub> | [kN]   | 17,84  | 23,17 | 31,96 |
| Bending yield strength                                                          | F <sub>yb</sub>  | [MPa]  | 1069   | 1026  | 960   |
| Factored shear strength of the screw                                            | Φ <sub>V,s</sub> | [kN]   | 10,50  | 13,14 | 19,30 |
| Specified withdrawal resistance per millimeter of threaded shank (tip included) | Y <sub>w</sub>   | [N/mm] | G=0.35 | 78,56 | 96,02 |
|                                                                                 |                  |        | G=0.42 | 90,9  | 111,1 |
|                                                                                 |                  |        | G=0.49 | 102,8 | 125,7 |
|                                                                                 |                  |        | G=0.55 | 112,8 | 137,9 |

## EFFECTIVE THREAD USED IN CALCULATION

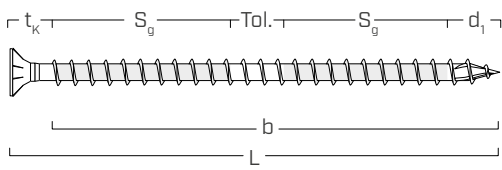

$$b = S_{g,tot} = L - t_k$$

$$S_g = (b - d_1 - Tol.) / 2$$

$t_k = 10 \text{ mm}$  or  $20 \text{ mm}$  depending on head type and diameter

represents the entire length of the threaded part (see table above)

represents the partial length of the threaded part net of a laying tolerance (Tol.) of 10 mm

### NOTES

- The length of the tip is equal to the nominal diameter of the respective fasteners,  $d_1$ , as specified in the ELC-4645 report.

## MINIMUM DISTANCES FOR AXIAL STRESSES | TIMBER





screws inserted **WITH** and **WITHOUT** pre-drilled hole


| $d_1$ |                      | 9<br>[mm] | 0.36<br>[in] | 11<br>[mm] | 0.44<br>[in] | 13<br>[mm] | 0.52<br>[in] |
|-------|----------------------|-----------|--------------|------------|--------------|------------|--------------|
| $S_p$ | $7 \cdot d^\dagger$  | 63        | 2 1/2        | 77         | 3 1/16       | 91         | 3 9/16       |
| $S_Q$ | $5 \cdot d$          | 45        | 1 3/4        | 55         | 2 3/16       | 65         | 2 9/16       |
| $a_L$ | $10 \cdot d^\dagger$ | 90        | 3 1/2        | 110        | 4 3/8        | 130        | 5 1/8        |
| $e_Q$ | $4 \cdot d$          | 36        | 1 7/16       | 44         | 1 3/4        | 52         | 2 1/16       |

† For Douglas Fir–Larch and Western Red Cedar, this minimum spacing shall be increased by 50%.


### SCREWS UNDER TENSION INSERTED WITH AN ANGLE $\alpha$ WITH RESPECT TO THE GRAIN

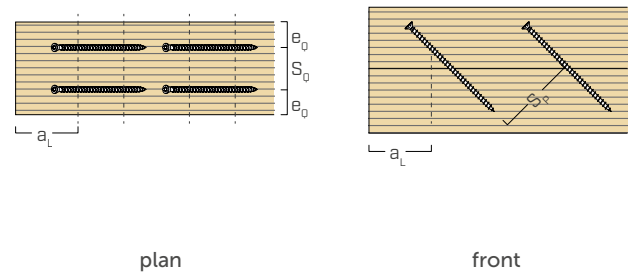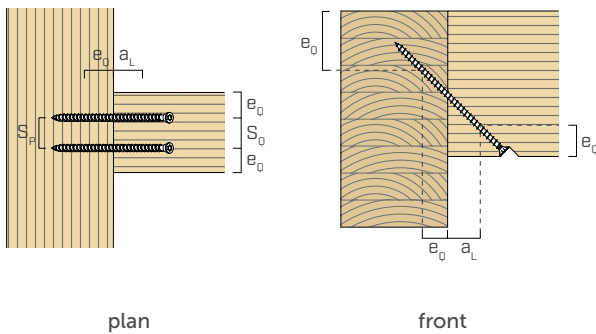

### SCREWS INSERTED WITH $\alpha = 90^\circ$ ANGLE WITH RESPECT TO THE GRAIN

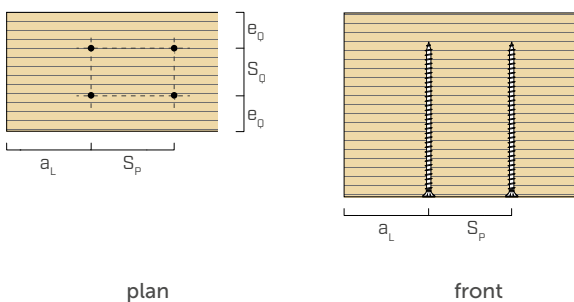


### CROSSED SCREWS INSERTED WITH AN ANGLE $\alpha$ WITH RESPECT TO THE GRAIN

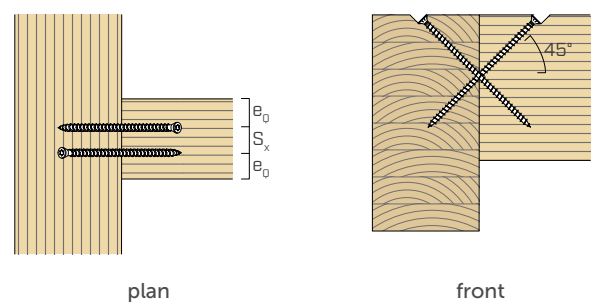

## MINIMUM DISTANCES FOR SHEAR LOADS


screws inserted **WITHOUT** pre-drilled hole  $G \leq 0.44$



| $d_1$ |                   | 9<br>[mm] | 0.36<br>[in] | 11<br>[mm] | 0.44<br>[in] | 13<br>[mm] | 0.52<br>[in] |
|-------|-------------------|-----------|--------------|------------|--------------|------------|--------------|
| $S_P$ | 12·d <sup>†</sup> | 108       | 4 1/4        | 132        | 5 3/16       | 156        | 6 1/8        |
| $S_Q$ | 5·d               | 45        | 1 3/4        | 55         | 2 3/16       | 65         | 2 9/16       |
| $a_L$ | 15·d <sup>†</sup> | 135       | 5 5/16       | 165        | 6 1/2        | 195        | 7 11/16      |
| $a$   | 10·d <sup>†</sup> | 90        | 3 1/2        | 110        | 4 3/8        | 130        | 5 1/8        |
| $e_Q$ | 10·d              | 90        | 3 1/2        | 110        | 4 3/8        | 130        | 5 1/8        |
| $e_P$ | 5·d               | 45        | 1 3/4        | 55         | 2 3/16       | 65         | 2 9/16       |
| $S_x$ | 2·d               | 18        | 11/16        | 22         | 7/8          | 26         | 1 1/32       |


<sup>†</sup> For Western Red Cedar, this minimum spacing shall be increased by 50%.

screws inserted **WITHOUT** pre-drilled hole  $0.44 < G \leq 0.50$



| $d_1$ |      | 9<br>[mm] | 0.36<br>[in] | 11<br>[mm] | 0.44<br>[in] | 13<br>[mm] | 0.52<br>[in] |
|-------|------|-----------|--------------|------------|--------------|------------|--------------|
| $S_P$ | 18·d | 162       | 6 3/8        | 198        | 7 13/16      | 234        | 9 1/4        |
| $S_Q$ | 7·d  | 63        | 2 1/2        | 77         | 3 1/16       | 91         | 3 9/16       |
| $a_L$ | 22·d | 198       | 7 13/16      | 242        | 9 1/2        | 286        | 11 1/4       |
| $a$   | 15·d | 135       | 5 5/16       | 165        | 6 1/2        | 195        | 7 11/16      |
| $e_Q$ | 12·d | 108       | 4 1/4        | 132        | 5 3/16       | 156        | 6 1/8        |
| $e_P$ | 7·d  | 63        | 2 1/2        | 77         | 3 1/16       | 91         | 3 9/16       |
| $S_x$ | 3·d  | 27        | 1 1/16       | 33         | 1 5/16       | 39         | 1 9/16       |

screws inserted **WITH** pre-drilled hole




| $d_1$ |                   | 9<br>[mm] | 0.36<br>[in] | 11<br>[mm] | 0.44<br>[in] | 13<br>[mm] | 0.52<br>[in] |
|-------|-------------------|-----------|--------------|------------|--------------|------------|--------------|
| $S_P$ | 5·d <sup>†</sup>  | 45        | 1 3/4        | 55         | 2 3/16       | 65         | 2 9/16       |
| $S_Q$ | 4·d               | 36        | 1 7/16       | 44         | 1 3/4        | 52         | 2 1/16       |
| $a_L$ | 12·d <sup>†</sup> | 108       | 4 1/4        | 132        | 5 3/16       | 156        | 6 1/8        |
| $a$   | 7·d <sup>†</sup>  | 63        | 2 1/2        | 77         | 3 1/16       | 91         | 3 9/16       |
| $e_Q$ | 7·d               | 63        | 2 1/2        | 77         | 3 1/16       | 91         | 3 9/16       |
| $e_P$ | 3·d               | 27        | 1 1/16       | 33         | 1 5/16       | 39         | 1 9/16       |
| $S_x$ | 1,5·d             | 13,5      | 9/16         | 16,5       | 5/8          | 19,5       | 3/4          |

<sup>†</sup> For Douglas Fir–Larch and Western Red Cedar, this minimum spacing shall be increased by 50%.





$\alpha$  = load-to-grain angle

$d$  =  $d_1$  = nominal diameter of the screw

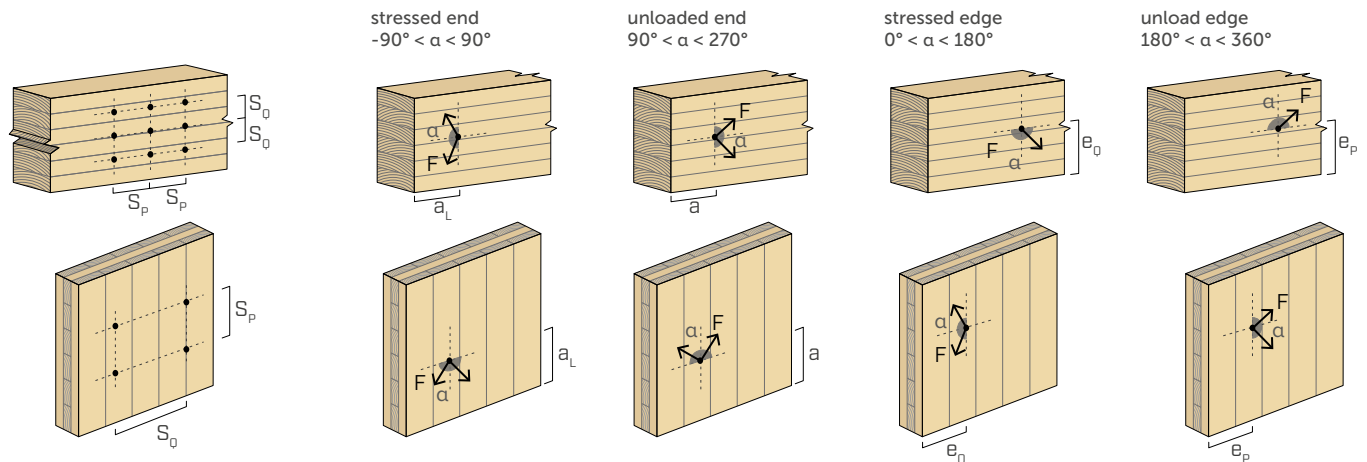






### NOTES

- The minimum spacing and distances comply with Clause 12.12.5 of CSA O86:24, where  $d_1$  refers to the nominal diameter of the self-tapping screw.
- The spacing, end, and edge distances for Rothoblaas screws installed in the narrow face of CLT panels shall comply with the specifications outlined in ETA-11/0030.
- The placement of fasteners subjected to axial loading shall be determined in accordance with Clause 12.12.5 of CSA O86:24.





| geometry                                                                          |              |              |              |              | TENSION/COMPRESSION <sup>(1)</sup>                                                |       |       |       |                                                                                    |       |       |       |                                                                                     |       |       |       |
|-----------------------------------------------------------------------------------|--------------|--------------|--------------|--------------|-----------------------------------------------------------------------------------|-------|-------|-------|------------------------------------------------------------------------------------|-------|-------|-------|-------------------------------------------------------------------------------------|-------|-------|-------|
|                                                                                   |              |              |              |              | $\alpha = 90^\circ$                                                               |       |       |       | total thread withdrawal<br>$\alpha = 45^\circ$                                     |       |       |       | end grain $\alpha = 0^\circ$                                                        |       |       |       |
|  |              |              |              |              |  |       |       |       |  |       |       |       |  |       |       |       |
|                                                                                   |              |              |              |              | factored withdrawal resistance $P_{rw}$                                           |       |       |       | factored withdrawal resistance $P_{rw}$                                            |       |       |       | factored withdrawal resistance $P_{rw}^{(2)}$                                       |       |       |       |
|                                                                                   |              |              |              |              | G                                                                                 |       |       |       | G                                                                                  |       |       |       | G                                                                                   |       |       |       |
| $d_1$                                                                             | L            | $S_{g,tot}$  | $A_{min}$    |              | 0.35                                                                              | 0.42  | 0.49  | 0.55  | 0.35                                                                               | 0.42  | 0.49  | 0.55  | 0.35                                                                                | 0.42  | 0.49  | 0.55  |
| [mm]<br>[in]                                                                      | [mm]<br>[in] | [mm]<br>[in] | [mm]<br>[in] | [mm]<br>[in] | [kN]                                                                              | [kN]  | [kN]  | [kN]  | [kN]                                                                               | [kN]  | [kN]  | [kN]  | [kN]                                                                                | [kN]  | [kN]  | [kN]  |
| <b>9</b><br>0.36                                                                  | 120          | 4 3/4        | 101          | 130          | 5,55                                                                              | 6,43  | 7,27  | 7,97  | 5,05                                                                               | 5,84  | 6,61  | 7,25  | 2,78                                                                                | 3,21  | 3,63  | 3,99  |
|                                                                                   | 160          | 6 1/4        | 141          | 170          | 7,75                                                                              | 8,97  | 10,15 | 11,13 | 7,05                                                                               | 8,16  | 9,22  | 10,12 | 3,88                                                                                | 4,49  | 5,07  | 5,57  |
|                                                                                   | 200          | 8            | 181          | 210          | 9,95                                                                              | 11,52 | 13,02 | 14,29 | 9,05                                                                               | 10,47 | 11,84 | 12,99 | 4,98                                                                                | 5,76  | 6,51  | 7,15  |
|                                                                                   | 240          | 9 1/2        | 221          | 250          | 12,15                                                                             | 14,06 | 15,90 | 17,45 | 11,05                                                                              | 12,78 | 14,46 | 15,86 | 6,08                                                                                | 7,03  | 7,95  | 8,73  |
|                                                                                   | 280          | 11           | 261          | 290          | 14,35                                                                             | 16,61 | 18,78 | 20,61 | 13,05                                                                              | 15,10 | 17,07 | 18,74 | 7,18                                                                                | 8,30  | 9,39  | 10,30 |
|                                                                                   | 320          | 12 5/8       | 301          | 330          | 16,55                                                                             | 19,15 | 21,66 | 23,77 | 15,05                                                                              | 17,41 | 19,69 | 21,61 | 8,28                                                                                | 9,58  | 10,83 | 11,88 |
|                                                                                   | 360          | 14 1/4       | 341          | 370          | 18,75                                                                             | 21,70 | 24,54 | 26,93 | 17,05                                                                              | 19,73 | 22,31 | 24,48 | 9,38                                                                                | 10,85 | 12,27 | 13,46 |
| <b>11</b><br>0.44                                                                 | 100          | 4            | 79           | 110          | 5,31                                                                              | 6,14  | 6,95  | 7,63  | 4,83                                                                               | 5,59  | 6,32  | 6,93  | 2,65                                                                                | 3,07  | 3,48  | 3,81  |
|                                                                                   | 150          | 6            | 129          | 160          | 8,67                                                                              | 10,03 | 11,35 | 12,45 | 7,88                                                                               | 9,12  | 10,32 | 11,32 | 4,34                                                                                | 5,02  | 5,68  | 6,23  |
|                                                                                   | 200          | 8            | 179          | 210          | 12,03                                                                             | 13,92 | 15,75 | 17,28 | 10,94                                                                              | 12,66 | 14,32 | 15,71 | 6,02                                                                                | 6,96  | 7,88  | 8,64  |
|                                                                                   | 250          | 10           | 229          | 260          | 15,39                                                                             | 17,81 | 20,15 | 22,11 | 13,99                                                                              | 16,19 | 18,32 | 20,10 | 7,70                                                                                | 8,90  | 10,07 | 11,05 |
|                                                                                   | 300          | 11 3/4       | 279          | 310          | 18,75                                                                             | 21,70 | 24,55 | 26,93 | 17,05                                                                              | 19,73 | 22,32 | 24,48 | 9,38                                                                                | 10,85 | 12,27 | 13,47 |
|                                                                                   | 350          | 13 3/4       | 329          | 360          | 22,11                                                                             | 25,59 | 28,95 | 31,76 | 20,10                                                                              | 23,26 | 26,32 | 28,87 | 11,06                                                                               | 12,79 | 14,47 | 15,88 |
|                                                                                   | 400          | 15 3/4       | 379          | 410          | 25,47                                                                             | 29,47 | 33,35 | 36,58 | 23,16                                                                              | 26,80 | 30,32 | 33,26 | 12,74                                                                               | 14,74 | 16,67 | 18,29 |
|                                                                                   | 500          | 19 3/4       | 479          | 510          | 32,20                                                                             | 37,25 | 42,15 | 46,24 | 29,27                                                                              | 33,87 | 38,32 | 42,03 | 16,10                                                                               | 18,63 | 21,07 | 23,12 |
|                                                                                   | 600          | 23 5/8       | 579          | 610          | 38,92                                                                             | 45,03 | 50,95 | 55,89 | 35,38                                                                              | 40,94 | 46,31 | 50,81 | 19,46                                                                               | 22,51 | 25,47 | 27,95 |
| <b>13</b><br>0.52                                                                 | 200          | 8            | 177          | 210          | 14,06                                                                             | 16,29 | 18,40 | 20,18 | 12,78                                                                              | 14,81 | 16,73 | 18,35 | 7,03                                                                                | 8,15  | 9,20  | 10,09 |
|                                                                                   | 300          | 11 3/4       | 267          | 310          | 21,21                                                                             | 24,58 | 27,75 | 30,45 | 19,28                                                                              | 22,34 | 25,23 | 27,68 | 10,61                                                                               | 12,29 | 13,88 | 15,22 |
|                                                                                   | 400          | 15 3/4       | 367          | 410          | 29,16                                                                             | 33,78 | 38,15 | 41,85 | 26,51                                                                              | 30,71 | 34,68 | 38,04 | 14,58                                                                               | 16,89 | 19,07 | 20,92 |
|                                                                                   | 500          | 19 3/4       | 467          | 510          | 37,10                                                                             | 42,99 | 48,54 | 53,25 | 33,73                                                                              | 39,08 | 44,13 | 48,41 | 18,55                                                                               | 21,49 | 24,27 | 26,63 |
|                                                                                   | 600          | 23 5/8       | 567          | 610          | 45,05                                                                             | 52,19 | 58,94 | 64,66 | 40,95                                                                              | 47,45 | 53,58 | 58,78 | 22,52                                                                               | 26,10 | 29,47 | 32,33 |
|                                                                                   | 700          | 27 1/2       | 667          | 710          | 52,99                                                                             | 61,40 | 69,33 | 76,06 | 48,18                                                                              | 55,82 | 63,03 | 69,14 | 26,50                                                                               | 30,70 | 34,67 | 38,03 |
|                                                                                   | 800          | 31 1/2       | 767          | 810          | 60,94                                                                             | 70,60 | 79,73 | 87,46 | 55,40                                                                              | 64,18 | 72,48 | 79,51 | 30,47                                                                               | 35,30 | 39,86 | 43,73 |

$\alpha$  = screw-to-grain angle

NOTES and GENERAL PRINCIPLES on page 10.

|                                                                                   |      |        |               |                   | TENSION/COMPRESSION <sup>(1)</sup>                                                |       |       |       |                                                                                    |       |       |       |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------|--------|---------------|-------------------|-----------------------------------------------------------------------------------|-------|-------|-------|------------------------------------------------------------------------------------|-------|-------|-------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| geometry                                                                          |      |        |               |                   | partial thread withdrawal<br>$\alpha = 90^\circ$                                  |       |       |       | end grain $\alpha = 0^\circ$                                                       |       |       |       | steel<br>tension                                                                    | buckling<br>$\alpha = 90^\circ$                                                     |
|  |      |        |               |                   |  |       |       |       |  |       |       |       |  |  |
|                                                                                   |      |        |               |                   | factored withdrawal<br>resistance $P_{rw}$                                        |       |       |       | factored withdrawal<br>resistance $P_{rw}^{(2)}$                                   |       |       |       | factored tension<br>resistance $T_{rs}$                                             | factored buckling<br>resistance $P_{rb}$                                            |
| $d_1$<br>[mm]<br>[in]                                                             | L    |        | $S_g$<br>[mm] | $A_{min}$<br>[mm] | G                                                                                 |       |       |       | G                                                                                  |       |       |       | [kN]                                                                                | [kN]                                                                                |
|                                                                                   | [mm] | [in]   |               |                   | 0.35                                                                              | 0.42  | 0.49  | 0.55  | 0.35                                                                               | 0.42  | 0.49  | 0.55  |                                                                                     |                                                                                     |
| <b>9</b><br>0.36                                                                  | 120  | 4 3/4  | 45            | 65                | 2,47                                                                              | 2,86  | 3,24  | 3,55  | 1,24                                                                               | 1,43  | 1,62  | 1,78  | 17,84                                                                               | 16,37                                                                               |
|                                                                                   | 160  | 6 1/4  | 65            | 85                | 3,57                                                                              | 4,14  | 4,68  | 5,13  | 1,79                                                                               | 2,07  | 2,34  | 2,57  |                                                                                     |                                                                                     |
|                                                                                   | 200  | 8      | 85            | 105               | 4,67                                                                              | 5,41  | 6,12  | 6,71  | 2,34                                                                               | 2,70  | 3,06  | 3,36  |                                                                                     |                                                                                     |
|                                                                                   | 240  | 9 1/2  | 105           | 125               | 5,77                                                                              | 6,68  | 7,56  | 8,29  | 2,89                                                                               | 3,34  | 3,78  | 4,15  |                                                                                     |                                                                                     |
|                                                                                   | 280  | 11     | 125           | 145               | 6,87                                                                              | 7,95  | 9,00  | 9,87  | 3,44                                                                               | 3,98  | 4,50  | 4,94  |                                                                                     |                                                                                     |
|                                                                                   | 320  | 12 5/8 | 145           | 165               | 7,97                                                                              | 9,23  | 10,43 | 11,45 | 3,99                                                                               | 4,61  | 5,22  | 5,72  |                                                                                     |                                                                                     |
|                                                                                   | 360  | 14 1/4 | 165           | 185               | 9,07                                                                              | 10,50 | 11,87 | 13,03 | 4,54                                                                               | 5,25  | 5,94  | 6,51  |                                                                                     |                                                                                     |
| <b>11</b><br>0.44                                                                 | 100  | 4      | 35            | 55                | 2,35                                                                              | 2,72  | 3,08  | 3,38  | 1,18                                                                               | 1,36  | 1,54  | 1,69  | 23,17                                                                               | 19,66                                                                               |
|                                                                                   | 150  | 6      | 60            | 80                | 4,03                                                                              | 4,67  | 5,28  | 5,79  | 2,02                                                                               | 2,33  | 2,64  | 2,90  |                                                                                     |                                                                                     |
|                                                                                   | 200  | 8      | 85            | 105               | 5,71                                                                              | 6,61  | 7,48  | 8,21  | 2,86                                                                               | 3,31  | 3,74  | 4,10  |                                                                                     |                                                                                     |
|                                                                                   | 250  | 10     | 110           | 130               | 7,39                                                                              | 8,55  | 9,68  | 10,62 | 3,70                                                                               | 4,28  | 4,84  | 5,31  |                                                                                     |                                                                                     |
|                                                                                   | 300  | 11 3/4 | 135           | 155               | 9,07                                                                              | 10,50 | 11,88 | 13,03 | 4,54                                                                               | 5,25  | 5,94  | 6,52  |                                                                                     |                                                                                     |
|                                                                                   | 350  | 13 3/4 | 160           | 180               | 10,75                                                                             | 12,44 | 14,08 | 15,44 | 5,38                                                                               | 6,22  | 7,04  | 7,72  |                                                                                     |                                                                                     |
|                                                                                   | 400  | 15 3/4 | 185           | 205               | 12,43                                                                             | 14,39 | 16,28 | 17,86 | 6,22                                                                               | 7,19  | 8,14  | 8,93  |                                                                                     |                                                                                     |
|                                                                                   | 500  | 19 3/4 | 235           | 255               | 15,80                                                                             | 18,28 | 20,68 | 22,68 | 7,90                                                                               | 9,14  | 10,34 | 11,34 |                                                                                     |                                                                                     |
|                                                                                   | 600  | 23 5/8 | 285           | 305               | 19,16                                                                             | 22,16 | 25,08 | 27,51 | 9,58                                                                               | 11,08 | 12,54 | 13,76 |                                                                                     |                                                                                     |
| <b>13</b><br>0.52                                                                 | 200  | 8      | 85            | 105               | 6,75                                                                              | 7,82  | 8,84  | 9,69  | 3,38                                                                               | 3,91  | 4,42  | 4,85  | 31,96                                                                               | 27,02                                                                               |
|                                                                                   | 300  | 11 3/4 | 130           | 155               | 10,33                                                                             | 11,97 | 13,51 | 14,82 | 5,16                                                                               | 5,98  | 6,76  | 7,41  |                                                                                     |                                                                                     |
|                                                                                   | 400  | 15 3/4 | 180           | 205               | 14,30                                                                             | 16,57 | 18,71 | 20,53 | 7,15                                                                               | 8,28  | 9,36  | 10,26 |                                                                                     |                                                                                     |
|                                                                                   | 500  | 19 3/4 | 230           | 255               | 18,27                                                                             | 21,17 | 23,91 | 26,23 | 9,14                                                                               | 10,59 | 11,95 | 13,11 |                                                                                     |                                                                                     |
|                                                                                   | 600  | 23 5/8 | 280           | 305               | 22,25                                                                             | 25,77 | 29,11 | 31,93 | 11,12                                                                              | 12,89 | 14,55 | 15,96 |                                                                                     |                                                                                     |
|                                                                                   | 700  | 27 1/2 | 330           | 355               | 26,22                                                                             | 30,38 | 34,30 | 37,63 | 13,11                                                                              | 15,19 | 17,15 | 18,81 |                                                                                     |                                                                                     |
|                                                                                   | 800  | 31 1/2 | 380           | 405               | 30,19                                                                             | 34,98 | 39,50 | 43,33 | 15,10                                                                              | 17,49 | 19,75 | 21,67 |                                                                                     |                                                                                     |

$\alpha$  = screw-to-grain angle

|                                                                                   |      | SLIDING <sup>(3)</sup>                                                            |                |      |                  |                                                           |       |       |       |                                                                                    |                |                  |                                                           |       |       |                                                                                     |                                             |
|-----------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------|----------------|------|------------------|-----------------------------------------------------------|-------|-------|-------|------------------------------------------------------------------------------------|----------------|------------------|-----------------------------------------------------------|-------|-------|-------------------------------------------------------------------------------------|---------------------------------------------|
| geometry                                                                          |      | timber-to-timber                                                                  |                |      |                  |                                                           |       |       |       | steel-to-timber                                                                    |                |                  |                                                           |       |       | steel tension                                                                       |                                             |
|  |      |  |                |      |                  |                                                           |       |       |       |  |                |                  |                                                           |       |       |  |                                             |
| d <sub>1</sub>                                                                    | L    |                                                                                   | S <sub>g</sub> | A    | B <sub>min</sub> | factored lateral resistance N <sub>r</sub> <sup>(4)</sup> |       |       |       | S <sub>PLATE</sub> <sup>(5)</sup>                                                  | S <sub>g</sub> | A <sub>min</sub> | factored lateral resistance N <sub>r</sub> <sup>(4)</sup> |       |       |                                                                                     | factored tension resistance T <sub>rs</sub> |
|                                                                                   |      |                                                                                   |                |      |                  | G                                                         |       |       |       |                                                                                    |                |                  | G                                                         |       |       |                                                                                     |                                             |
| [mm]<br>[in]                                                                      | [mm] | [in]                                                                              | [mm]           | [mm] | [mm]             | 0.35                                                      | 0.42  | 0.49  | 0.55  | [mm]<br>[in]                                                                       | [mm]           | [mm]             | 0.35                                                      | 0.42  | 0.49  | 0.55                                                                                | [kN]                                        |
| <b>9</b><br><b>0.36</b>                                                           | 120  | 4 3/4                                                                             | 45             | 45   | 60               | 1,91                                                      | 2,21  | 2,50  | 2,74  | 15,9<br>5/8                                                                        | 90             | 85               | 3,82                                                      | 4,42  | 5,00  | 5,48                                                                                | 12,61                                       |
|                                                                                   | 160  | 6 1/4                                                                             | 65             | 60   | 75               | 2,76                                                      | 3,19  | 3,61  | 3,96  |                                                                                    | 130            | 115              | 5,51                                                      | 6,38  | 7,22  | 7,92                                                                                |                                             |
|                                                                                   | 200  | 8                                                                                 | 85             | 75   | 90               | 3,61                                                      | 4,17  | 4,72  | 5,18  |                                                                                    | 170            | 140              | 7,21                                                      | 8,34  | 9,44  | 10,35                                                                               |                                             |
|                                                                                   | 240  | 9 1/2                                                                             | 105            | 90   | 105              | 4,45                                                      | 5,15  | 5,83  | 6,40  |                                                                                    | 210            | 170              | 8,91                                                      | 10,31 | 11,66 | 12,79                                                                               |                                             |
|                                                                                   | 280  | 11                                                                                | 125            | 105  | 120              | 5,30                                                      | 6,14  | 6,94  | 7,61  |                                                                                    | 250            | 200              | 10,61                                                     | 12,27 | 13,88 | 15,23                                                                               |                                             |
|                                                                                   | 320  | 12 5/8                                                                            | 145            | 115  | 130              | 6,15                                                      | 7,12  | 8,05  | 8,83  |                                                                                    | 290            | 225              | 12,30                                                     | 14,23 | 16,10 | 17,66                                                                               |                                             |
|                                                                                   | 360  | 14 1/4                                                                            | 165            | 130  | 145              | 7,00                                                      | 8,10  | 9,16  | 10,05 |                                                                                    | 330            | 255              | 14,00                                                     | 16,20 | 18,32 | 20,10                                                                               |                                             |
| <b>11</b><br><b>0.44</b>                                                          | 100  | 4                                                                                 | 35             | 40   | 55               | 1,81                                                      | 2,10  | 2,38  | 2,61  | 19,1<br>3/4                                                                        | 60             | 65               | 3,11                                                      | 3,60  | 4,07  | 4,47                                                                                | 16,38                                       |
|                                                                                   | 150  | 6                                                                                 | 60             | 60   | 75               | 3,11                                                      | 3,60  | 4,07  | 4,47  |                                                                                    | 110            | 100              | 5,70                                                      | 6,60  | 7,47  | 8,19                                                                                |                                             |
|                                                                                   | 200  | 8                                                                                 | 85             | 75   | 90               | 4,41                                                      | 5,10  | 5,77  | 6,33  |                                                                                    | 160            | 135              | 8,30                                                      | 9,60  | 10,86 | 11,91                                                                               |                                             |
|                                                                                   | 250  | 10                                                                                | 110            | 95   | 110              | 5,70                                                      | 6,60  | 7,47  | 8,19  |                                                                                    | 210            | 170              | 10,89                                                     | 12,60 | 14,25 | 15,64                                                                               |                                             |
|                                                                                   | 300  | 11 3/4                                                                            | 135            | 110  | 125              | 7,00                                                      | 8,10  | 9,16  | 10,05 |                                                                                    | 260            | 205              | 13,48                                                     | 15,60 | 17,65 | 19,36                                                                               |                                             |
|                                                                                   | 350  | 13 3/4                                                                            | 160            | 130  | 145              | 8,30                                                      | 9,60  | 10,86 | 11,91 |                                                                                    | 310            | 240              | 16,07                                                     | 18,60 | 21,04 | 23,08                                                                               |                                             |
|                                                                                   | 400  | 15 3/4                                                                            | 185            | 145  | 160              | 9,59                                                      | 11,10 | 12,56 | 13,78 |                                                                                    | 360            | 275              | 18,67                                                     | 21,60 | 24,43 | 26,81                                                                               |                                             |
|                                                                                   | 500  | 19 3/4                                                                            | 235            | 180  | 195              | 12,18                                                     | 14,10 | 15,95 | 17,50 |                                                                                    | 460            | 350              | 23,85                                                     | 27,60 | 31,22 | 34,25                                                                               |                                             |
|                                                                                   | 600  | 23 5/8                                                                            | 285            | 220  | 235              | 14,78                                                     | 17,10 | 19,34 | 21,22 |                                                                                    | 560            | 420              | 29,03                                                     | 33,59 | 38,01 | 41,70                                                                               |                                             |
| <b>13</b><br><b>0.52</b>                                                          | 200  | 8                                                                                 | 85             | 80   | 95               | 5,21                                                      | 6,04  | 6,82  | 7,48  | 22,2<br>7/8                                                                        | 155            | 135              | 9,50                                                      | 11,01 | 12,43 | 13,63                                                                               | 22,60                                       |
|                                                                                   | 300  | 11 3/4                                                                            | 130            | 110  | 125              | 7,97                                                      | 9,23  | 10,42 | 11,43 |                                                                                    | 255            | 205              | 15,63                                                     | 18,11 | 20,45 | 22,43                                                                               |                                             |
|                                                                                   | 400  | 15 3/4                                                                            | 180            | 145  | 160              | 11,03                                                     | 12,78 | 14,43 | 15,83 |                                                                                    | 355            | 275              | 21,76                                                     | 25,21 | 28,47 | 31,23                                                                               |                                             |
|                                                                                   | 500  | 19 3/4                                                                            | 230            | 180  | 195              | 14,10                                                     | 16,33 | 18,44 | 20,23 |                                                                                    | 455            | 345              | 27,89                                                     | 32,31 | 36,48 | 40,02                                                                               |                                             |
|                                                                                   | 600  | 23 5/8                                                                            | 280            | 215  | 230              | 17,16                                                     | 19,88 | 22,45 | 24,63 |                                                                                    | 555            | 415              | 34,01                                                     | 39,41 | 44,50 | 48,82                                                                               |                                             |
|                                                                                   | 700  | 27 1/2                                                                            | 330            | 250  | 265              | 20,22                                                     | 23,43 | 26,46 | 29,03 |                                                                                    | -              | -                | -                                                         | -     | -     | -                                                                                   |                                             |
|                                                                                   | 800  | 31 1/2                                                                            | 380            | 285  | 300              | 23,29                                                     | 26,98 | 30,47 | 33,43 |                                                                                    | -              | -                | -                                                         | -     | -     | -                                                                                   |                                             |

NOTES and GENERAL PRINCIPLES on page 10.

| geometry     |      |        |       |           | SHEAR <sup>[6]</sup>              |      |      |      |                                         |      |      |      |
|--------------|------|--------|-------|-----------|-----------------------------------|------|------|------|-----------------------------------------|------|------|------|
|              |      |        |       |           | timber-to-timber                  |      |      |      |                                         |      |      |      |
|              |      |        |       |           | $\alpha = 90^\circ$               |      |      |      | $\alpha = 0^\circ$                      |      |      |      |
|              |      |        |       |           |                                   |      |      |      |                                         |      |      |      |
|              |      |        |       |           | factored lateral resistance $N_r$ |      |      |      | factored lateral resistance $N_r^{(2)}$ |      |      |      |
| $d_1$        | L    |        | $S_g$ | $A^{(7)}$ | G                                 |      |      |      | G                                       |      |      |      |
|              |      |        |       |           | 0.35                              | 0.42 | 0.49 | 0.55 | 0.35                                    | 0.42 | 0.49 | 0.55 |
| [mm]<br>[in] | [mm] | [in]   | [mm]  | [mm]      | [kN]                              | [kN] | [kN] | [kN] | [kN]                                    | [kN] | [kN] | [kN] |
| 9<br>0.36    | 120  | 4 3/4  | 45    | 60        | 2,18                              | 2,59 | 3,00 | 3,34 | 1,37                                    | 1,55 | 1,73 | 1,87 |
|              | 160  | 6 1/4  | 65    | 80        | 2,85                              | 3,17 | 3,48 | 3,73 | 1,61                                    | 1,83 | 2,05 | 2,23 |
|              | 200  | 8      | 85    | 100       | 3,12                              | 3,49 | 3,84 | 4,13 | 1,85                                    | 2,12 | 2,38 | 2,59 |
|              | 240  | 9 1/2  | 105   | 120       | 3,40                              | 3,81 | 4,20 | 4,52 | 2,09                                    | 2,40 | 2,70 | 2,90 |
|              | 280  | 11     | 125   | 140       | 3,67                              | 4,13 | 4,56 | 4,90 | 2,33                                    | 2,62 | 2,88 | 3,09 |
|              | 320  | 12 5/8 | 145   | 160       | 3,91                              | 4,28 | 4,62 | 4,90 | 2,48                                    | 2,78 | 3,06 | 3,29 |
|              | 360  | 14 1/4 | 165   | 180       | 3,91                              | 4,28 | 4,62 | 4,90 | 2,62                                    | 2,94 | 3,24 | 3,49 |
| 11<br>0.44   | 100  | 4      | 35    | 50        | 2,07                              | 2,46 | 2,85 | 3,18 | 1,34                                    | 1,59 | 1,84 | 2,03 |
|              | 150  | 6      | 60    | 75        | 3,24                              | 3,81 | 4,17 | 4,47 | 1,86                                    | 2,12 | 2,37 | 2,57 |
|              | 200  | 8      | 85    | 100       | 3,84                              | 4,29 | 4,72 | 5,07 | 2,22                                    | 2,54 | 2,85 | 3,11 |
|              | 250  | 10     | 110   | 125       | 4,26                              | 4,78 | 5,27 | 5,68 | 2,58                                    | 2,97 | 3,34 | 3,62 |
|              | 300  | 11 3/4 | 135   | 150       | 4,68                              | 5,27 | 5,75 | 6,09 | 2,94                                    | 3,31 | 3,65 | 3,92 |
|              | 350  | 13 3/4 | 160   | 175       | 4,86                              | 5,32 | 5,75 | 6,09 | 3,17                                    | 3,56 | 3,92 | 4,22 |
|              | 400  | 15 3/4 | 185   | 200       | 4,86                              | 5,32 | 5,75 | 6,09 | 3,38                                    | 3,80 | 4,20 | 4,52 |
|              | 500  | 19 3/4 | 235   | 250       | 4,86                              | 5,32 | 5,75 | 6,09 | 3,67                                    | 4,02 | 4,35 | 4,60 |
|              | 600  | 23 5/8 | 285   | 300       | 4,86                              | 5,32 | 5,75 | 6,09 | 3,67                                    | 4,02 | 4,35 | 4,60 |
| 13<br>0.52   | 200  | 8      | 80    | 100       | 4,95                              | 5,53 | 6,06 | 6,50 | 2,75                                    | 3,13 | 3,50 | 3,80 |
|              | 300  | 11 3/4 | 125   | 150       | 5,81                              | 6,52 | 7,18 | 7,73 | 3,58                                    | 4,11 | 4,62 | 5,03 |
|              | 400  | 15 3/4 | 175   | 200       | 6,65                              | 7,28 | 7,87 | 8,33 | 4,32                                    | 4,85 | 5,34 | 5,74 |
|              | 500  | 19 3/4 | 225   | 250       | 6,65                              | 7,28 | 7,87 | 8,33 | 4,82                                    | 5,42 | 5,95 | 6,30 |
|              | 600  | 23 5/8 | 275   | 300       | 6,65                              | 7,28 | 7,87 | 8,33 | 5,03                                    | 5,51 | 5,95 | 6,30 |
|              | 700  | 27 1/2 | 325   | 350       | 6,65                              | 7,28 | 7,87 | 8,33 | 5,03                                    | 5,51 | 5,95 | 6,30 |
|              | 800  | 31 1/2 | 375   | 400       | 6,65                              | 7,28 | 7,87 | 8,33 | 5,03                                    | 5,51 | 5,95 | 6,30 |

$\alpha$  = screw-to-grain angle.

## STRUCTURAL VALUES

### GENERAL PRINCIPLES

- The reference factored lateral resistance for self-tapping screws has been determined following the guidelines in Clause 12.12 of the CSA O86:24 including the withdrawal restraint effect. Listed values are based on standard long term load duration factor ( $K_D = 1.0$ ), dry service condition factor ( $K_{SF} = 1.0$ ), and treatment factor ( $K_T = 1.0$ ).
- The factored thread withdrawal resistance were evaluated considering a penetration length of  $S_{g, tot}$  or  $S_g$ , as shown in the table. For intermediate values of  $S_g$  it is possible to linearly interpolate.
- The reference lateral design values are calculated for screws inserted without pre-drilling hole as per CSA O86:24 Clause 12.12.10.5.3. The direction of the bearing-to-grain angle does not influence lateral resistance. In the case of screws inserted with pre-drilling hole, greater resistance values can be obtained.
- The steel plate is assumed to be ASTM A36 with a minimum ultimate tensile strength,  $f_u$ , equal to 58 ksi (400 MPa).
- VGS EVO screws must be positioned in accordance with the minimum distances.
- G is the mean relative density according to CSA O86:24 Table A12. Most common wood species are assumed such as Northern species ( $G = 0.35$ ), Spruce-Pine-Fir ( $G = 0.42$ ), Douglas Fir ( $G = 0.49$ ), and Southern Pine ( $G = 0.55$ ).
- The tabulated lateral design values are based on both wood members having the same specific gravity G.
- As part of the connection design, the designer must size and verify both the structural wood members and the steel plates separately.
- Combined shear and tensile stresses shall comply with the interaction criteria outlined in CSA O86:24 Clause 12.12.11.

### NOTES

- (1) Factored withdrawal resistances were calculated with the entire threaded portion of the screw,  $b$  (in millimeters), minus the tip length,  $L_{tip}$ . The length of the tip is equal to the nominal diameter of the respective fasteners,  $d_1$ , as specified in the ELC-4645 report. Factor for fastener axis-to-grain angle,  $J_\alpha$ , and the factor for dowel bearing effect for laterally loaded connections,  $J_w$ , varies according to connection geometry.
- (2) The angle between the fastener axis and the grain direction of the wood member,  $\alpha$ , is taken as zero for the end grain calculations.
- (3) For fully threaded screws, head pull-through does not govern the connection capacity, instead, thread withdrawal governs. The governing axial resistance is taken as the minimum of the screw's shear, thread withdrawal, and tensile resistances. In this case, the tensile resistance is always lower than the shear resistance, so the governing value is the minimum between thread withdrawal and tensile resistance.
- (4) The 45° inclined screw is intended to work in withdrawal and the resulting resistance of the connection is given by the projection of the withdrawal resistance (along screw axis) onto the shear plane.
- (5) The plate thickness ( $S_{PLATE}$ ) are understood to be the minimum values to allow the countersunk head of the screw to be accommodated.
- (6) Lateral resistances are factored and according to CSA O86:24 Clause 12.12.10. Values apply to dry service conditions and are representative of a single screw.
- (7) The fixable thickness (A) is considered as half the length of the screw ( $L/2$ ).