

TITAN N

CE
ETA-11/0496

ANGLE BRACKET FOR SHEAR AND TENSILE FORCES

HIGH HOLES

Ideal for CLT, it is easy to install thanks to the raised holes. Values also certified with partial fastening for presence of bedding grout or base plate.

80 kN SHEAR

Exceptional shear strengths. Up to 82,6 kN on concrete (with TCW washer). Up to 58,0 kN on timber.

70 kN TENSILE

On concrete, TCN angle brackets with TCW washers provide excellent tensile strength. $R_{1,k}$ up to 69,8 kN characteristic values.



USA, Canada and more design values available online.

SERVICE CLASS

SC1 SC2

MATERIAL




DX51D
Z275

TITAN N: DX51D + Z275 carbon steel.

S235
Fe/Zn12c

TITAN WASHER: S235 + Fe/Zn12c carbon steel

EXTERNAL LOADS

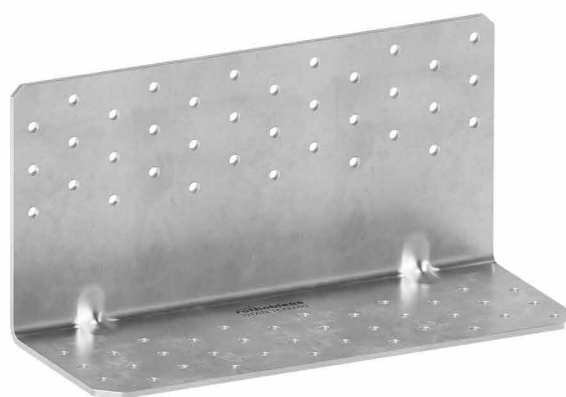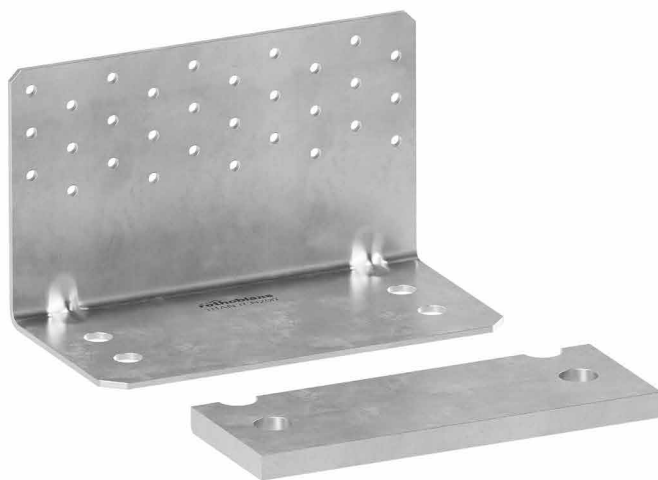


FIELDS OF USE

Shear and tension joints for timber walls. Suitable for walls subject to high stress. Timber-to-timber, timber-to-concrete and timber-to-steel configurations.

Can be applied to:

- solid timber and glulam
- CLT and LVL panels

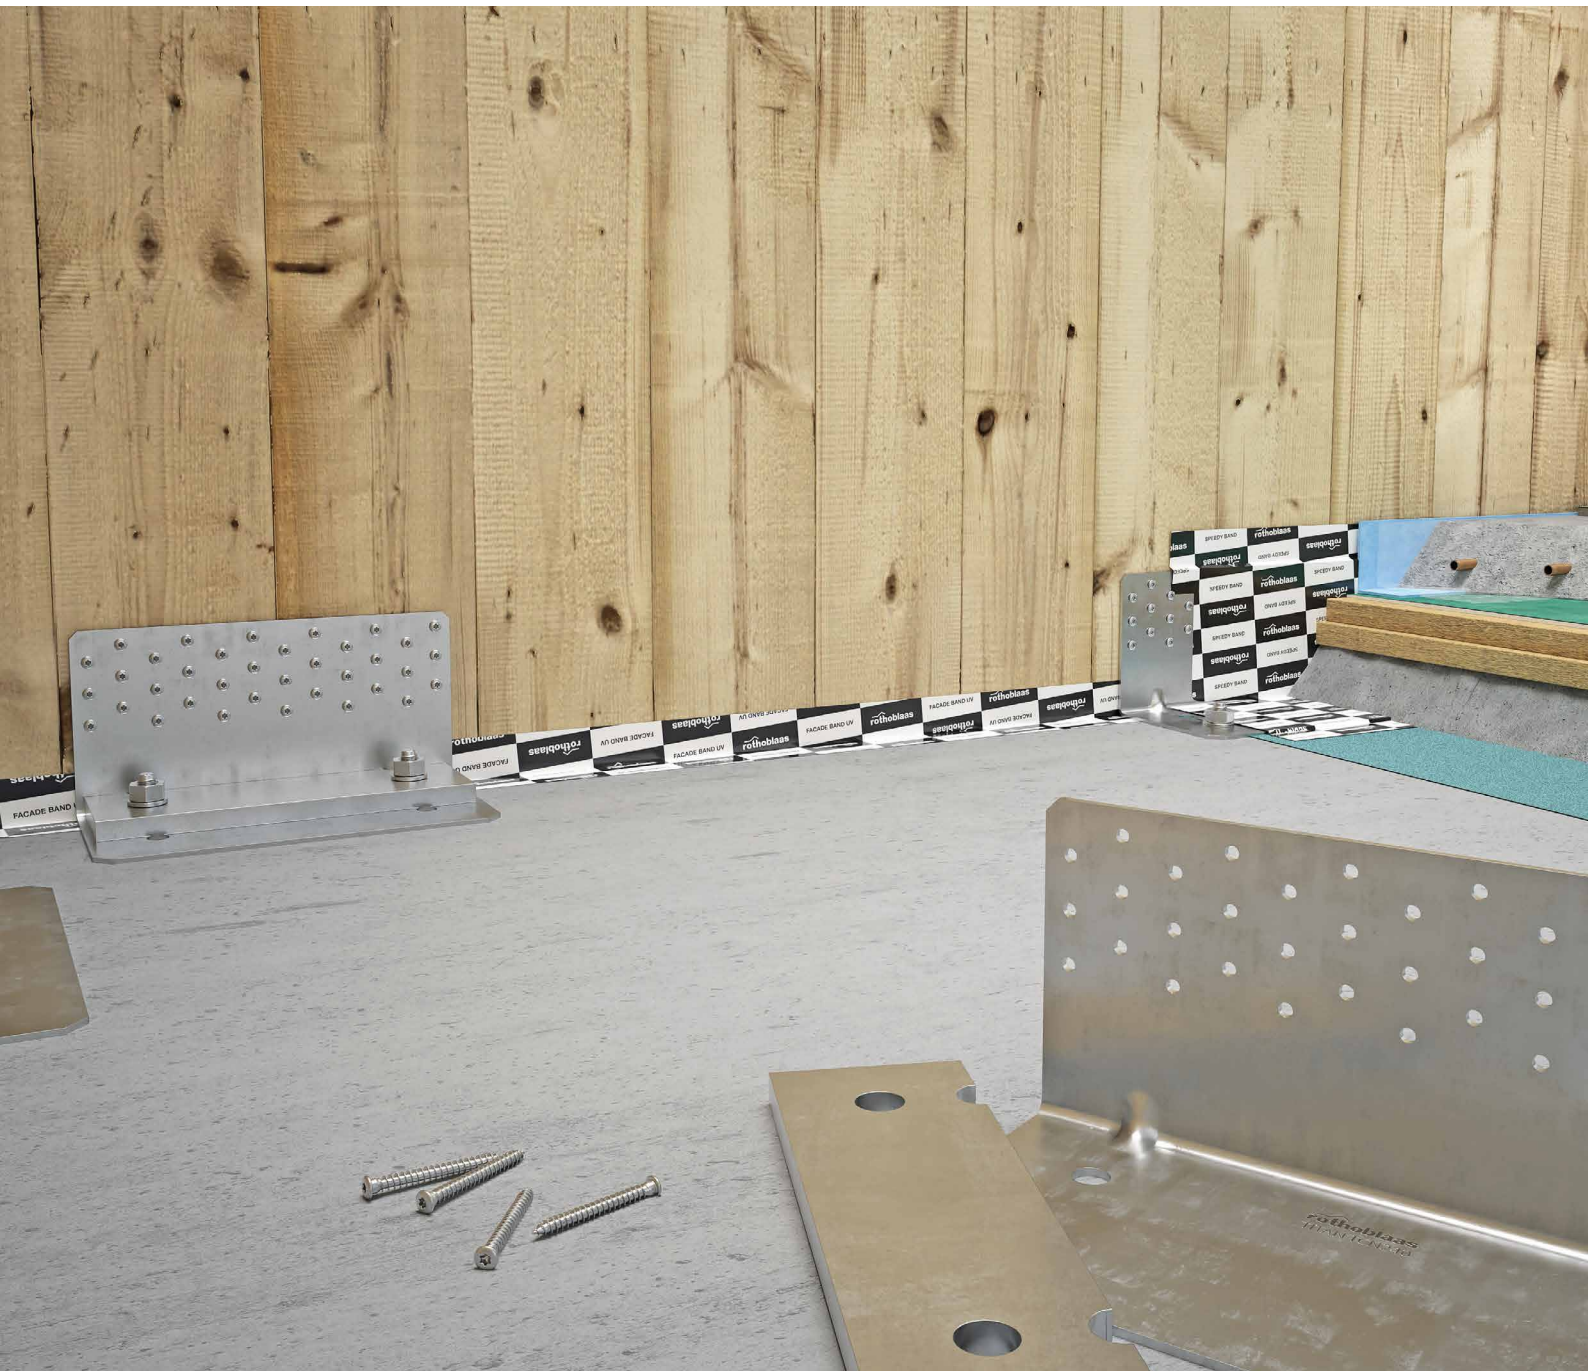

CONCEALED HOLD DOWN

Ideal on timber-to-concrete both as a hold down at the ends of the walls and as shear angle bracket along the walls. It can be integrated into the floor package due to its height of 120 mm.


TIMBER-TO-TIMBER

It can also be used in connections between CLT panels.

CODES AND DIMENSIONS


TITAN N - TCN | CONCRETE-TO-TIMBER JOINTS

CODE	B [mm] [in]	P [mm] [in]	H [mm] [in]	holes [mm] [in]	$n_V \varnothing 5$ $n_V \varnothing .20$ [pcs]	s [mm] [in]		pcs
TCN200	200 8	103 4 1/16	120 4 3/4	$\varnothing 13$ $\varnothing 0.52$	30	3 0.12	●	10
TCN240	240 9 1/2	123 4 13/16	120 4 3/4	$\varnothing 17$ $\varnothing 0.67$	36	3 0.12	●	10




TITAN WASHER - TCW | CONCRETE-TO-TIMBER JOINTS

CODE	TCN200	TCN240	B [mm] [in]	P [mm] [in]	s [mm] [in]	holes [mm] [in]		pcs
TCW200	●	-	190 7 1/2	72 2 13/16	12 0.47	$\varnothing 14$ $\varnothing 0.56$	●	1
TCW240	-	●	230 9 1/16	73 2 7/8	12 0.47	$\varnothing 18$ $\varnothing 0.71$	●	1




TITAN N - TTN | TIMBER-TO-TIMBER JOINTS

CODE	B [mm] [in]	P [mm] [in]	H [mm] [in]	$n_H \varnothing 5$ $n_H \varnothing .20$ [pcs]	$n_V \varnothing 5$ $n_V \varnothing .20$ [pcs]	s [mm] [in]		pcs
TTN240	240 9 1/2	93 3 11/16	120 4 3/4	36	36	3 0.12	●	10







ACOUSTIC PROFILE | TIMBER-TO-TIMBER JOINTS


CODE	type	B [mm] [in]	P [mm] [in]	s [mm] [in]		pcs
XYL3590240	XYLOFON PLATE	240 9 1/2	120 4 3/4	6 0.24	●	10



FASTENERS

type	description		d [mm]	support 
LBA	high bond nail		4	
LBS	round head screw		5	
LBS EVO	C4 EVO round head screw		5	
AB1	CE1 expansion anchor		12 - 16	
SKR	screw-in anchor		12 - 16	
VIN-FIX	vinyl ester chemical anchor		M12 - M16	
HYB-FIX	hybrid chemical anchor		M12 - M16	
EPO-FIX	epoxy chemical anchor		M12 - M16	

GEOMETRY

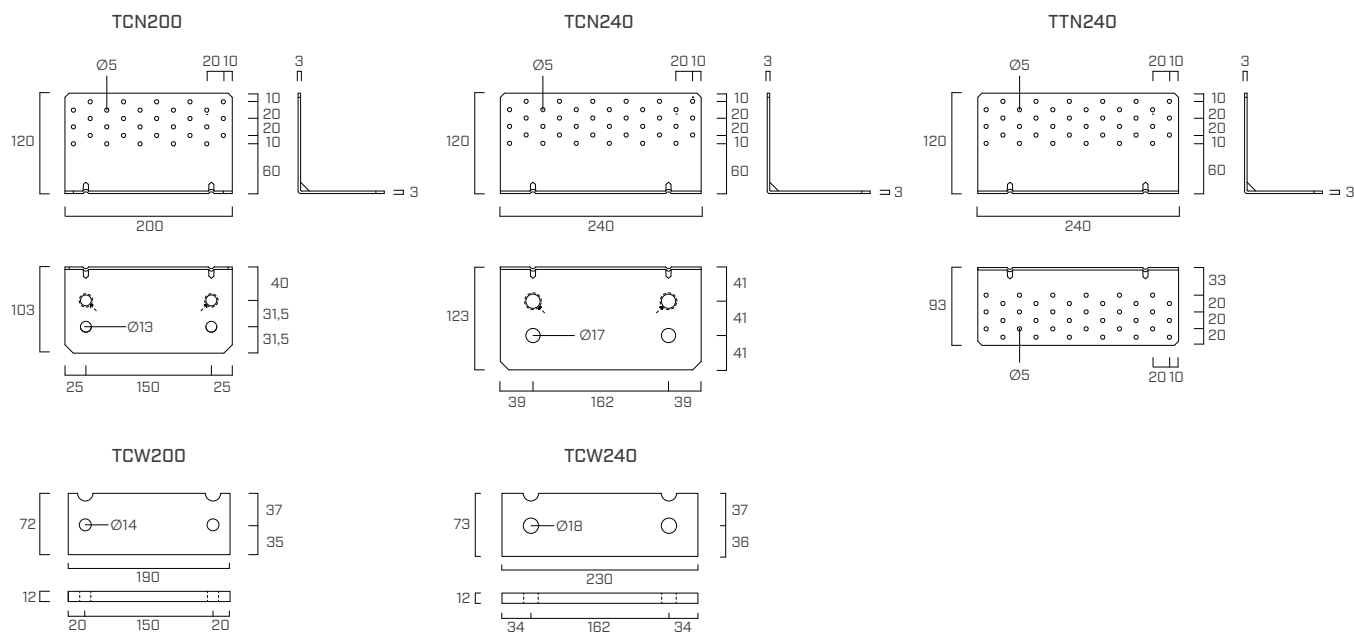


FASTENING PATTERNS


FASTENINGS FOR $F_{2/3}$ STRESS

In the presence of design requirements such as $F_{2/3}$ stresses of different value or the presence of an intermediate H_B layer (levelling grout, sill or ground) between the wall and the supporting surface, partial fastening patterns can be adopted:

TCN200

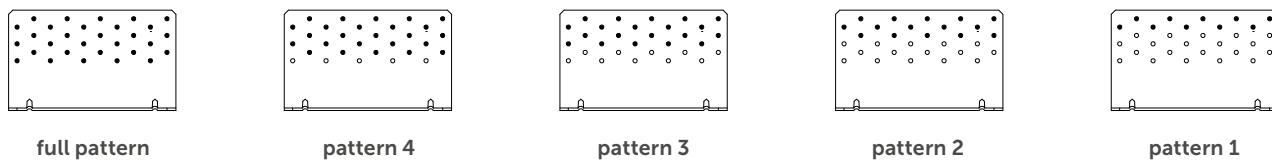

TCN240

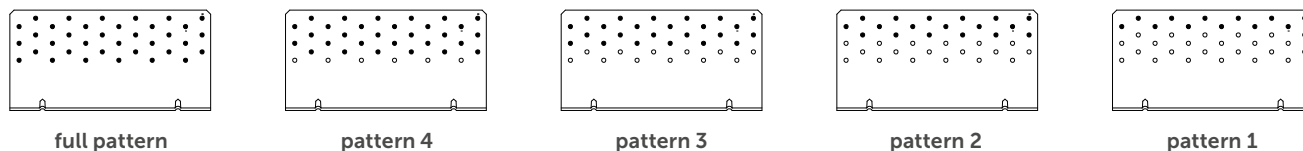


Pattern 2 also applies in case of F_4 , F_5 and $F_{4/5}$ stresses.

■ INSTALLATION

To fix **TITAN TCN** angle bracket to the concrete foundation, **2 anchors** must be used, according to one of the following installation configurations, according to the acting stress.

**ideal
installation**

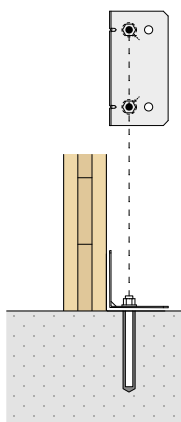


2 anchors positioned in the
INTERNAL HOLES (IN)
(identified by a mark on the product)

$$e=e_{y,IN}$$

Reduced stress on the anchor
(minimum e_y and k_t eccentricity)

Optimized connection strength

**alternative
installation**

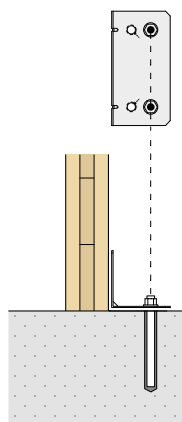


2 anchors placed in the
EXTERNAL HOLES (OUT)
(e.g. in case of clash between the
anchor and the concrete support
reinforcement)

$$e=e_{y,OUT}$$

Maximum stress on the anchor
(maximum e_y and k_t eccentricity)

Reduced connection strength



**installation
with washer**

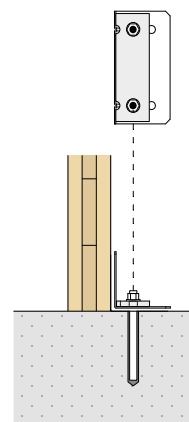

The **WASHER TCW** must be
fastened by means of 2 anchors
positioned in the **INTERNAL
HOLES (IN)**

$$e=e_{y,IN}$$


MAXIMUM HEIGHT OF THE INTERMEDIATE H_B LAYER

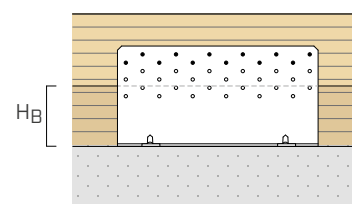

configuration on timber	n _y holes Ø5 [pcs]		CLT		C/GL	
	TCN200	TCN240	H_B max [mm]		H_B max [mm]	
			nails LBA Ø4	screws LBS Ø5	nails LBA Ø4	screws LBS Ø5
full pattern	30	36	20	30	32	10
pattern 4	25	30	30	40	42	20
pattern 3	20	24	40	50	52	30
pattern 2	15	18	50	60	62	40
pattern 1	10	12	60	70	72	50

The height of the H_B intermediate layer (levelling grout, sill or timber platform beam) is determined by taking into account the following regulatory requirements for fastenings on timber:

- CLT: minimum distances according to ÖNORM EN 1995:2014 (Annex K) for nails and ETA-11/0030 for screws.
- C/GL: minimum distances for solid timber or glulam with horizontal fibres consistent with EN 1995:2014 according to ETA considering a timber density of $\rho_k \leq 420 \text{ kg/m}^3$.

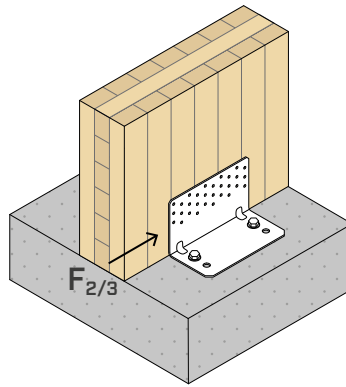

TIMBER STRENGTH

configuration on timber ⁽¹⁾	fastening holes Ø5			$R_{2/3,k}$ timber [kN]	$K_{2/3,ser}$ [N/mm]
	type	Ø x L [mm]	n_V [pcs]		
full pattern	LBA	Ø4 x 60	30	30,5	9000
	LBS	Ø5 x 70		42,1	
pattern 4	LBA	Ø4 x 60	25	24,0	7000
	LBS	Ø5 x 70		37,9	
pattern 3	LBA	Ø4 x 60	20	18,8	-
	LBS	Ø5 x 70		18,0	
pattern 2	LBA	Ø4 x 60	15	13,2	-
	LBS	Ø5 x 70		12,7	
pattern 1	LBA	Ø4 x 60	10	8,8	-
	LBS	Ø5 x 70		8,4	

CONCRETE STRENGTH

Strength values of some of the possible fastening solutions for anchors installed in the internal (IN) or external (OUT) holes.

configuration on concrete	fastening holes Ø13			$R_{2/3,d}$ concrete			
	type	Ø x L [mm]	n_H [pcs]	IN ⁽²⁾ [kN]	OUT ⁽³⁾ [kN]	$e_{y,IN}$ [mm]	$e_{y,OUT}$ [mm]
uncracked	VIN-FIX 5.8	M12 x 140	2	35,5	29,1	38,5	70
	VIN-FIX 8.8	M12 x 140		48,1	39,1		
	SKR	12 x 90		34,5	28,5		
	AB1	M12 x 115		33,1	27,2		
cracked	VIN-FIX 5.8	M12 x 140		35,5	29,1		
	HYB-FIX 8.8	M12 x 140		48,1	39,1		
	SKR	12 x 90		24,3	20,0		
	AB1	M12 x 115		32,5	26,7		
seismic	HYB-FIX 8.8	M12 x 195		29,0	23,8		
	SKR	12 x 90		9,0	7,3		
	AB1	M12 x 115		13,7	11,3		

installation	anchor type		t_{fix}	h_{ef}	h_{nom}	h_1	d_0	h_{min}
	type	Ø x L [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
TCN200	VIN-FIX 5.8/8.8	M12 x 140	3	121	121	130	14	200
		M12 x 195	3	176	176	185	14	210
	HYB-FIX 8.8	M12 x 140	3	121	121	130	14	210
		M12 x 195	3	176	176	185	14	210
	SKR	12 x 90	3	64	87	110	10	200
	AB1	M12 x 115	3	70	85	105	12	200

t_{fix} fastened plate thickness
 h_{nom} nominal anchoring depth
 h_{ef} effective anchoring depth
 h_1 minimum hole depth
 d_0 hole diameter in the concrete support
 h_{min} concrete minimum thickness

Precut INA threaded rod, with nut and washer.

MGS threaded rod class 8.8 to be cut to size: for more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com

NOTES


⁽¹⁾ Partial fastening pattern on page 5.

⁽²⁾ Installation of the anchors in the two internal holes (IN).

⁽³⁾ Installation of the anchors in external holes (OUT).

For the GENERAL PRINCIPLES of calculation, see page 16.

For the anchors verification refer to page 16.

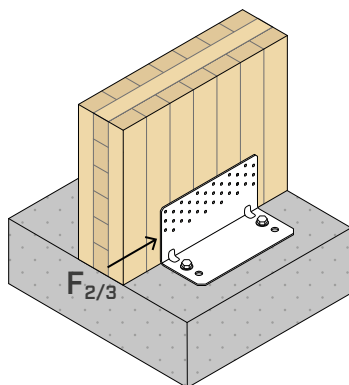

TIMBER STRENGTH

configuration on timber ⁽¹⁾	fastening holes Ø5			$R_{2/3,k \text{ timber}}$ [kN]	$K_{2/3,ser}$ [N/mm]
	type	Ø x L [mm]	n_V [pcs]		
full pattern	LBA	Ø4 x 60	36	41,7	12000
	LBS	Ø5 x 70		55,2	
pattern 4	LBA	Ø4 x 60	30	33,1	11000
	LBS	Ø5 x 70		51,3	
pattern 3	LBA	Ø4 x 60	24	25,9	-
	LBS	Ø5 x 70		24,9	
pattern 2	LBA	Ø4 x 60	18	18,4	-
	LBS	Ø5 x 70		17,6	
pattern 1	LBA	Ø4 x 60	12	12,2	-
	LBS	Ø5 x 70		11,7	

CONCRETE STRENGTH

Strength values of some of the possible fastening solutions for anchors installed in the internal (IN) or external (OUT) holes.

configuration on concrete	fastening holes Ø17			$R_{2/3,d \text{ concrete}}$			
	type	Ø x L [mm]	n_H [pcs]	IN ⁽²⁾ [kN]	OUT ⁽³⁾ [kN]	$e_{y,IN}$ [mm]	$e_{y,OUT}$ [mm]
uncracked	VIN-FIX 5.8	M16 x 160	2	67,2	52,9	39,5	80,5
	VIN-FIX 8.8	M16 x 160		90,1	70,9		
	SKR	16 x 130		65,0	51,2		
	AB1	M16 x 145		79,0	62,4		
cracked	VIN-FIX 5.8/8.8	M16 x 160		55,0	43,2		
	SKR	16 x 130		45,3	35,7		
	AB1	M16 x 145		67,0	53,1		
seismic	HYB-FIX 8.8	M16 x 195		35,2	27,7		
	EPO-FIX 8.8	M16 x 195		47,1	37,2		
	SKR	16 x 130		14,8	11,6		
	AB1	M16 x 145		21,8	17,2		

installation	anchor type		t_{fix}	h_{ef}	h_{nom}	h_1	d_0	h_{min}
	type	Ø x L [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
TCN240	VIN-FIX 5.8 / 8.8	M16 x 160	3	134	134	140	18	200
	HYB-FIX 8.8	M16 x 195	3	164	164	170	18	
	EPO-FIX 8.8	M16 x 195	3	164	164	170	18	
	SKR	16 x 130	3	85	127	150	14	
	AB1	M16 x 145	3	85	97	105	16	

t_{fix} fastened plate thickness
 h_{nom} nominal anchoring depth
 h_{ef} effective anchoring depth
 h_1 minimum hole depth
 d_0 hole diameter in the concrete support
 h_{min} concrete minimum thickness

Precut INA threaded rod, with nut and washer.

MGS threaded rod class 8.8 to be cut to size: for more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com

NOTES


⁽¹⁾ Partial fastening pattern on page 5.

⁽²⁾ Installation of the anchors in the two internal holes (IN).

⁽³⁾ Installation of the anchors in external holes (OUT).

For the GENERAL PRINCIPLES of calculation, see page 16.

For the anchors verification refer to page 16.

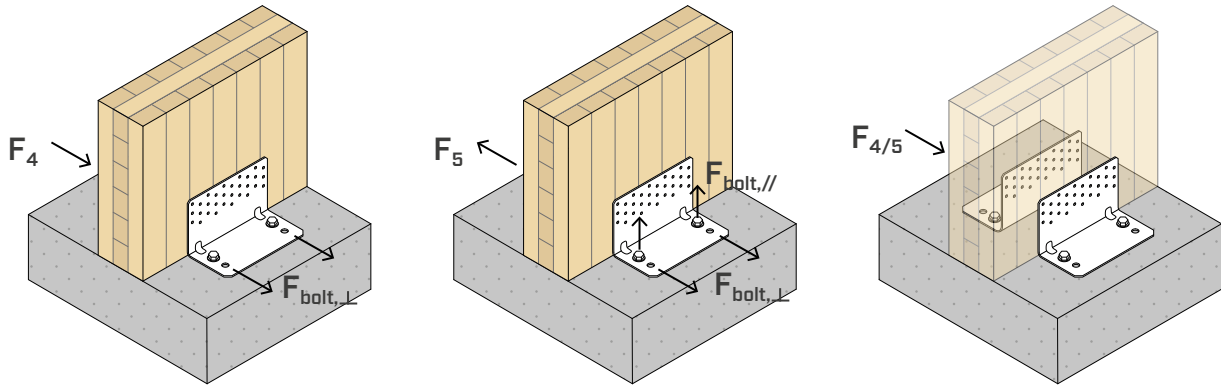

		TIMBER				STEEL		CONCRETE			
F_4		fastening holes Ø5			$R_{4,k}$ timber	$R_{4,k}$ steel		fastening holes	IN ⁽¹⁾		
		type	Ø x L [mm]	n_V [pcs]	[kN]	[kN]	γ_{steel}	Ø [mm]	n_H [pcs]	$k_{t\perp}$	$k_{t//}$
TCN200	full pattern	LBA	Ø4 x 60	30	20,9	22,4	γ_{M0}	M12	2	0,5	-
	pattern 2	LBS	Ø5 x 70	15	20,7	24,3	γ_{M0}				
TCN240	full pattern	LBA	Ø4 x 60	36	24,1	26,9	γ_{M0}	M16	2	0,5	-
	pattern 2	LBS	Ø5 x 70	18	23,9	29,1	γ_{M0}				

The group of 2 anchors must be verified for: $V_{Sd,y} = 2 \times k_{t\perp} \times F_{4,d}$

		TIMBER				STEEL		CONCRETE			
F_5		fastening holes Ø5			$R_{5,k}$ timber	$R_{5,k}$ steel		fastening holes	IN ⁽¹⁾		
		type	Ø x L [mm]	n_V [pcs]	[kN]	[kN]	γ_{steel}	Ø [mm]	n_H [pcs]	$k_{t\perp}$	$k_{t//}$
TCN200	full pattern	LBA	Ø4 x 60	30	6,6	2,7	γ_{M0}	M12	2	0,5	0,47
	pattern 2	LBS	Ø5 x 70	15	3,6	1,6	γ_{M0}			0,5	0,83
TCN240	full pattern	LBA	Ø4 x 60	36	8,0	3,3	γ_{M0}	M16	2	0,5	0,48
	pattern 2	LBS	Ø5 x 70	18	4,3	1,9	γ_{M0}			0,5	0,83

The group of 2 anchors must be verified for: $V_{Sd,y} = 2 \times k_{t\perp} \times F_{5,d}$; $N_{Sd,z} = 2 \times k_{t//} \times F_{5,d}$

		TIMBER				STEEL		CONCRETE			
$F_{4/5}$ TWO ANGLE BRACKETS		fastening holes Ø5			$R_{4/5,k}$ timber	$R_{4/5,k}$ steel		fastening holes	IN ⁽¹⁾		
		type	Ø x L [mm]	n_V [pcs]	[kN]	[kN]	γ_{steel}	Ø [mm]	n_H [pcs]	$k_{t\perp}$	$k_{t//}$
TCN200	full pattern	LBA	Ø4 x 60	30 + 30	25,6	14,9	γ_{M0}	M12	2 + 2	0,41	0,09
	pattern 2	LBS	Ø5 x 70	15 + 15	22,4	20,9	γ_{M0}			0,46	0,06
TCN240	full pattern	LBA	Ø4 x 60	36 + 36	27,8	24,7	γ_{M0}	M16	2 + 2	0,43	0,06
	pattern 2	LBS	Ø5 x 70	18 + 18	25,2	30,6	γ_{M0}			0,48	0,04


The group of 2 anchors must be verified for: $V_{Sd,y} = 2 \times k_{t\perp} \times F_{4/5,d}$; $N_{Sd,z} = 2 \times k_{t//} \times F_{4/5,d}$

NOTES

⁽¹⁾ Installation of the anchors in the two internal holes (IN).

For the GENERAL PRINCIPLES of calculation, see page 16.

- The F_4 , F_5 , $F_{4/5}$ values in the table are valid for the calculation eccentricity $e=0$ (timber elements prevented from rotating).

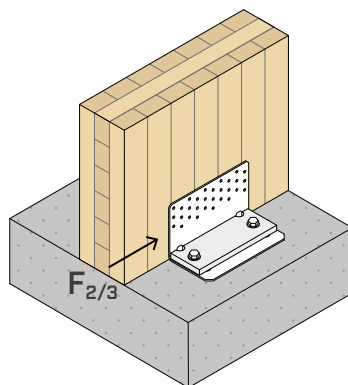

TIMBER STRENGTH

configuration on timber	fastening holes Ø5			R _{2/3,k} timber [kN]	K _{2/3,ser} [N/mm]
	type	Ø x L [mm]	n _V [pcs]		
TCN200 + TCW200	LBA	Ø4 x 60	30	56,7	9000
	LBS	Ø5 x 50		66,4	

CONCRETE STRENGTH

Strength values of some of the possible fastening solutions on concrete for anchors installed in internal holes (IN) with WASHER.

configuration on concrete	fastening holes Ø13			R _{2/3,d} concrete		
	type	Ø x L [mm]	n _H [pcs]	IN ⁽¹⁾ [kN]	e _{y,IN} [mm]	e _{z,IN} [mm]
uncracked	VIN-FIX 5.8	M12 x 140	2	27,4	38,5	83,5
	HYB-FIX 8.8	M12 x 195		41,5		
	SKR	12 x 110		15,4		
	AB1	M12 x 125		18,7		
cracked	VIN-FIX 5.8	M12 x 140		21,1		
	HYB-FIX 8.8	M12 x 195		41,8		
	AB1	M12 x 125		14,4		
seismic	HYB-FIX 8.8	M12 x 195		14,0		
	EPO-FIX 8.8	M12 x 195		17,2		

ANCHORS INSTALLATION PARAMETERS

installation	anchor type		t _{fix}	h _{ef}	h _{nom}	h ₁	d ₀	h _{min}	
	type	Ø x L [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
TCN200 + TCW200	VIN-FIX 5.8	M12 x 140	15	111	111	120	14	200	t _{fix} fastened plate thickness h _{nom} nominal anchoring depth h _{ef} effective anchoring depth h ₁ minimum hole depth d ₀ hole diameter in the concrete support h _{min} concrete minimum thickness
	HYB-FIX 8.8	M12 x 195	15	166	166	175	14		
	EPO-FIX 8.8	M12 x 195	15	166	166	175	14		
	SKR	12 x 110	15	64	95	115	10		
	AB1	M12 x 125	15	70	85	105	12		

Precut INA threaded rod, with nut and washer.


MGS threaded rod class 8.8 to be cut to size: for more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com

NOTES

⁽¹⁾ Installation of the anchors in the two internal holes (IN).

For the anchors verification refer to page 16.

For the GENERAL PRINCIPLES of calculation, see page 16.

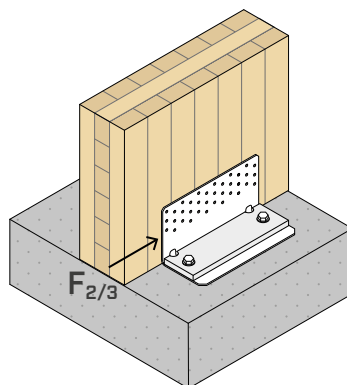

TIMBER STRENGTH

configuration on timber	fastening holes Ø5			$R_{2/3,k}$ timber [kN]	$K_{2/3,ser}$ [N/mm]
	type	Ø x L [mm]	n_V [pcs]		
TCN240 + TCW240	LBA	Ø4 x 60	36	70,5	9000
	LBS	Ø5 x 50		82.6	

CONCRETE STRENGTH

Strength values of some of the possible fastening solutions on concrete for anchors installed in internal holes (IN) with WASHER.

configuration on concrete	fastening holes Ø17			$R_{2/3,d}$ concrete		
	type	Ø x L [mm]	n_H [pcs]	IN ⁽¹⁾ [kN]	$e_{y,IN}$ [mm]	$e_{z,IN}$ [mm]
uncracked	VIN-FIX 5.8	M16 x 195	2	57,5	39,5	83.5
	HYB-FIX 8.8	M16 x 195		80,4		
	SKR	16 x 130		31,4		
	AB1	M16 x 145		42,4		
cracked	VIN-FIX 5.8	M16 x 195		32,2		
	HYB-FIX 8.8	M16 x 245		80,4		
	AB1	M16 x 145		30,3		
seismic	HYB-FIX 8.8	M16 x 245		23,9		
	EPO-FIX 8.8	M16 x 245		30,4		

ANCHORS INSTALLATION PARAMETERS

installation	anchor type		t_{fix}	h_{ef}	h_{nom}	h_1	d_0	h_{min}	
	type	Ø x L [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
TCN240 + TCW240	VIN-FIX 5.8	M16 x 195	15	160	160	165	18	200	t_{fix} fastened plate thickness h_{nom} nominal anchoring depth h_{ef} effective anchoring depth h_1 minimum hole depth d_0 hole diameter in the concrete support h_{min} concrete minimum thickness
	HYB-FIX 8.8	M16 x 195	15	160	160	165	18	200	
		M16 x 245	15	210	210	215	18	250	
	EPO-FIX 8.8	M16 x 245	15	210	210	215	18	250	
	SKR	16 x 130	15	85	115	145	14	200	
	AB1	M16 x 145	15	85	97	105	16	200	

Precut INA threaded rod, with nut and washer.


MGS threaded rod class 8.8 to be cut to size: for more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com

NOTES

⁽¹⁾ Installation of the anchors in the two internal holes (IN).

For the GENERAL PRINCIPLES of calculation, see page 16.

For the anchors verification refer to page 16.

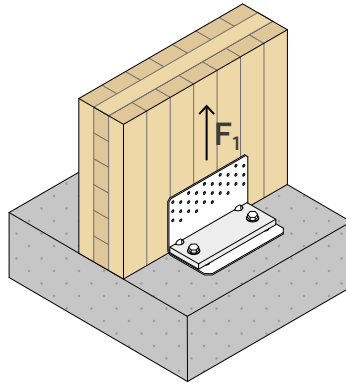

TIMBER STRENGTH

configuration on timber	TIMBER			STEEL		
	fastening holes Ø5			R _{1,k} steel		
	type	Ø x L [mm]	n _v [pcs]	R _{1,k} timber [kN]	[kN]	Y _{steel}
TCN200 + TCW200	LBA	Ø4 x 60	30	79,8	45,7	Y _{M0}
	LBS	Ø5 x 50		68,1		

CONCRETE STRENGTH

Strength values of some of the possible fastening solutions on concrete for anchors installed in internal holes (IN) with WASHER.

configuration on concrete	fastening holes Ø13			R _{1,d} concrete	
	type	Ø x L [mm]	n _H [pcs]	IN ⁽¹⁾ [kN]	k _{t//}
uncracked	VIN-FIX 5.8/8.8	M12 x 195	2	21,8	1,09
	HYB-FIX 8.8	M12 x 195		40,8	
cracked	HYB-FIX 5.8/8.8	M12 x 195		23,0	
	HYB-FIX 8.8	M12 x 245		30,6	
seismic	EPO-FIX 8.8	M12 x 195		14,0	
	EPO-FIX 8.8	M12 x 245		18,5	

ANCHORS INSTALLATION PARAMETERS

installation	anchor type		t _{fix}	h _{ef}	h _{nom}	h ₁	d ₀	h _{min}		
	type	Ø x L [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
TCN200 + TCW200	VIN-FIX 5.8/8.8	M12 x 195	15	160	160	165	14	200	t _{fix}	fastened plate thickness
	HYB-FIX 5.8/8.8								h _{nom}	nominal anchoring depth
	EPO-FIX 8.8								h _{ef}	effective anchoring depth
	HYB-FIX 8.8	M12 x 245	15	210	210	215	14	250	h ₁	minimum hole depth
	HYB-FIX 8.8								d ₀	hole diameter in the concrete support
	EPO-FIX 8.8								h _{min}	concrete minimum thickness

Precut INA threaded rod, with nut and washer.


MGS threaded rod class 8.8 to be cut to size: for more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com

NOTES

⁽¹⁾ Installation of the anchors in the two internal holes (IN).

For the GENERAL PRINCIPLES of calculation, see page 16.

For the anchors verification refer to page 16.

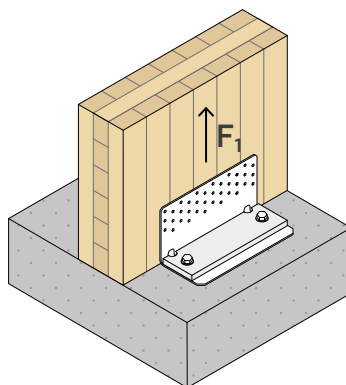

TIMBER STRENGTH

configuration on timber	TIMBER			STEEL		
	fastening holes Ø5			$R_{1,k}$ steel		
	type	Ø x L [mm]	n_V [pcs]	$R_{1,k}$ timber [kN]	[kN]	Y_{steel}
TCN240+TCW240	LBA	Ø4 x 60	36	95,8	69,8	Y_{M0}
	LBS	Ø5 x 50		81,7		

CONCRETE STRENGTH

Strength values of some of the possible fastening solutions on concrete for anchors installed in internal holes (IN) with WASHER.

configuration on concrete	fastening holes Ø17			$R_{1,d}$ concrete	
	type	Ø x L [mm]	n_H [pcs]	IN ⁽¹⁾ [kN]	$k_{t//}$
uncracked	VIN-FIX 5.8/8.8	M16 x 195	2	27,4	1,08
	HYB-FIX 5.8/8.8	M16 x 195		45,7	
cracked	HYB-FIX 5.8/8.8	M16 x 195		31,2	
	HYB-FIX 5.8/8.8	M16 x 245		42,2	
seismic	HYB-FIX 8.8	M16 x 330		21,1	
	EPO-FIX 8.8	M16 x 245		19,8	
	EPO-FIX 8.8	M16 x 330		28,1	

ANCHORS INSTALLATION PARAMETERS

installation	anchor type		t_{fix}	h_{ef}	h_{nom}	h_1	d_0	h_{min}	
	type	Ø x L [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
TCN240 + TCW240	VIN-FIX 5.8/8.8	M16 x 195	15	160	160	165	18	200	t_{fix} fastened plate thickness h_{nom} nominal anchoring depth h_{ef} effective anchoring depth h_1 minimum hole depth d_0 hole diameter in the concrete support h_{min} concrete minimum thickness
		M16 x 195	15	160	160	165	18	200	
	HYB-FIX 5.8/8.8	M16 x 245	15	210	210	215	18	250	
		M16 x 330	15	295	295	300	18	350	
	EPO-FIX 8.8	M16 x 245	15	210	210	215	18	250	
		M16 x 330	15	295	295	300	18	350	

Precut INA threaded rod, with nut and washer.

MGS threaded rod class 8.8 to be cut to size: for more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com


NOTES

⁽¹⁾ Installation of the anchors in the two internal holes (IN).

For the GENERAL PRINCIPLES of calculation, see page 16.

For the anchors verification refer to page 16.


■ STRUCTURAL VALUES | TTN240 | TIMBER-TO-TIMBER | $F_{2/3}$

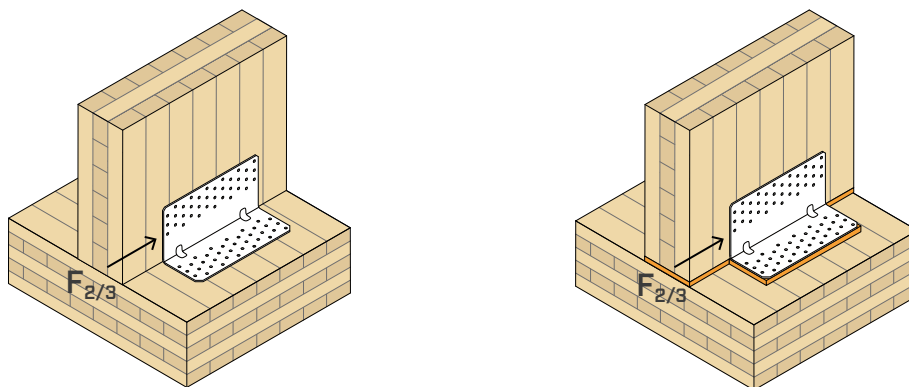

TIMBER STRENGTH

configuration on timber	type	fastening holes Ø5			profile s [mm]	$R_{2/3,k}$ timber [kN]	$K_{2/3,ser}$ [N/mm]
		Ø x L [mm]	n_V [pcs]	n_H [pcs]			
TTN240	LBA	Ø4 x 60	36	36	-	51,3	11000
	LBS	Ø5 x 70				58,0	
TTN240 + XYLOFON	LBA	Ø4 x 60	36	36	6	41,7	9000
	LBS	Ø5 x 70				43,8	

■ STRUCTURAL VALUES | TTN240 | TIMBER-TO-TIMBER | F_1



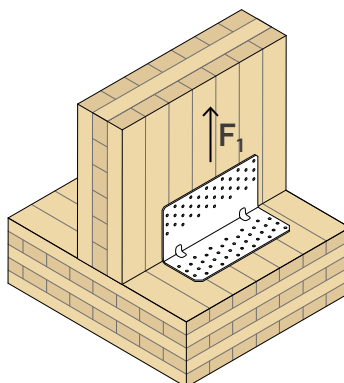


TIMBER STRENGTH

configuration on timber	type	fastening holes Ø5			$R_{1,k}$ timber [kN]
		Ø x L [mm]	n_V [pcs]	n_H [pcs]	
TTN240	LBA	Ø4 x 60	36	36	7,4
	LBS	Ø5 x 70			16,2

NOTES

For the GENERAL PRINCIPLES of calculation, see page 16.

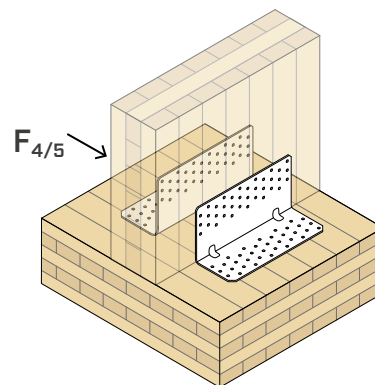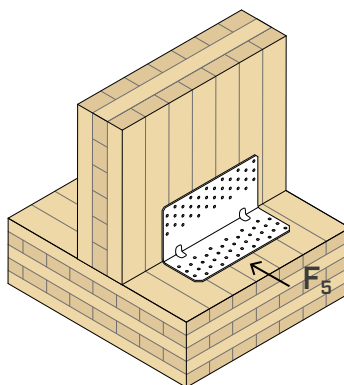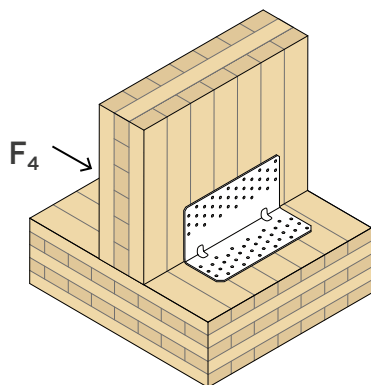

F_4		TIMBER				STEEL	
		fastening holes Ø5			$R_{4,k}$ timber	$R_{4,k}$ steel	
		type	Ø x L [mm]	n_V [pcs]	[kN]	[kN]	Y_{steel}
TTN240	full pattern	LBA	Ø4 x 60	36 + 36	23,8	31,1	Y_{M0}
		LBS	Ø5 x 70				

F_5		TIMBER				STEEL	
		fastening holes Ø5			$R_{5,k}$ timber	$R_{5,k}$ steel	
		type	Ø x L [mm]	n_V [pcs]	[kN]	[kN]	Y_{steel}
TTN240	full pattern	LBA	Ø4 x 60	36 + 36	7,3	3,4	Y_{M0}
		LBS	Ø5 x 70				

$F_{4/5}$ TWO ANGLE BRACKETS		TIMBER				STEEL	
		fastening holes Ø5			$R_{4/5,k}$ timber	$R_{4/5,k}$ steel	
		type	Ø x L [mm]	n_V [pcs]	[kN]	[kN]	Y_{steel}
TTN240	full pattern	LBA	Ø4 x 60	72 + 72	26,7	31,6	Y_{M0}
		LBS	Ø5 x 70				

NOTES

- The F_4 , F_5 , $F_{4/5}$ values in the table are valid for the calculation eccentricity $e=0$ (timber elements prevented from rotating).

For the GENERAL PRINCIPLES of calculation, see page 16.

ANCHORS VERIFICATION FOR STRESS LOADING $F_{2/3}$


Fastening elements to the concrete through anchors shall be verified according to the load acting on the anchor, which can be evaluated through the tabulated geometric parameters (e).

e_y calculation eccentricities vary depending on the type of installation selected: 2 internal anchors (IN) or 2 external anchors (OUT).

The anchor group must be verified for:

$$V_{Sd,x} = F_{2/3,d}$$

$$M_{Sd,z} = F_{2/3,d} \cdot e_{y,IN/OUT}$$

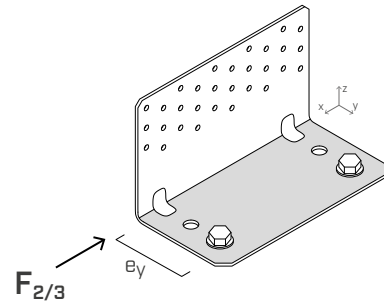

ANCHORS VERIFICATION FOR STRESS LOADING $F_{2/3}$ WITH WASHER

Fastening elements to the concrete through anchors shall be verified according to the load acting on the anchor, which can be evaluated through the tabulated geometric parameters (e).


The calculation eccentricities e_y and e_z refer to installation with WASHER TCW of 2 internal anchors (IN).

The anchor group must be verified for:

$$V_{Sd,x} = F_{2/3,d}$$

$$M_{Sd,z} = F_{2/3,d} \cdot e_{y,IN}$$

$$M_{Sd,y} = F_{2/3,d} \cdot e_{z,IN}$$

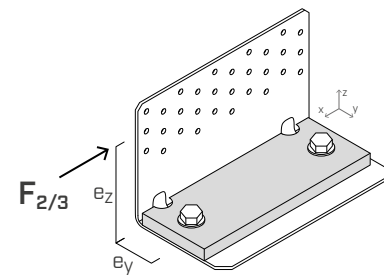


ANCHORS VERIFICATION FOR STRESS LOADING F_1 WITH WASHER

Fastening elements to the concrete through anchors shall be verified according to the load acting on the anchor, which can be evaluated through the tabulated geometric parameters (k_t).

2 internal anchors (IN) must be provided for installation on concrete with WASHER TCW.

The anchor group must be verified for:

$$N_{Sd,z} = 2 \times k_{t//} \cdot F_{1,d}$$



GENERAL PRINCIPLES

- Characteristic values comply with the EN 1995:2014 standard in accordance with ETA-11/0496.
- Design values can be obtained from characteristic values as follows:

$$R_d = \min \left\{ \begin{array}{l} \frac{R_{k, \text{timber}} \cdot k_{mod}}{\gamma_M} \\ \frac{R_{k, \text{steel}}}{\gamma_{M0}} \\ R_{d, \text{concrete}} \end{array} \right.$$

The coefficients k_{mod} , γ_M and γ_{M0} should be taken according to the current regulations used for the calculation.

- Dimensioning and verification of timber and concrete elements must be carried out separately. Verify that there are no brittle failures before reaching the connection strength.
- Structural elements in timber, to which the connection devices are fastened, must be prevented from rotating.
- A timber density of $\rho_k = 350 \text{ kg/m}^3$ was considered for the calculation process. For higher ρ_k values, the strength on timber side can be converted by the k_{dens} value:


$$k_{dens} = \left(\frac{\rho_k}{350} \right)^{0.5} \quad \text{for } 350 \text{ kg/m}^3 \leq \rho_k \leq 420 \text{ kg/m}^3$$

$$k_{dens} = \left(\frac{\rho_k}{350} \right)^{0.5} \quad \text{for LVL with } \rho_k \leq 500 \text{ kg/m}^3$$

- In the calculation phase, a strength class of C25/30 concrete with thin reinforcement was considered, in the absence of spacing and distances from the edge and minimum thickness indicated in the tables listing the installation parameters of the anchors used. The strength values are valid for the calculation hypothesis defined in the table; for boundary conditions different from the ones in the table (e.g. minimum distances from the edge or different concrete thickness), the concrete-side anchors can be verified using MyProject calculation software according to the design requirements.
- Seismic design in performance category C2, without ductility requirements on anchors (option a2) and elastic design according to EN 1992:2018. For chemical anchors subjected to shear stress it is assumed that the annular space between the anchor and the plate hole is filled ($\alpha_{gap}=1$).
- The product ETAs for the anchors used in the concrete-side strength calculation are indicated below:
 - VIN-FIX chemical anchor according to ETA-20/0363;
 - HYB-FIX chemical anchor according to ETA-20/1285;
 - EPO-FIX chemical anchor according to ETA-23/0419;
 - SKR screw-in anchor according to ETA-24/0024;
 - AB1 mechanical anchor according to ETA-25/0860 (M12);
 - AB1 mechanical anchor according to ETA-99/0010 (M16).

UK CONSTRUCTION PRODUCT EVALUATION

- UKTA-0836-22/6373.

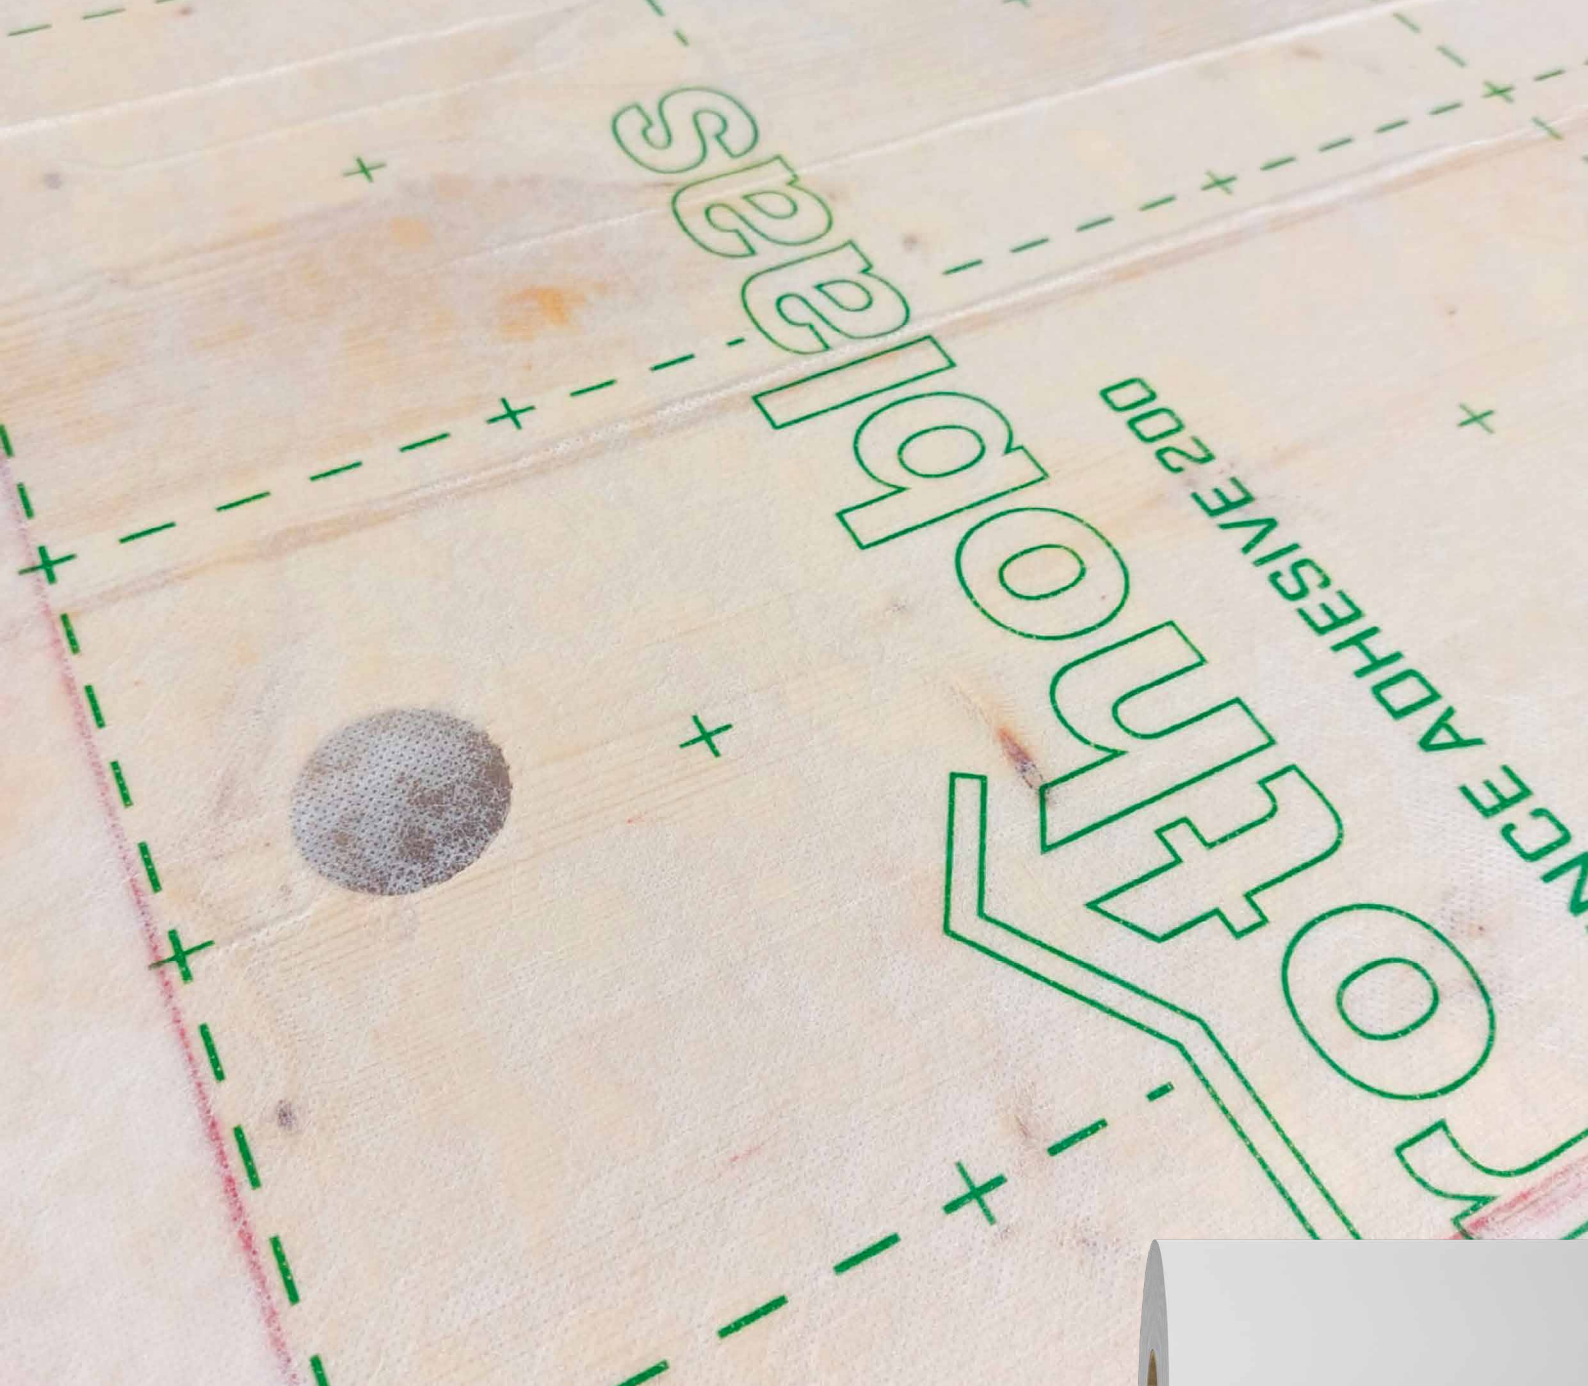

Transparent, self-adhesive, protective

DEFENCE ADHESIVE 200 is the self-adhesive membrane that protects **timber building elements**. Extremely transparent and durable, it provides 12-week protection against water, rubbing and dust.

It can be repositioned and reapplied in the event of an error, making the work of professionals who install it off-site or on site easier.

Choose efficient and reliable solutions, choose self-adhesive membranes from Rothoblaas:



rothoblaas.com



rothoblaas

Solutions for Building Technology

