


XYLOFON WASHER

ARANDELA DE DESACOPLE
PARA ANGULAR WHT

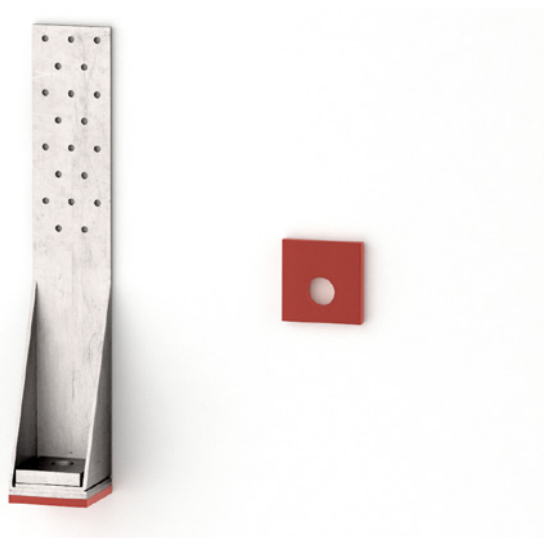

CÓDIGOS Y DIMENSIONES

XYLOFON WASHER

CÓDIGO	cód. WHT	Ø [mm]	P [mm]	B [mm]	s [mm]	un.
XYLW806060	WHT340	23	60	60	6,0	10
	WHT440					
	WHT540					
XYLW808080	WHT620	27	80	80	6,0	10
XYLW8080140	WHT740	30	80	140	6,0	1

WHT - ANGULAR DE TRACCIÓN

CÓDIGO	cód. WHTW	H [mm]	Ø [mm]	n Ø5 [un.]	s [mm]	un.
WHT340	WHTW50	340	18	20	3,0	10
WHT440	WHTW50L	440	18	30	3,0	10
WHT540	WHTW70	540	22	45	3,0	10
WHT620	WHTW70L	620	26	55	3,0	10
WHT740	WHTW130	740	29	75	3,0	1



MATERIAL Y DURABILIDAD

Mezcla de poliuretano (80 shore). Producto exento de VOC (COV) o sustancias nocivas. Muy estable químicamente y sin deformaciones con el paso del tiempo.

CAMPOS DE APLICACIÓN

Desolarización mecánica de uniones de tracción madera - madera realizadas con WHT