


## VIJAK ZA GIPSKARTONSKE PLOČE

### OPTIMALNA GEOMETRIJA

Trubasta glava i fosfatirani čelik; idealan je za pričvršćivanje gipskartonskih ploča.

### NAVOJ USKOG KORAKA

Vijak finog navoja idealan za pričvršćivanja na limene podloge.

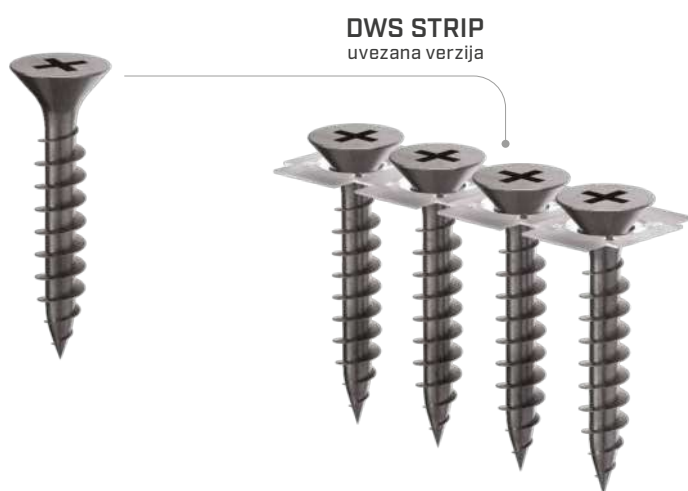


## KODOVI I DIMENZIJE

### DWS - rasuti vijci



| d <sub>1</sub><br>[mm] | KOD      | L<br>[mm] | opis                | kom. |
|------------------------|----------|-----------|---------------------|------|
| 3,5<br>PH 2            | FE620001 | 25        | limena podstruktura | 1000 |
|                        | FE620005 | 35        |                     | 1000 |
|                        | FE620010 | 45        |                     | 500  |
|                        | FE620015 | 55        |                     | 500  |
| 4,2<br>PH 2            | FE620020 | 65        | limena podstruktura | 200  |


### DWS STRIP - uvezani vijci



| d <sub>1</sub><br>[mm] | KOD        | L<br>[mm] | opis                                 | kom.  |
|------------------------|------------|-----------|--------------------------------------|-------|
| 3,9<br>PH 2            | HH10600404 | 30        | drvena podstruktura                  | 10000 |
|                        | HH10600405 | 35        |                                      | 10000 |
|                        | HH10600406 | 45        |                                      | 10000 |
| 3,9<br>PH 2            | HH10600401 | 30        | limena potkonstrukcija<br>maks. 0,75 | 10000 |
|                        | HH10600402 | 35        |                                      | 10000 |
|                        | HH10600403 | 45        |                                      | 10000 |
| 3,9<br>PH 2            | HH10600397 | 30        | fermacell                            | 10000 |
|                        | HH10600398 | 35        |                                      | 10000 |

Kompatibilni s pištoljem HH3371 za čavle, vidi str.405.

### GEOMETRIJA



### PROMJER [mm]

3,5 **3,5** 4 12

### DUŽINA [mm]

25 **25** 65 200

### UPORABNA KLASA

SC1

### ATMOSFERSKA KOROZIJA

C1

### KOROZIVNOST DRVA

T1

### MATERIJAL



fosfatirani ugljični čelik