

I H-RAIL + SOLID

RAIL SYSTEM ON RIGID SUPPORT FOR ROPE ACCESS WORK

DESIGNED FOR ROPE ACCESS WORK

The high-rigidity and high-strength support, combined with the multiple anchor plate, ensures safety and comfort during rope access work.

LIGHT

Made from aluminium alloy, the lightweight support is easy to handle and install.

ADAPTABLE

Available in heights between 400 and 1000 mm, it adapts to different roofing thicknesses.

EN
795:2012
A+D

CEN/TS
18415:2013

AS/NZS
1891.2:2001



MAXIMUM NUMBER
OF USERS



LOAD DIRECTION



TYPES OF
APPLICATION



MY
PROJECT
SAFETY




BIM




VIDEO




MANUALS

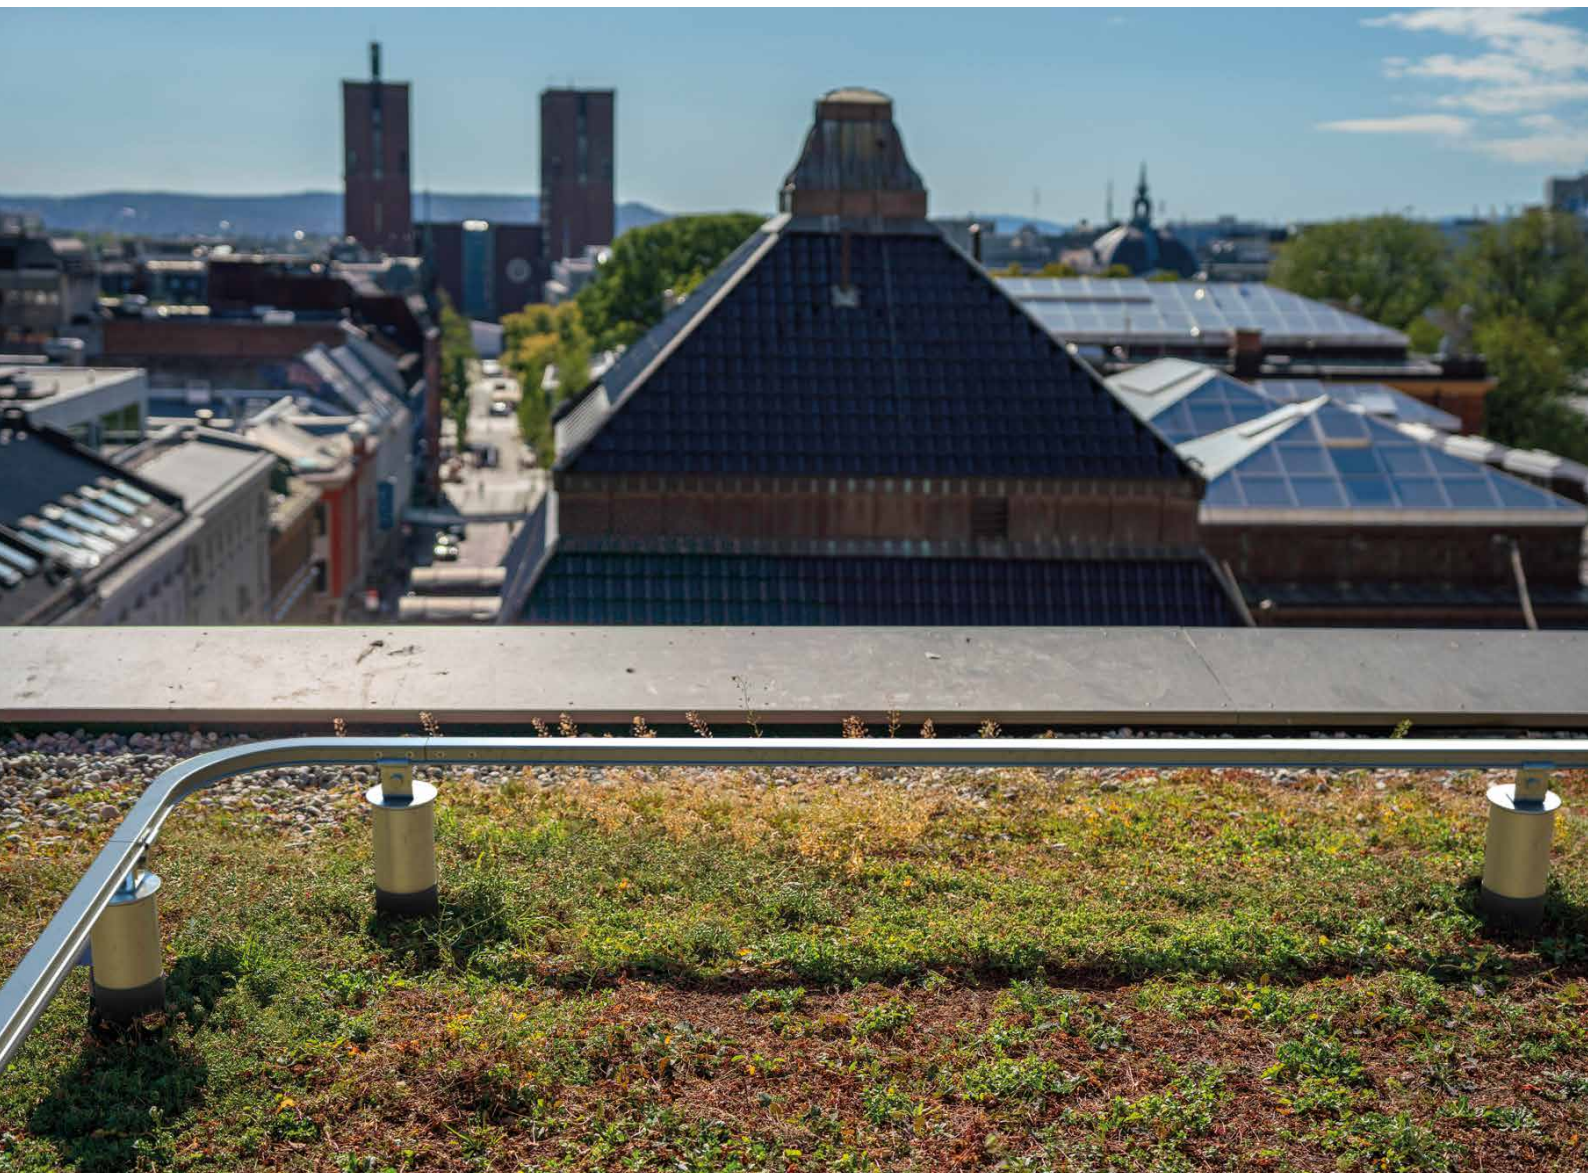



(1) Applicable to EN 795 A and CEN/TS 16415
(2) Applicable up to SOLID800.



***The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*



For SOLID components, see page pagina 10.