

SIANK


ANCHOR POINT FOR STANDING SEAM METAL ROOFS

EFFICIENT

The system is fixed to a single seam of the sheet using a few tools.

PRACTICAL

Device fixed to the seam by means of a single clamp, without the need to drill holes in the metal sheet, guaranteeing its impermeability and durability.

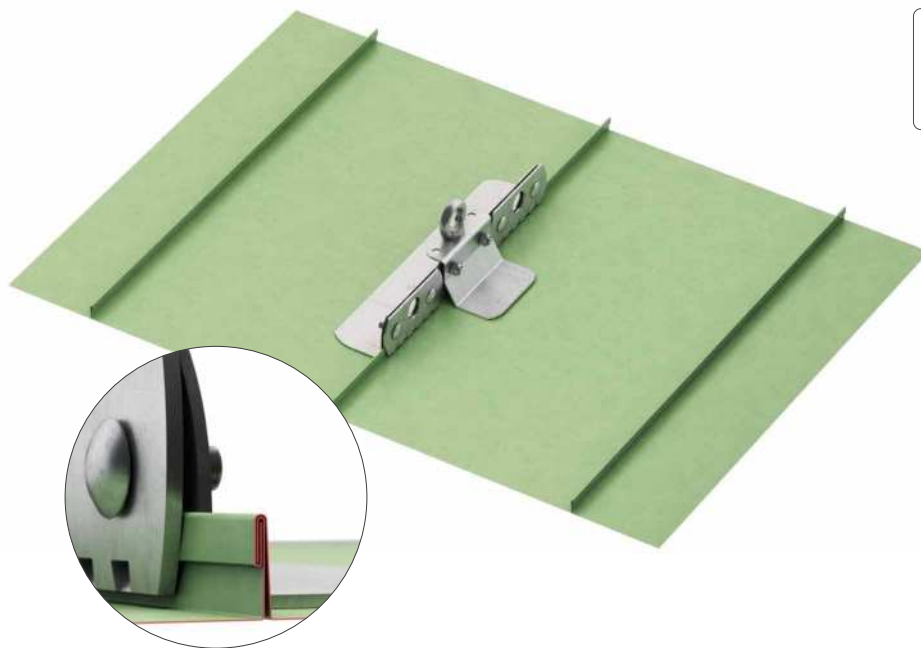

EN
795:2012
A

CEN/TS
18419:2013

UNI
11578:2015
A

MAXIMUM NUMBER OF USERS



LOAD DIRECTION



TYPES OF APPLICATION




MY
PROJECT
SAFETY



VIDEO



MANUALS

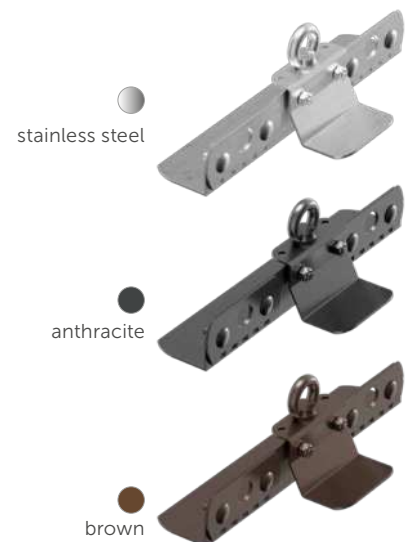

stainless steel

anthracite

brown

TECHNICAL DATA*

substructure	minimum thickness
 Fe	0,5 mm
 Al	0,7 mm
 Cu	0,5 mm

substructure	minimum thickness
 Zn - Ti	0,7 mm
 STAINLESS STEEL	0.4 mm

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standards referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

CODES AND DIMENSIONS

CODE	material	colour	seam height [mm] [in]	B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs
SIANK	AISI 304 stainless steel grade 1.4301	 (stainless steel)	25 1	163 6 7/16	130 5 1/8	400 15 3/4	1
SIANK65			65 2 9/16	104 4 1/8	163 6 7/16	400 15 3/4	1
SIANKA		 (anthracite)	25 1	163 6 7/16	130 5 1/8	400 15 3/4	1
SIANKB			25 1	163 6 7/16	130 5 1/8	400 15 3/4	1

