



Product Service

EC-Type Examination Certificate

No. P5 13 04 78362 002

Holder of Certificate: Rothoblaas GmbHvia dell'Adige 2/1
39040 Cortaccia
ITALY**Product:** PPE against fall from a height
Anchor Devices, EN 795 A**Model(s):** KITE

Parameters:

Construction:	Anchor point for 1 person, made of 1.4016 – AISI 430 stainless steel (l x w x h 100mm x 100mm x 39mm), with a depth of 3 mm; including one 50mm x 27,50mm hole as anchor point for 1 person;
More Parameters:	see Annex

This EC-Type Examination Certificate is issued according to Article 10 of Council Directive 89/686/EEC for personal protective equipment as classified in Article 8 (PPE of category 3). It confirms that the listed product fulfills the basic requirements as specified in Annex II of the Directive. This certificate refers only to the sample submitted to TÜV SÜD Product Service GmbH for testing and certification and on its technical documentation. See also notes overleaf.

Test report no.: 713019357/2**Valid until:** 2018-04-23**Date,** 2013-04-24
(Volker Kron)

TÜV SÜD Product Service GmbH is Notified Body according to Council Directive 89/686/EEC for personal protective equipment, notified by publication in the Official Journal of the EC No. C 203/44 dated July 07th, 1994 with identification No. 0123.

Page 1 of 2

Annex to

EC-Type Examination Certificate

No. P5 13 04 78362 002

Anchor point, type KITE:


Versions & Fixation:

installation on:

- wood (GL24h or better; at least 100x100mm according to EN 14080) over 2 pc. HBS wood screws ($\varnothing$ 8mm; length 100-500mm; with or without washer) on the left and right hole of AP and over 1 VGS ($\varnothing$ 11mm; length 100-600mm; with or without washer) in the middle of the 3 holes;
 - concrete (C20/25 S3 X0 0-16; with reinforcement S235 JR; at least 140mm thick) over 1 pc. AB 1 concrete anchor for cracked and non-cracked concrete (FE210440; 12 x 103mm or longer) in the middle of the 3 holes; distance of fixation of AP to the edge at least 105 mm; fixation torque 50Nm;
 - on steel (S235JR or better; at least 5mm thick) over 1 stainless steel screw (M12; 8.8 DIN ISO 20898 and 898-6; with self-locking screw-nut) in the middle of the 3 holes; distance of fixation of AP to the edge at least 25 mm;
- type; manufacturing year; manufacturer;
"read instruction"-pictogram; serial no.; EN 795/A:2012;
CE-marking; max. 1 person;

Marking:

Weight:

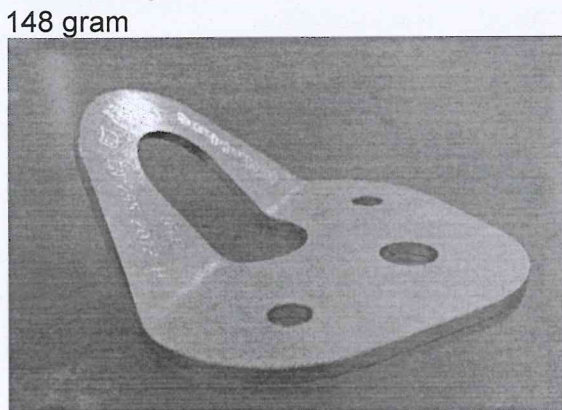

Department:
Date:

DEMUCMES / vm
2013-04-24

Page 2 of 2