

I CAGE LADDERS

UNI EN
14122-4

CAGED LADDERS

DURABLE

Made of aluminium alloy, they offer high mechanical resistance and resist corrosion and weather.

GEOMETRY

Designed to make installation easy and support ergonomics during use. The profiles are designed to enhance the properties of the materials used.

RELIABLE

Guarantee the utmost safety for the user and give the installer the serenity that comes with a reliable product.

ADAPTABLE

Ladder components are designed to adjust to any type of installation.


STANDARD COMPONENTS

All elements are designed to be easily replaced if necessary.



I CODES AND DIMENSIONS

Caged ladders are available in standard 2 and 3 m modules and in starting modules that can be personalised based on requirements.

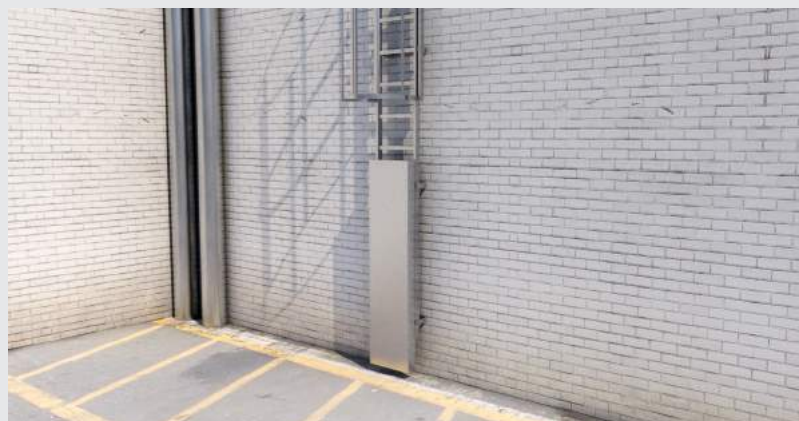

< SAFE

All ladders come with a standard protective cage.

COMPLETE >

The ladder is provided with landing handles and 1,10 m terminal protection to ensure the worker can safely dismount.




MATERIAL

Heavy-duty aluminium alloy
stainless steel.


FIELD OF USE

Access to roofs, silos, machinery and other entries.

GEOMETRY

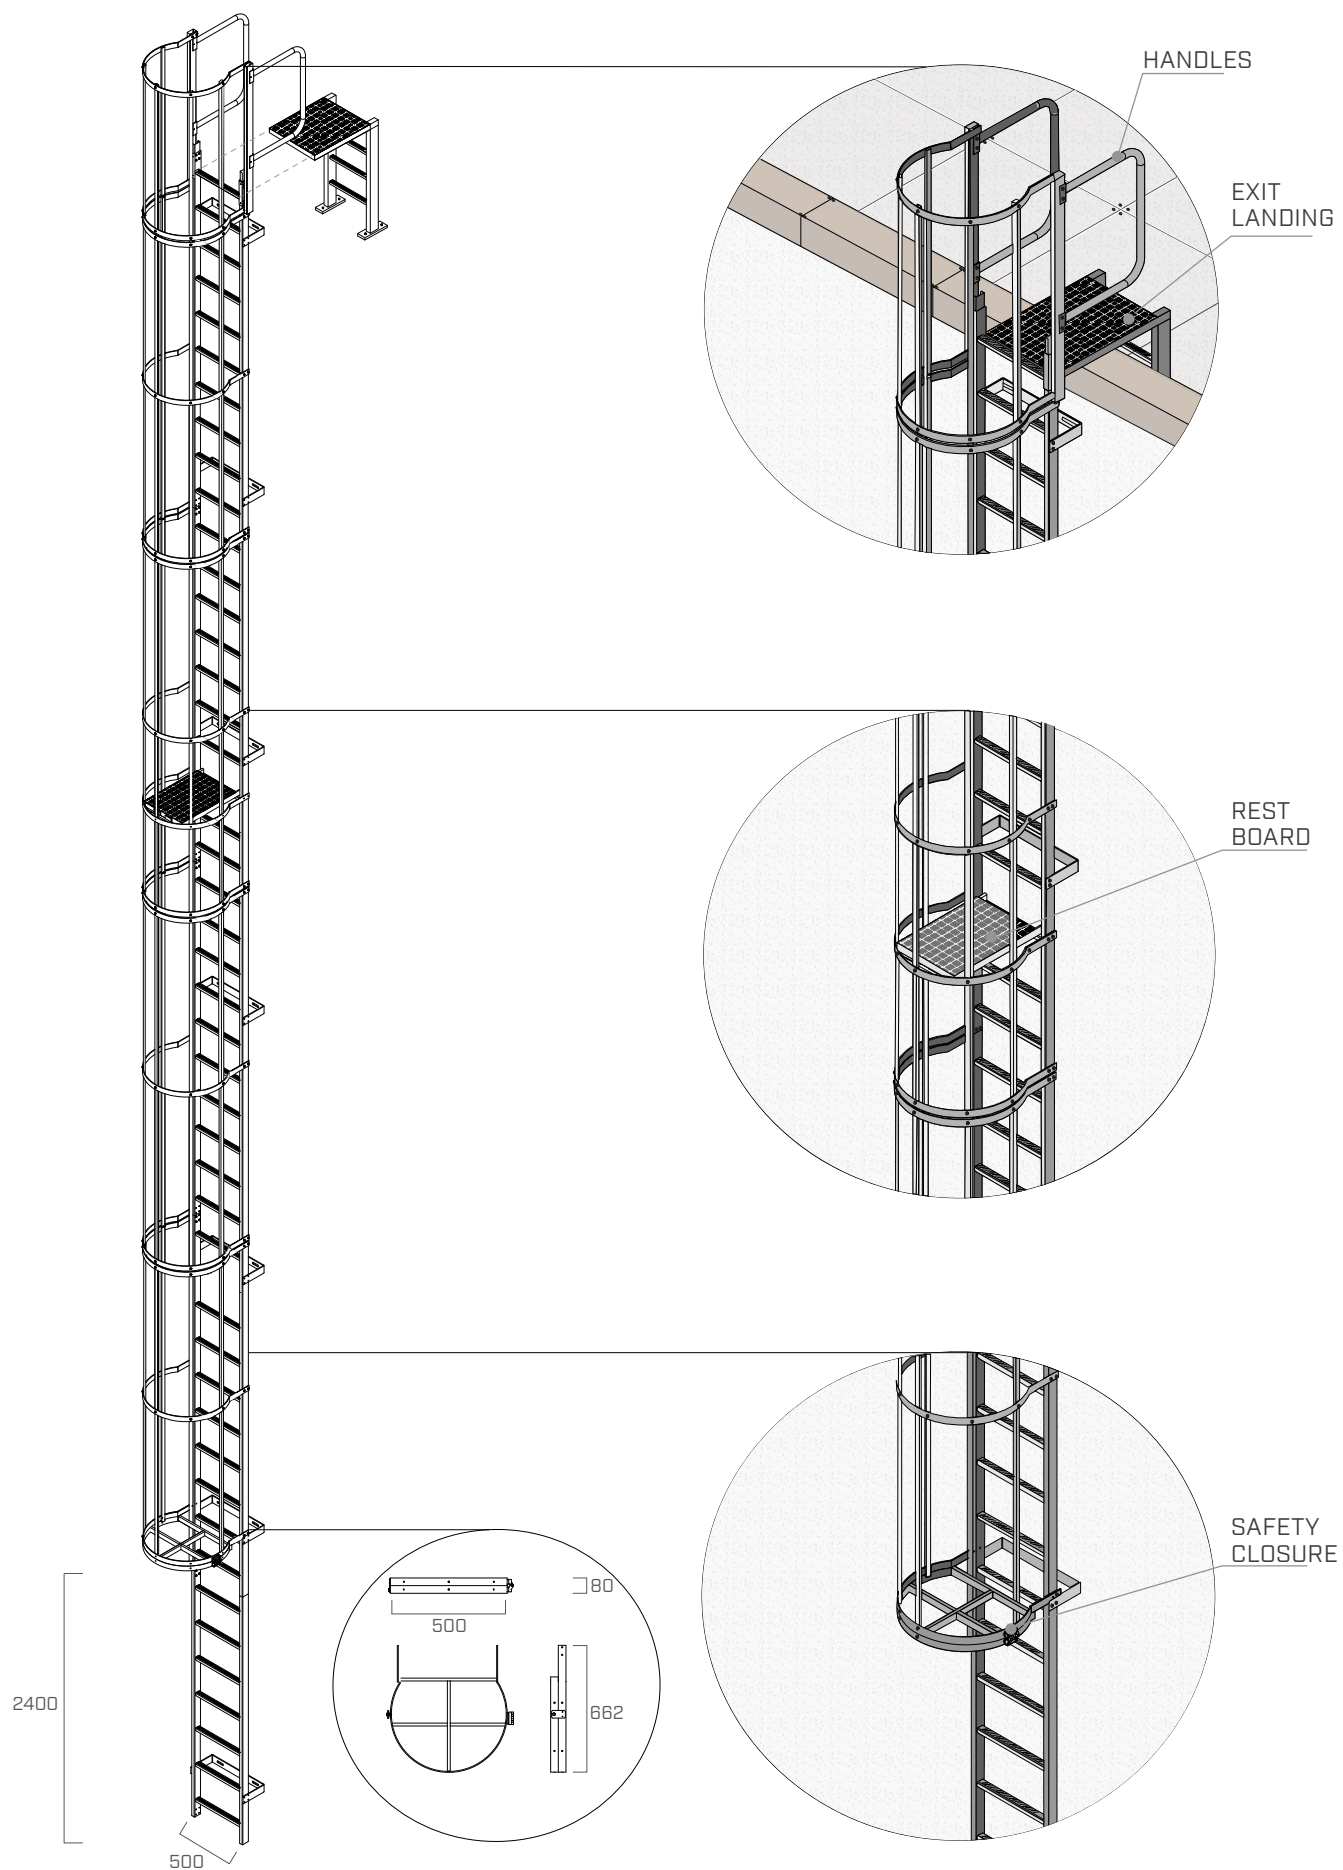

GEOMETRY

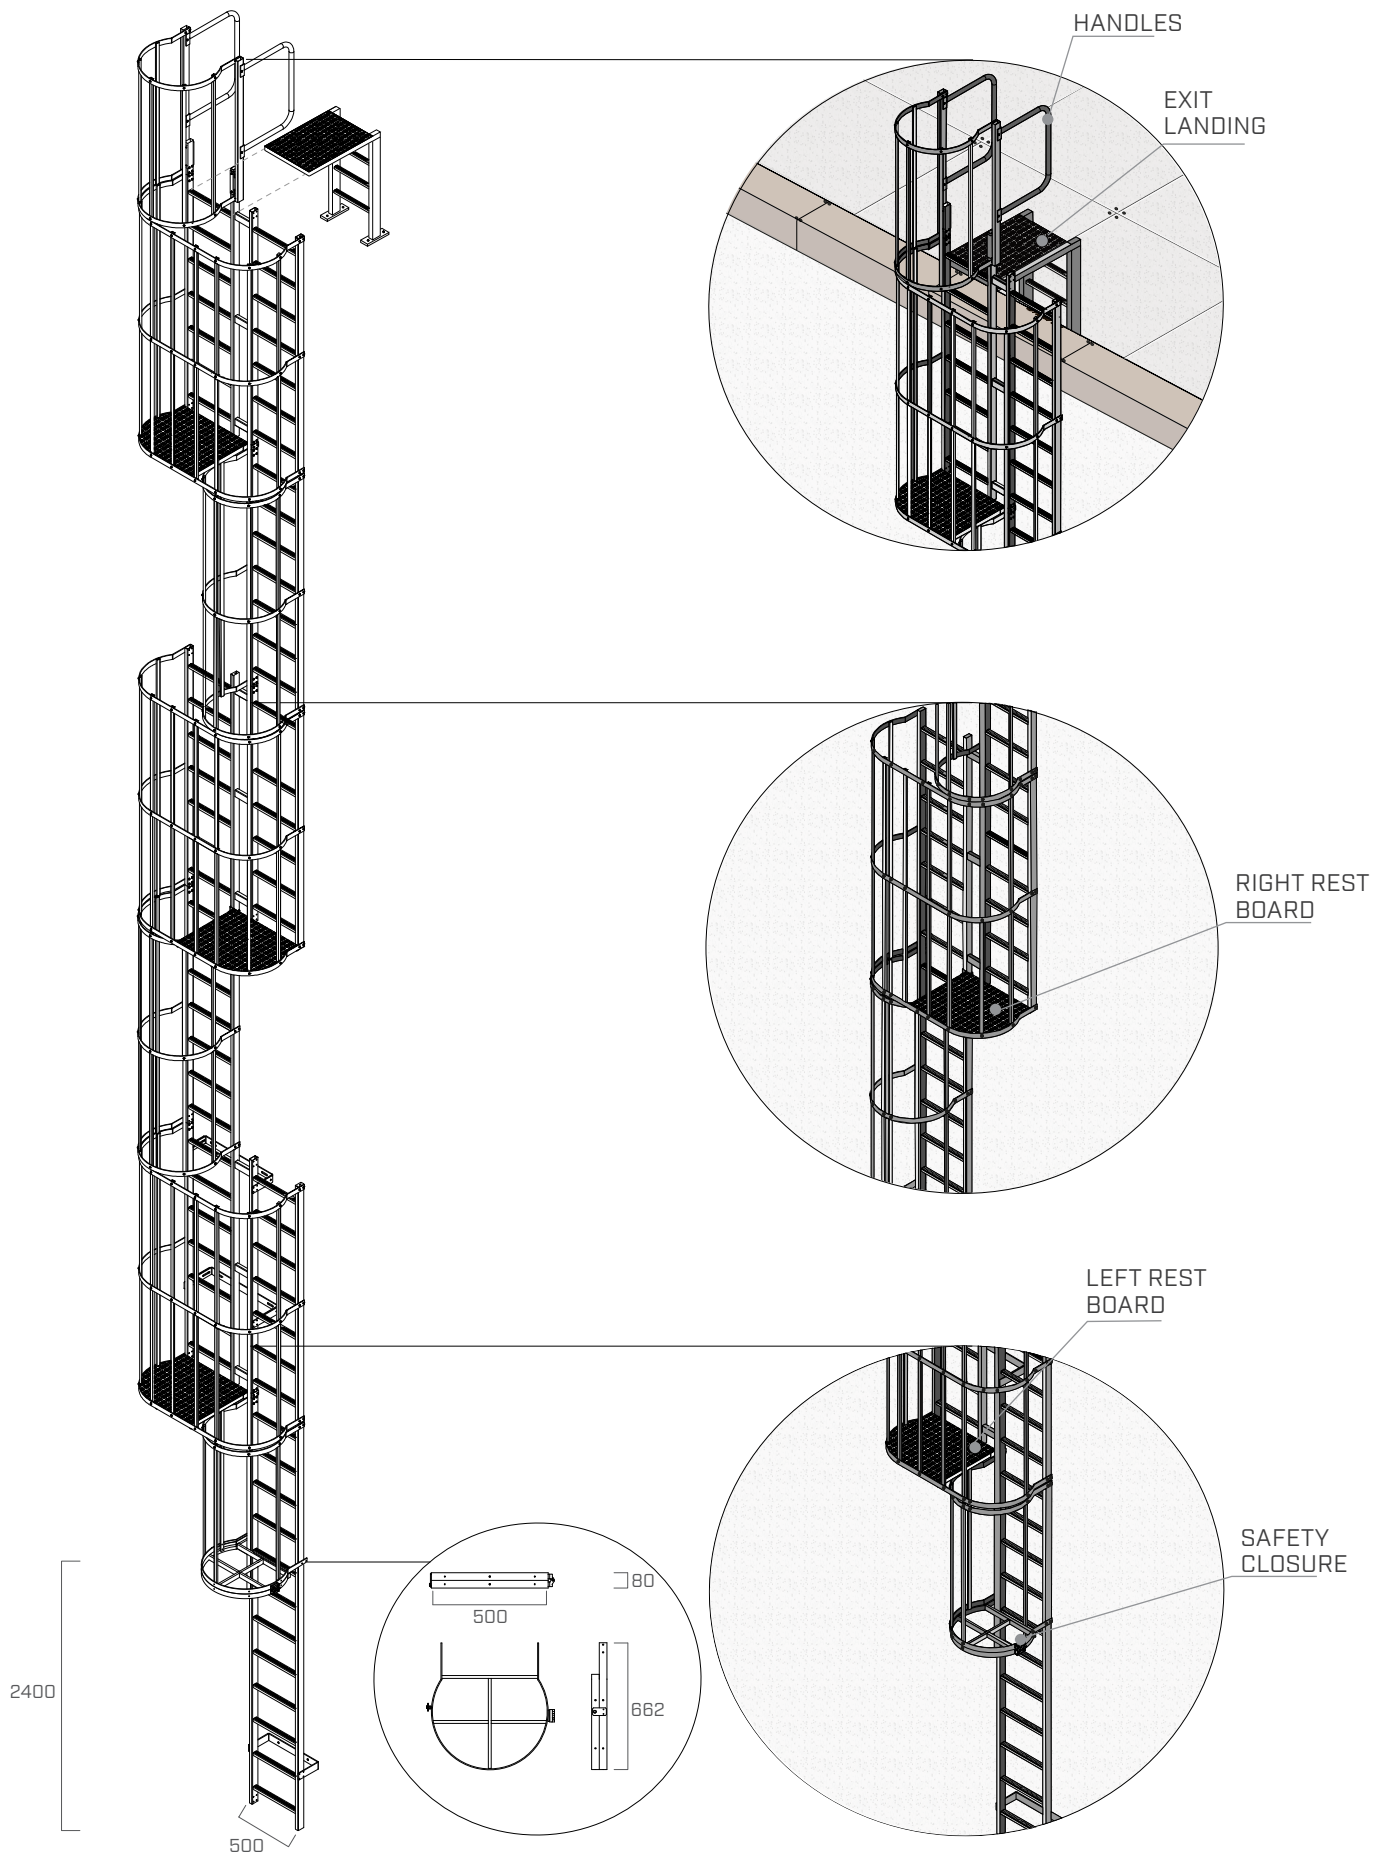



Caged ladders complete with rest board



Caged ladder with side exit landing



Special assembly of a caged ladder



Folding rest board, to divide the ladder