


TERMI FLOOR



Waterproof anti-termite barrier for foundations

Single layer of low density polyethylene (LDPE)

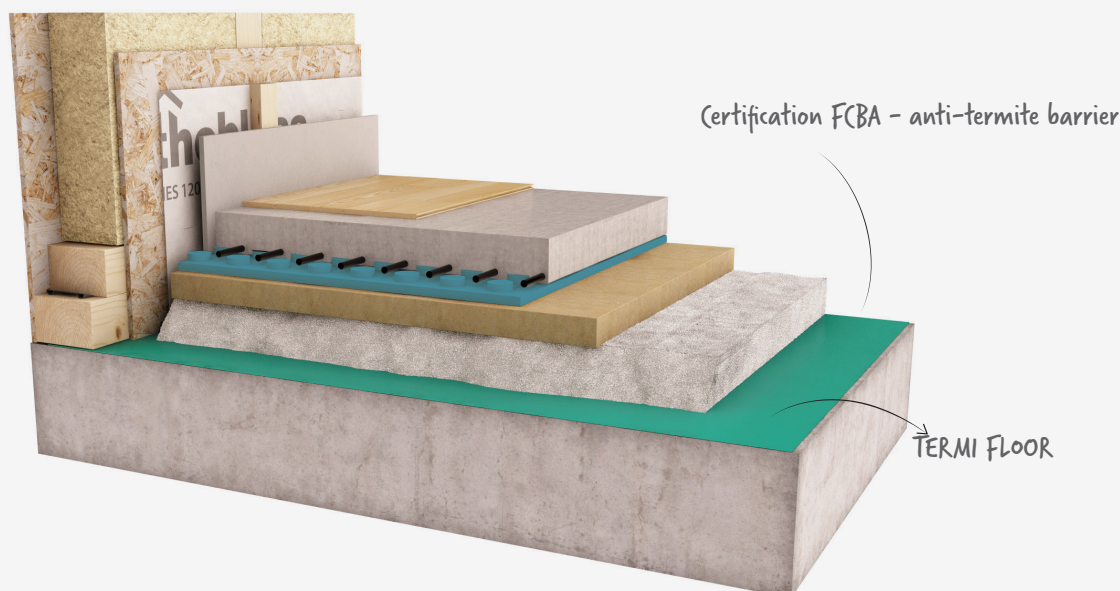

TECHNICAL SPECIFICATIONS

property	standard	value
Mass per unit area	EN 1849-2	150 g/m ²
Thickness	EN 1849-2	0.35 mm
Straightness	EN 1848-2	conforming
Water vapour transmission (Sd)	EN 1931 / EN ISO 12572	232 m
Maximum tensile force MD/CD	EN 12311-1	450 / 420 N/50 mm
Elongation MD/CD	EN 12311-1	12 / 12 %
Resistance to tearing MD/CD	EN 12310-1	300 / 300 N
Watertightness	EN 1928	conforming
Temperature resistance	-	-40 / +80 °C
Static punching shear	-	200 N
Impact resistance	-	200 mm
Joint strength	EN 13501-1	> 60 N
Compatibility with bitumen	-	compatible

NOTE: Avoid contact with the skin. Do not store near food or other items for ingestion

COMPOSITION




① single layer: special green LDPE layer

CODES AND DIMENSIONS

code	ex code	description	roll [m]	H x L [m]	A [m ²]	pcs/
TERMI75	D45307	TERMI FLOOR 75 mq	1.25 x 12.5	6.0 x 12.5	75	48
TERMI150	D45308	TERMI FLOOR 150 mq	1.65 x 25	6.0 x 25	150	36

WHERE CAN IT
BE APPLIED?



INSTALLATION INSTRUCTIONS TERMI FLOOR

