


# PROTECT

Self-adhesive butyl band, can be plastered

Adhesive butyl compound with polypropylene (PP) fabric support, and separation layer

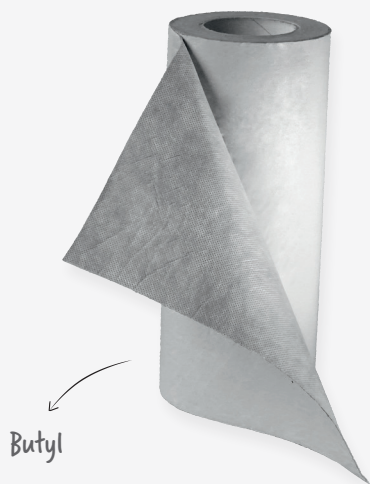


## BUTYL MIX

The special mix guarantees excellent adhesiveness and deformation capabilities, compensating for the natural movement of the wood



## LOW TEMPERATURES

The butyl guarantees excellent adhesion to the supports under difficult environmental conditions

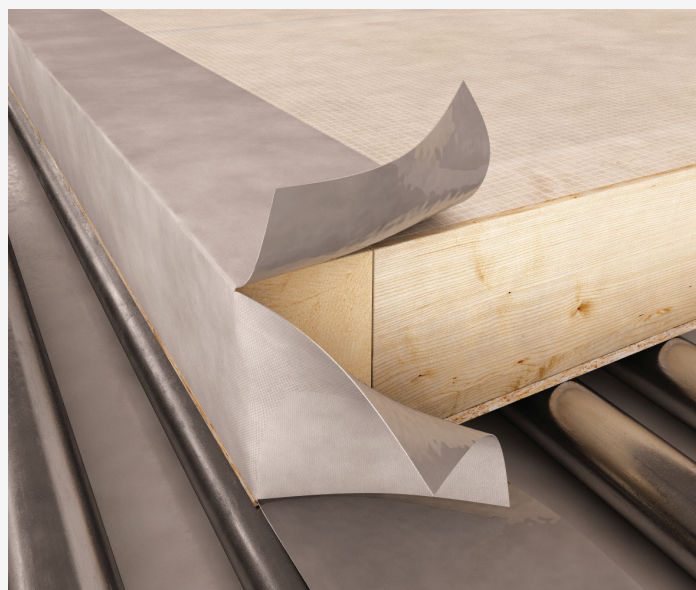

## TECHNICAL SPECIFICATIONS

| property                                   | standard                | value                 |
|--------------------------------------------|-------------------------|-----------------------|
| Thickness                                  | -                       | 1 mm                  |
| Maximum tensile force MD/CD                | EN 12311-1              | 140 / 105 N/50 mm     |
| Elongation at break point MD/CD            | EN 12311-1              | 100 / 100 %           |
| Application temperature                    | -                       | 0 / +40 °C            |
| Temperature resistance                     | -                       | -30 / +90 °C          |
| Adhesion of C2E cement adhesive on Protect | EN 12004 / EN1348       | 0.9 N/mm <sup>2</sup> |
| Detachment adhesion at 180°                | ASTM D 1000             | 90 N/50 mm            |
| Reaction to fire                           | EN 11925-2 / EN 13501-1 | class E               |
| Storage temperature                        | -                       | 5 / +25 °C            |
| Solvents                                   | -                       | NO                    |
| VOC emissions                              | -                       | 0 % (class A+)        |

NOTE: Store the product in a dry, covered location for no more than 12 months

## CODES AND DIMENSIONS

| code              | ex code | B [mm] | L [m] | pcs/box |
|-------------------|---------|--------|-------|---------|
| <b>PROTECT330</b> | D67222  | 330    | 10    | 2       |
| <b>PROTECT500</b> | D67225  | 500    | 10    | 1       |