


BYTUM BAND


Self-adhesive bituminous band, can be plastered

Adhesive bituminous compound with polypropylene (PP) fabric support, and separation layer

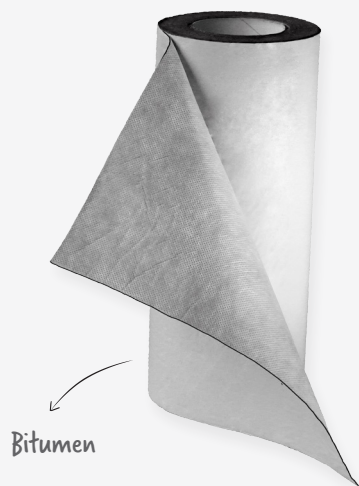

CAN BE PLASTERED

Polypropylene means the fabric can be plastered, offering greater versatility



COST / PERFORMANCE

The bituminous mixture guarantees good adhesiveness, even on concrete



CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
BYTBAND240	D67232	240	15	2
BYTBAND370	D67233	370	15	1

TECHNICAL SPECIFICATIONS

property	standard	value
Thickness	EN 1849-1	1.0 mm
Break point load MD/CD	EN 12311-1	168.5 / 120 N
Elongation at break point MD/CD	EN 12311-1	76.5 / 135 %
Application temperature	-	+5 / +40 °C
Temperature resistance	-	-20 / +80 °C
Reaction to fire	EN 11925-2 / EN 13501-1	class E
Adhesion on concrete with PRIMER	ASTM D 1000	4.9 N/mm
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	0 % (class A+)

NOTE: Store the product in a dry, covered location for no more than 12 months