


FLEXI BAND


Universal single-sided high-adhesive tape

Polyethylene (PE) support with acrylic glue, reinforcing grid and separation layer

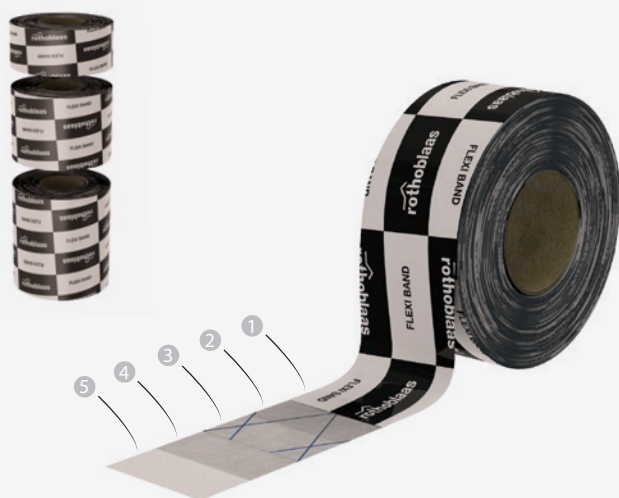


UNIVERSAL

Excellent adhesive force and resistance on all surfaces



HIGH PERFORMANCE

Guaranteed adhesion over time, even on dusty, porous or damp surfaces

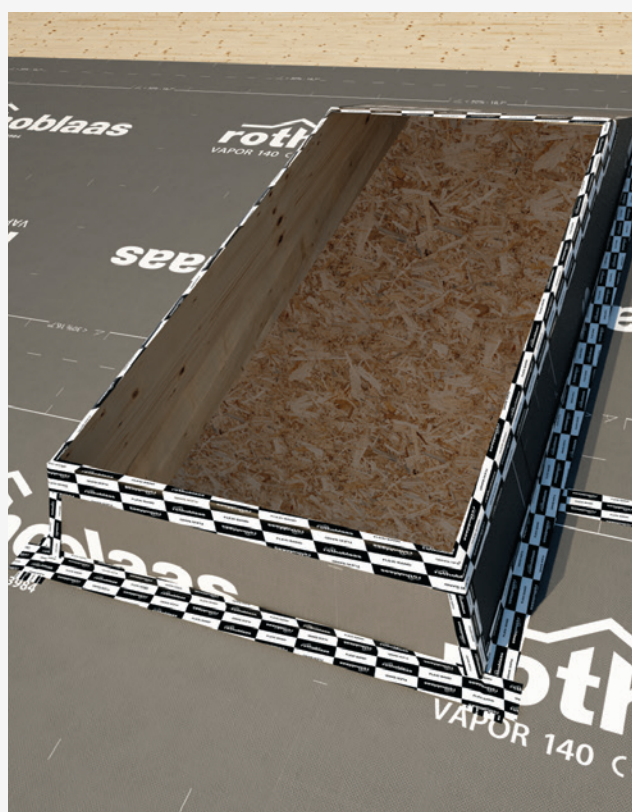

TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	DIN EN 1942	0.34 mm
Tear strength	DIN EN 14410	> 50 N/25 mm
Expansion capacity	DIN EN 14410	20 %
Adhesiveness	DIN EN 1939	> 30 N/25 mm
Water vapour transmission (Sd)	EN 1931	40 m
Temperature resistance	-	-40 / +80 °C
Application temperature	-	-10 / +40 °C
UV resistance	-	6 months
Watertightness	-	conforming
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	< 0.02 % (class A+)

NOTE: Store the product in a dry, covered location

CODES AND DIMENSIONS

code	ex code	liner [mm]	B [mm]	L [m]	pcs/box
FLEXI60	D52114	-	60	25	10
FLEXI100	D52116	-	100	25	6
FLEXI5050	D52118	50 / 50	100	25	6
FLEXI7575	D52117	75 / 75	150	25	4


COMPOSITION

- ① support: PE film
- ② glue: acrylate dispersion without solvents
- ③ reinforcing layer: reinforcing PE grid
- ④ glue: acrylate dispersion without solvents
- ⑤ separation layer: silicone paper

EASY BAND

Universal single-sided tape

Polyethylene (PE) support with acrylic glue, reinforcing grid and separation layer

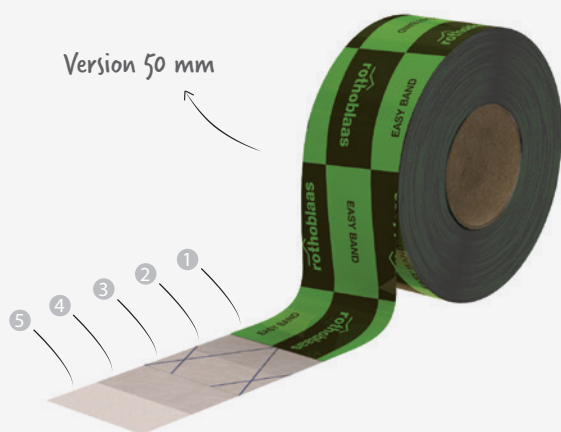



VERSATILE

Progress adhesion, stable over time, for the most common supports



INDUSTRIAL USE

Adhesive mix and supply, also designed for prefabrication

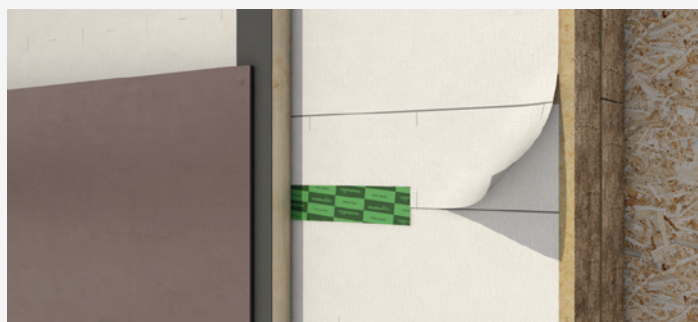

TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	DIN EN 1942	0.28 mm
Adhesiveness	DIN EN 1939	> 35 N/25 mm
Water vapour transmission (Sd)	EN 1931	30 m
Temperature resistance	-	-40 / +100 °C
Application temperature	-	> +5 °C
UV resistance	-	4 months
Watertightness	-	conforming
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	< 0.02 % (class A+)

NOTE: Store the product in a dry, covered location

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
EASY50	D52146	50	25	24
EASY60	D52145	60	25	24

COMPOSITION

- ① support: PE film
- ② glue: acrylate dispersion without solvents
- ③ reinforcing layer: reinforcing PE grid
- ④ glue: acrylate dispersion without solvents
- ⑤ separation layer: silicone paper