


MULTI BAND


Universal single-sided tape that can be plastered

Polyester (PL) fabric support with acrylic glue and separation layer

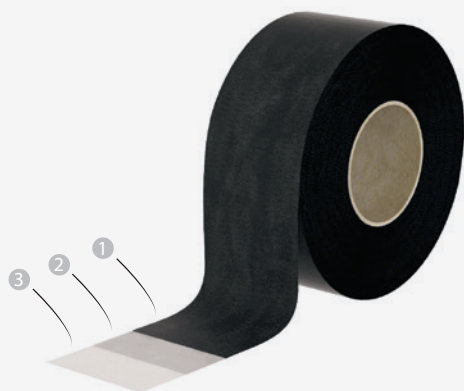



UNIVERSAL

Perfect for both internal and external sealing and for overlapping on UV-ray resistant membranes



CAN BE PLASTERED

Technical fabric ideal for application under plaster

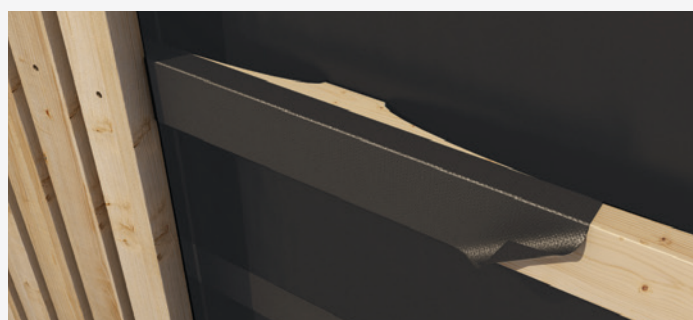

TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	DIN EN 1942	approx. 0.40 mm
Tear strength	DIN EN 14410	> 25 N/25mm
Expansion capacity	DIN EN 14410	> 50 %
Adhesiveness	DIN EN 1939	> 16 N/25 mm
Water vapour transmission (Sd)	EN 1931	< 0.1 m
Temperature resistance	-	-40 / +90 °C
Application temperature	-	> -10 °C
UV resistance	-	6 months
Watertightness	-	conforming
Storage temperature	-	+15 / +30 °C
Solvents	-	NO
VOC emissions	-	0 % (class A+)

NOTE: Store the product in a dry, covered location

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
MULTI75	D52314	75	20	12

COMPOSITION

- ① **support:** non-woven PL fabric
- ② **glue:** acrylate dispersion without solvents
- ③ **separation layer:** silicone paper