


CONNECT BAND



Sealing wall barrier for irregular foundationw


EPDM support with self-expanding tapes made of impregnated polyurethane foam

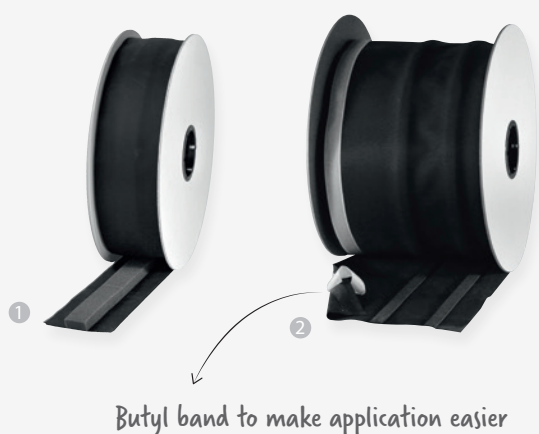

Butyl band to make application easier


DOUBLE PROTECTION

Protects wood from rising damp and ensures excellent airtightness



ADJUSTABLE

Adhesive PU foam profiles make it possible to compensate for any irregularities in the foundation



TECHNICAL SPECIFICATIONS


property	standard	value
Tensile strength	DIN 53504	≥ 6.5 MPa
Resistance to tearing	DIN 53504	≥ 25 kN/m
Elongation	DIN 53504	≥ 300 %
Leakage transmission coefficient	EN 12114	$\alpha < 0.1 \text{ m}^3 [\text{h} \times \text{m} \times (\text{daPa})^n]$
Thermal conductivity (λ)	DIN 52612	0.042 W/mK
Reaction to fire	EN 13501	class E
Months of UV or ozone resistance	DIN 7864 T1	conforming
Water vapour resistance factor (μ)	EN 1931	32000
Temperature resistance	-	-30 / +100 °C
Application temperature	-	+5 / +35 °C
Storage temperature	-	+1 / +25 °C
Solvents	-	NO
VOC emissions	-	< 0.02 % (class A+)

NOTE: Store the product in a dry, covered location for no more than 12 months

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
1 CONNECT100	D67262	100	25	3
2 CONNECT250	D67264	250	25	1

1 CONNECT100



2 CONNECT250

