


ORION ROLL


Adjustable aluminium under-ridge

Prepainted adjustable aluminium profile with pre-bored hole and adhesive butyl cord

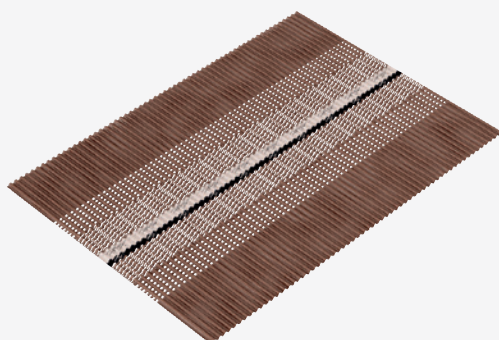



QUALITY

Prepainted aluminium with adhesive butyl cords using a special mix, for perfect adaptability




ADJUSTABLE


Provided with pre-bored holes, allows adjustment of ventilation based on requirements

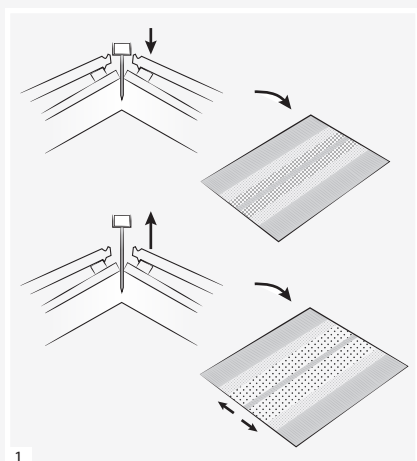

Adjust the under-ridge based on the required height

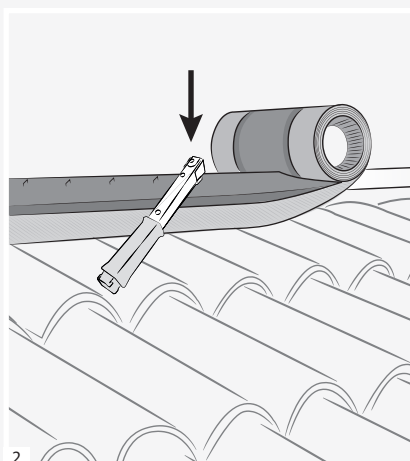

Unroll the under-ridge on the wood batten, attach with staples every 50 - 60 cm

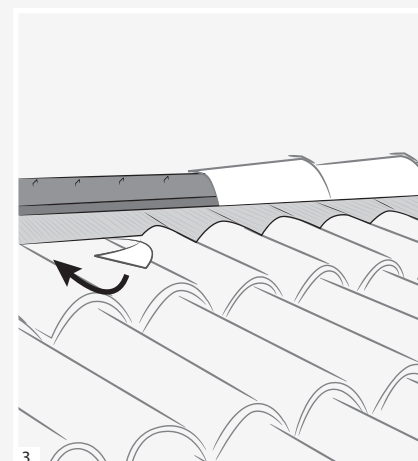

Remove the protective film and shape the pleated strip to the tile profile

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	colour	pcs/box
ORIONRED380	D71362	320 - 380	5	red-brick	4
ORIONBRO380	D71364	320 - 380	5	brown	4

TECHNICAL SPECIFICATIONS

property	standard	value
Air passage	DIN 4108-3	approx. 120 - 150 cm ² /m
Butyl cord thermal resistance	-	-40 / +90 °C
Application temperature	-	+5 / +40 °C
UV resistance	-	permanent
Watertightness (if installed under tiles)	-	conforming
Storage temperature	-	+5 / +30 °C

NOTE: Store the product in a dry, covered location